
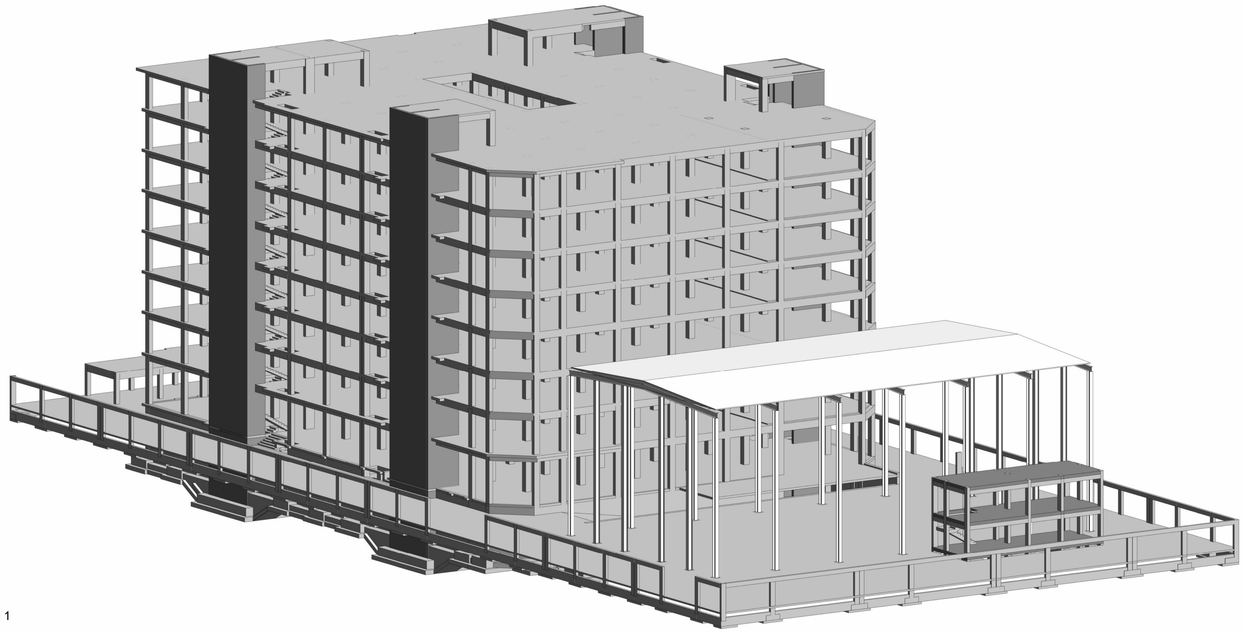


1 3D VIEW 1

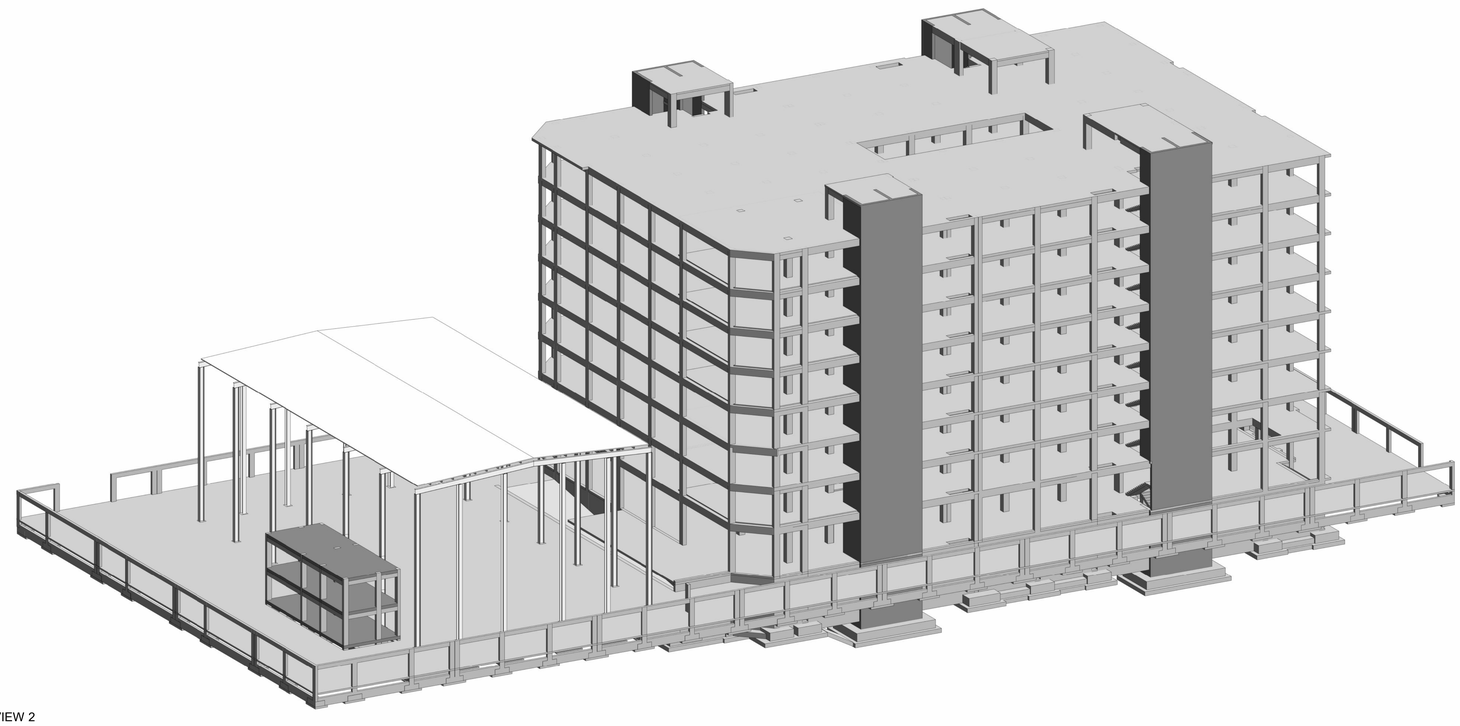

2 3D VIEW 2

Sheet List	
Sheet Name	Sheet Number
COVER SHEET	A100
RC FOUNDATION LAYOUT- ADMIN BUILDING	A101
RC FOUNDATION LAYOUT - STEEL BUILDING&OFFICE	A102
COLUMNS&AXIS LAYOUT PLAN- ADIMN BULDING	A103
COLUMNS&AXIS LAYOUT PLAN- STEEL BUILDING	A104
RC LAYOUT FOR BASEMENT FLOOR	A105
RC LAYOUT FOR FIRST FLOOR	A106
RC LAYOUT FOR TEYPICAL FLOOR	A107
RC LAYOUT FOR ROOF FLOOR	A108
F1-DETAIL-RFT	A109
C1-RFT DETAIL	A110
SECTIONS SHEETS	A111
First Floor for Admin BUILDING-RFT-MESH BOT-X	A112
First Floor for Admin BUILDING-RFT-MESH BOT-Y	A113
B04-RFT DETAIL	A114
QS SHEETS (FLOORS & COULMNS & FOUNDATION)	A115
QS SHEETS (FRAMING & STAIR MATERIAL TAKE OFF)	A116
QS-BBS-SHEETS	A117

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


COVER SHEET

CLIENT


DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	11/11/2026 12:58:18

SCALE	PROJECT NUMBER
	KH 102


DRAWNING NUMBER	REV
A100	R00

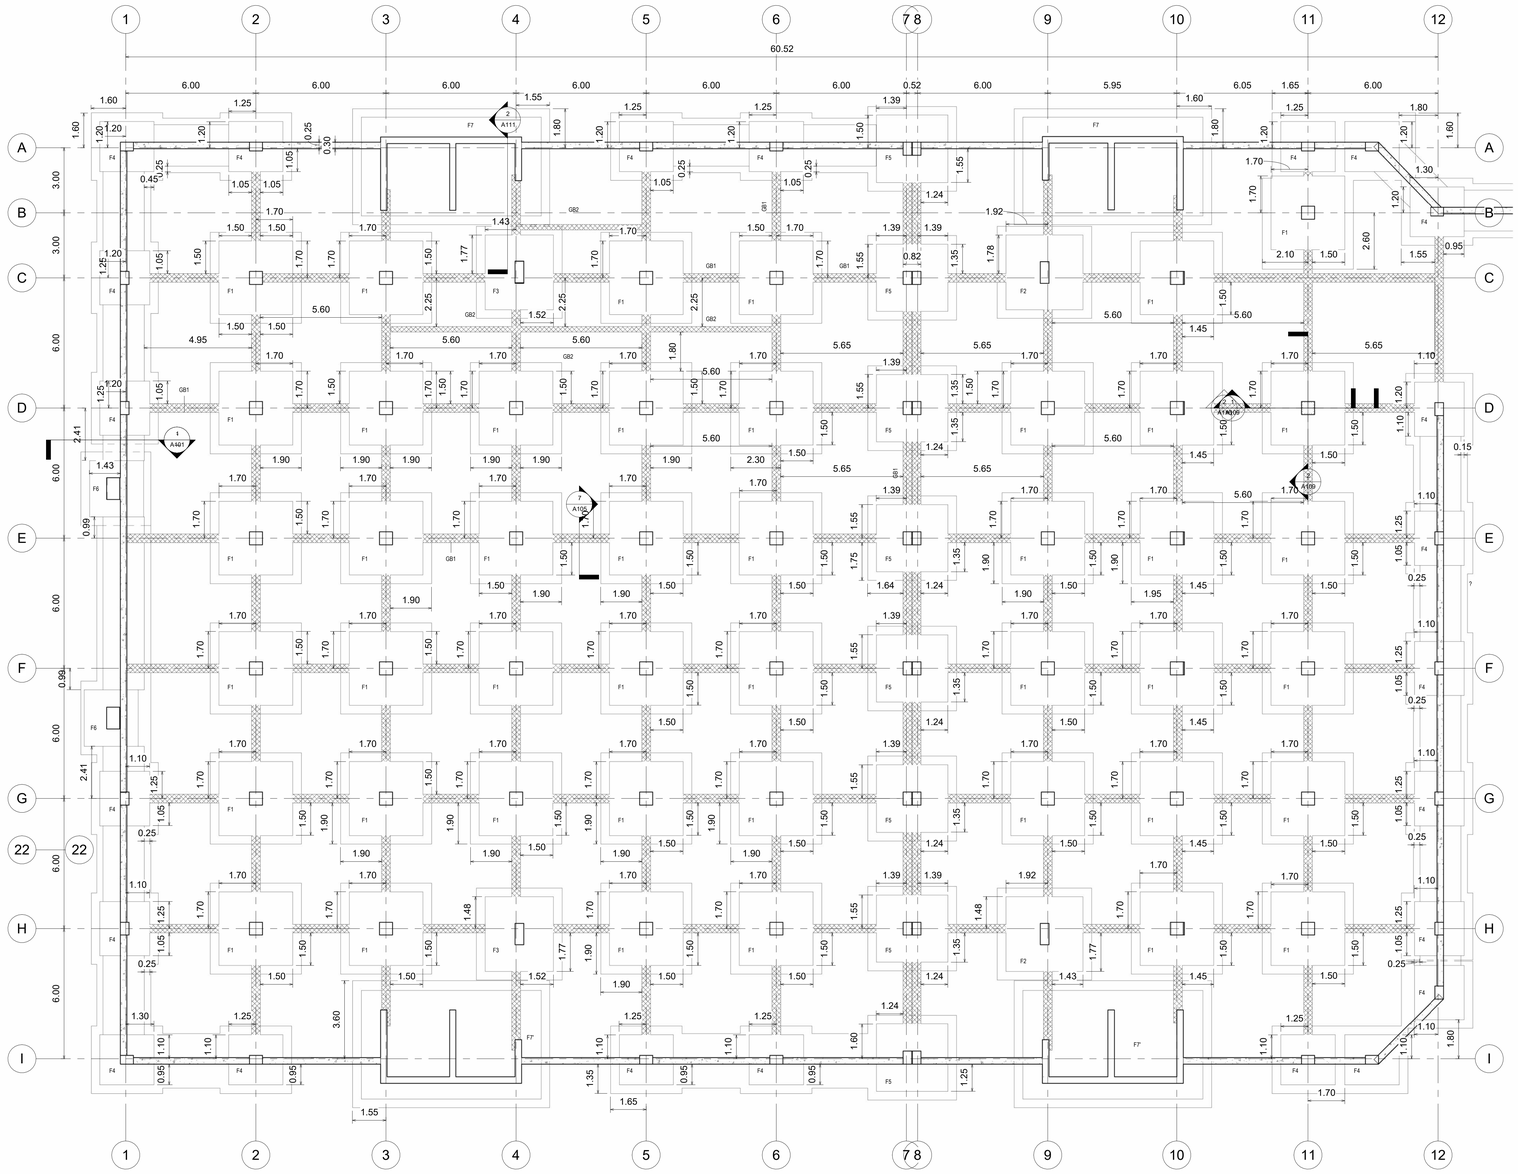


4 RC FOUNDATION LAYOUT - ADMIN BUILDING
1 : 100

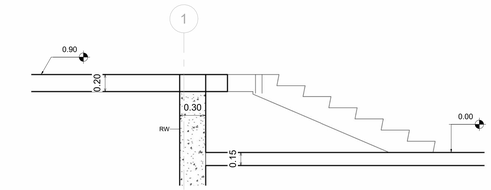


1 STAIR SEC 2
1 : 25

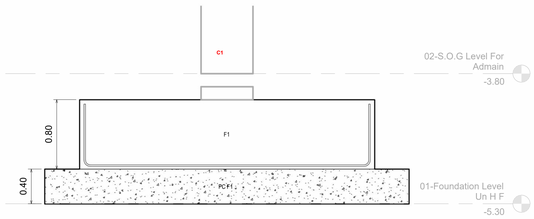


2 F1 DETAIL
1 : 25

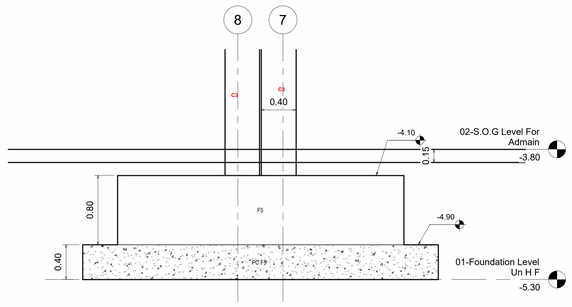

3 F5 DETAIL
1 : 25

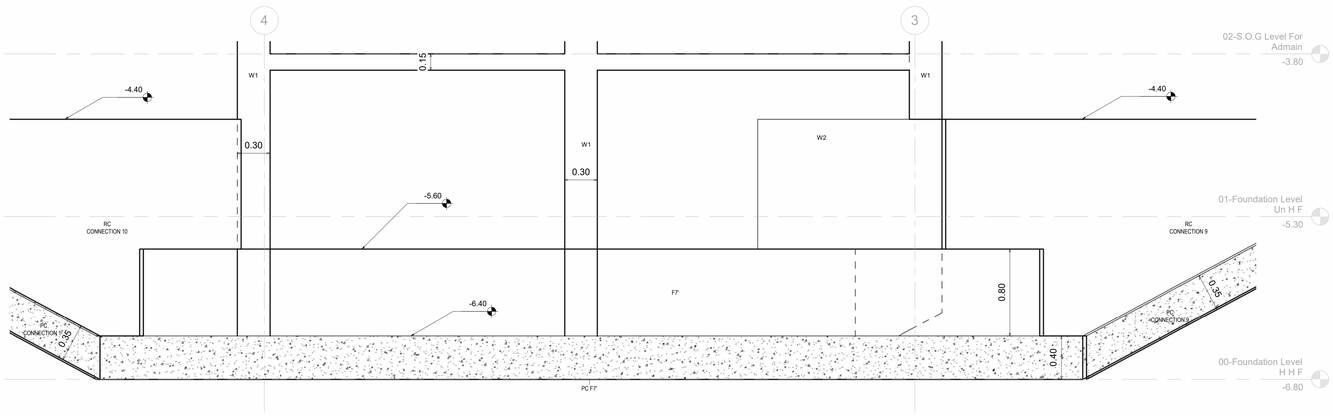

5 F7' DETAIL
1 : 20

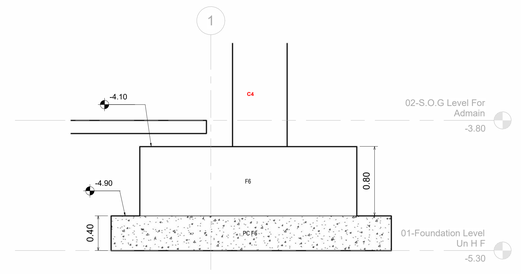

6 F6 DETAIL
1 : 25

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


RC FOUNDATION LAYOUT- ADMIN BUILDING

CLIENT


DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	11/11/2026 12:58:42

SCALE	PROJECT NUMBER
As indicated	KH 102


DRAWNING NUMBER	REV
A101	R00

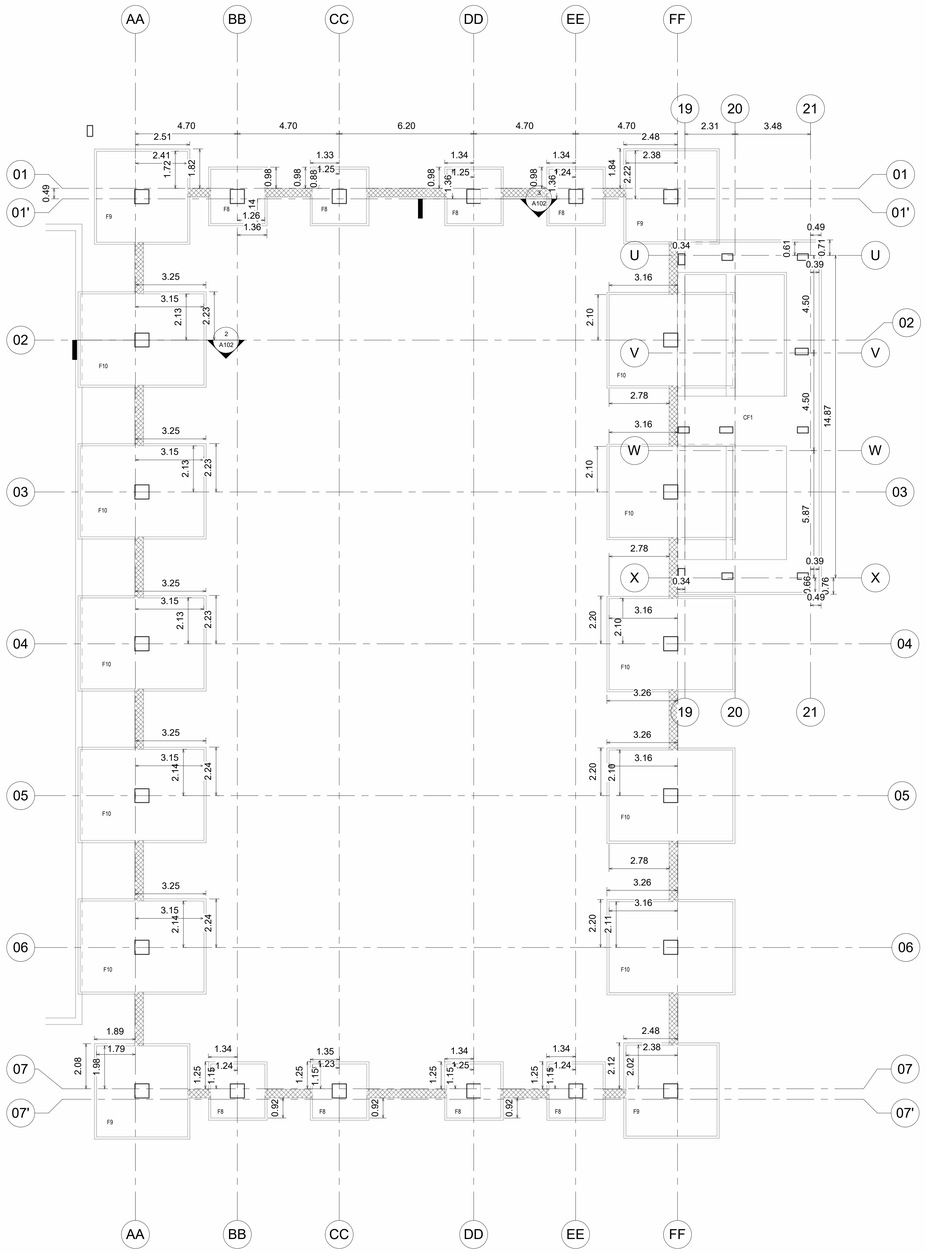


5 RC FOUNDATION LAYOUT - STEEL BUILDING
1 : 100

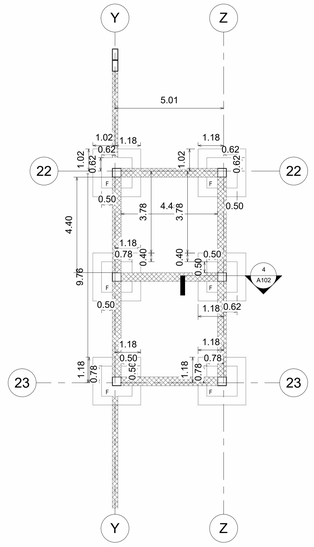


1 RC FOUNDATION LAYOUT -OFFICE
1 : 100

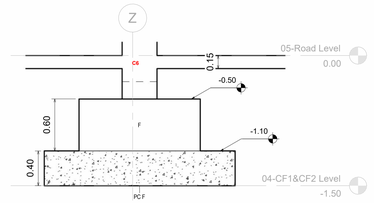

4 F DETAIL
1 : 25

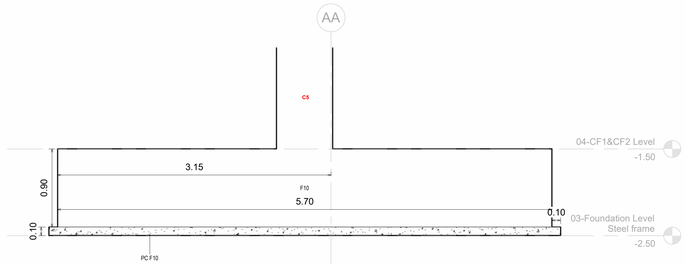

2 F10 DETAIL
1 : 25

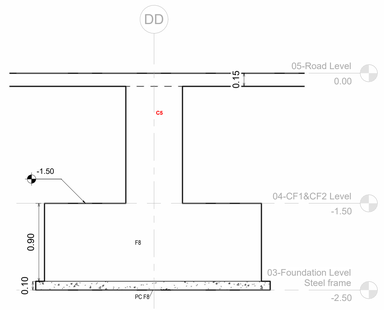

3 F8 DETAIL
1 : 25

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


RC FOUNDATION LAYOUT - STEEL BUILDING&OFFICE

CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	11/11/2026 12:59:04

SCALE	PROJECT NUMBER
As indicated	KH 102

DRAWNING NUMBER	REV
A102	R00

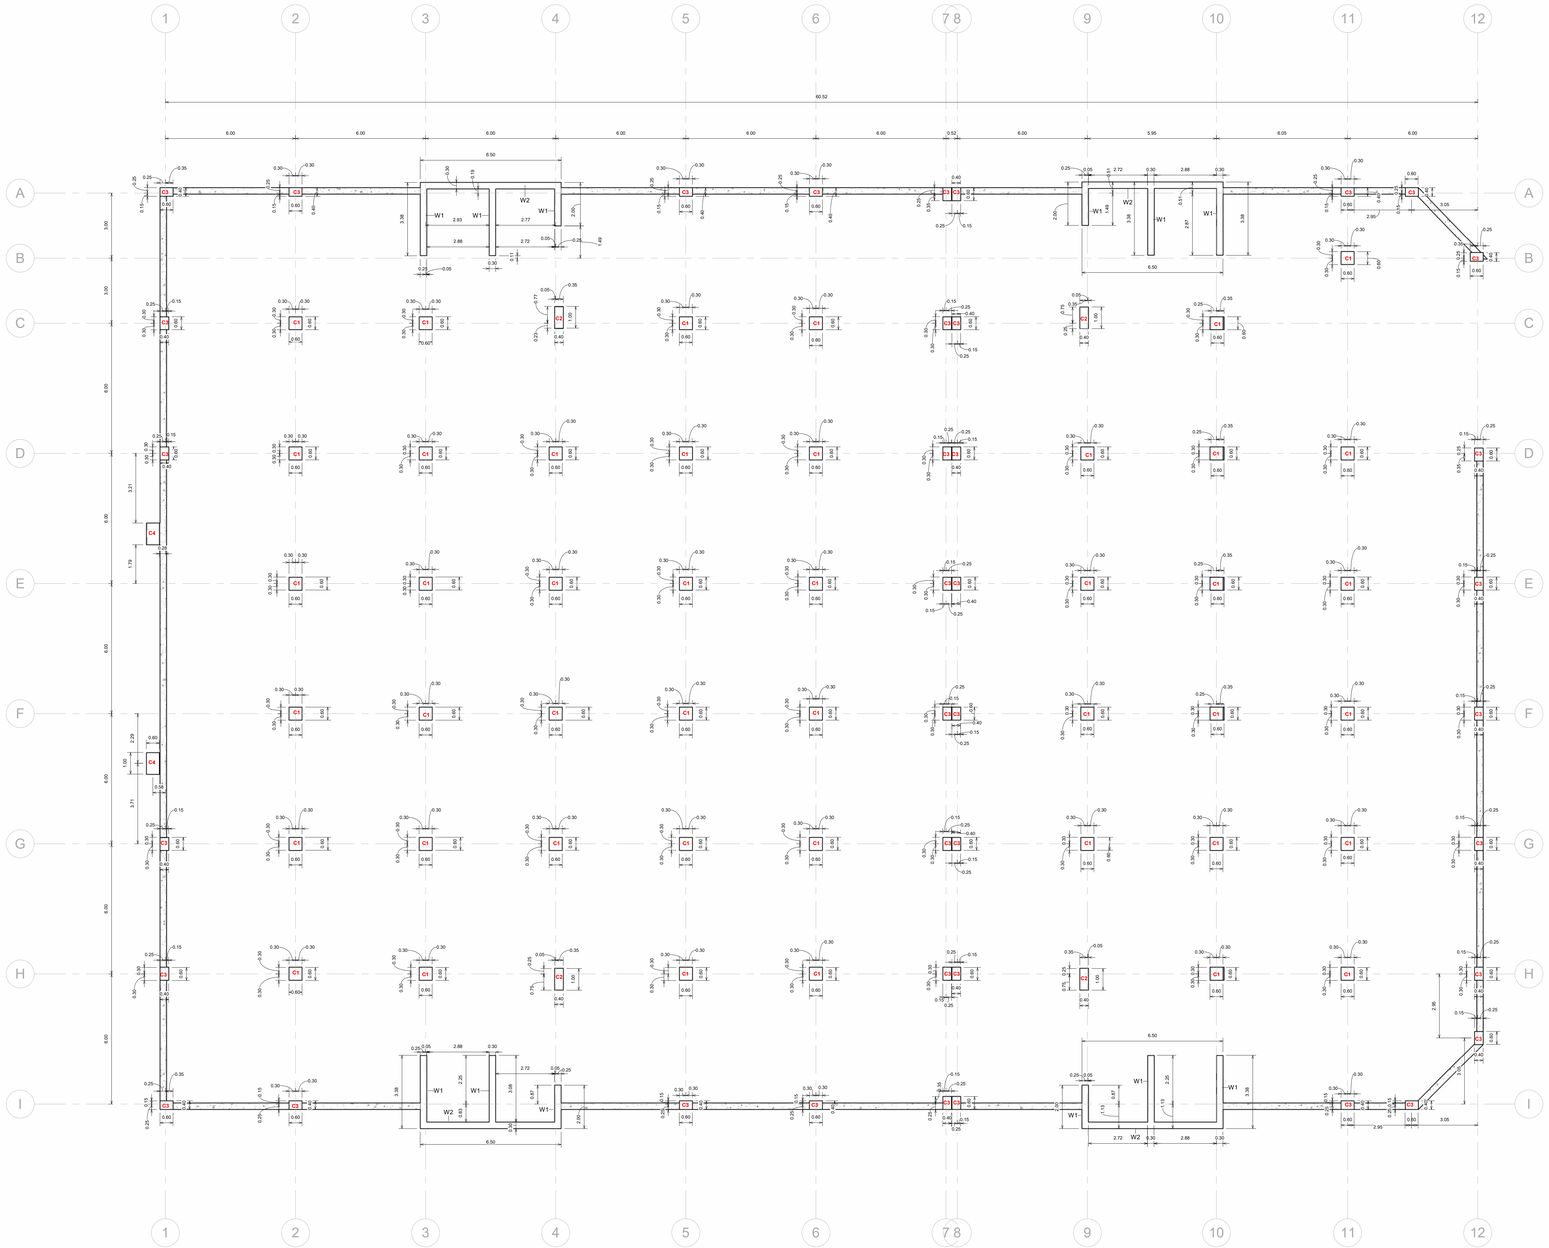

1 COLUMNS&AXIS LAYOUT PLAN - ADIMN BULDING

1 : 100

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


COLUMNS&AXIS LAYOUT PLAN- ADIMN BULDING

CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	11/11/2026 12:59:28

SCALE	PROJECT NUMBER
1 : 100	KH 102

DRAWNING NUMBER	REV
A103	R00

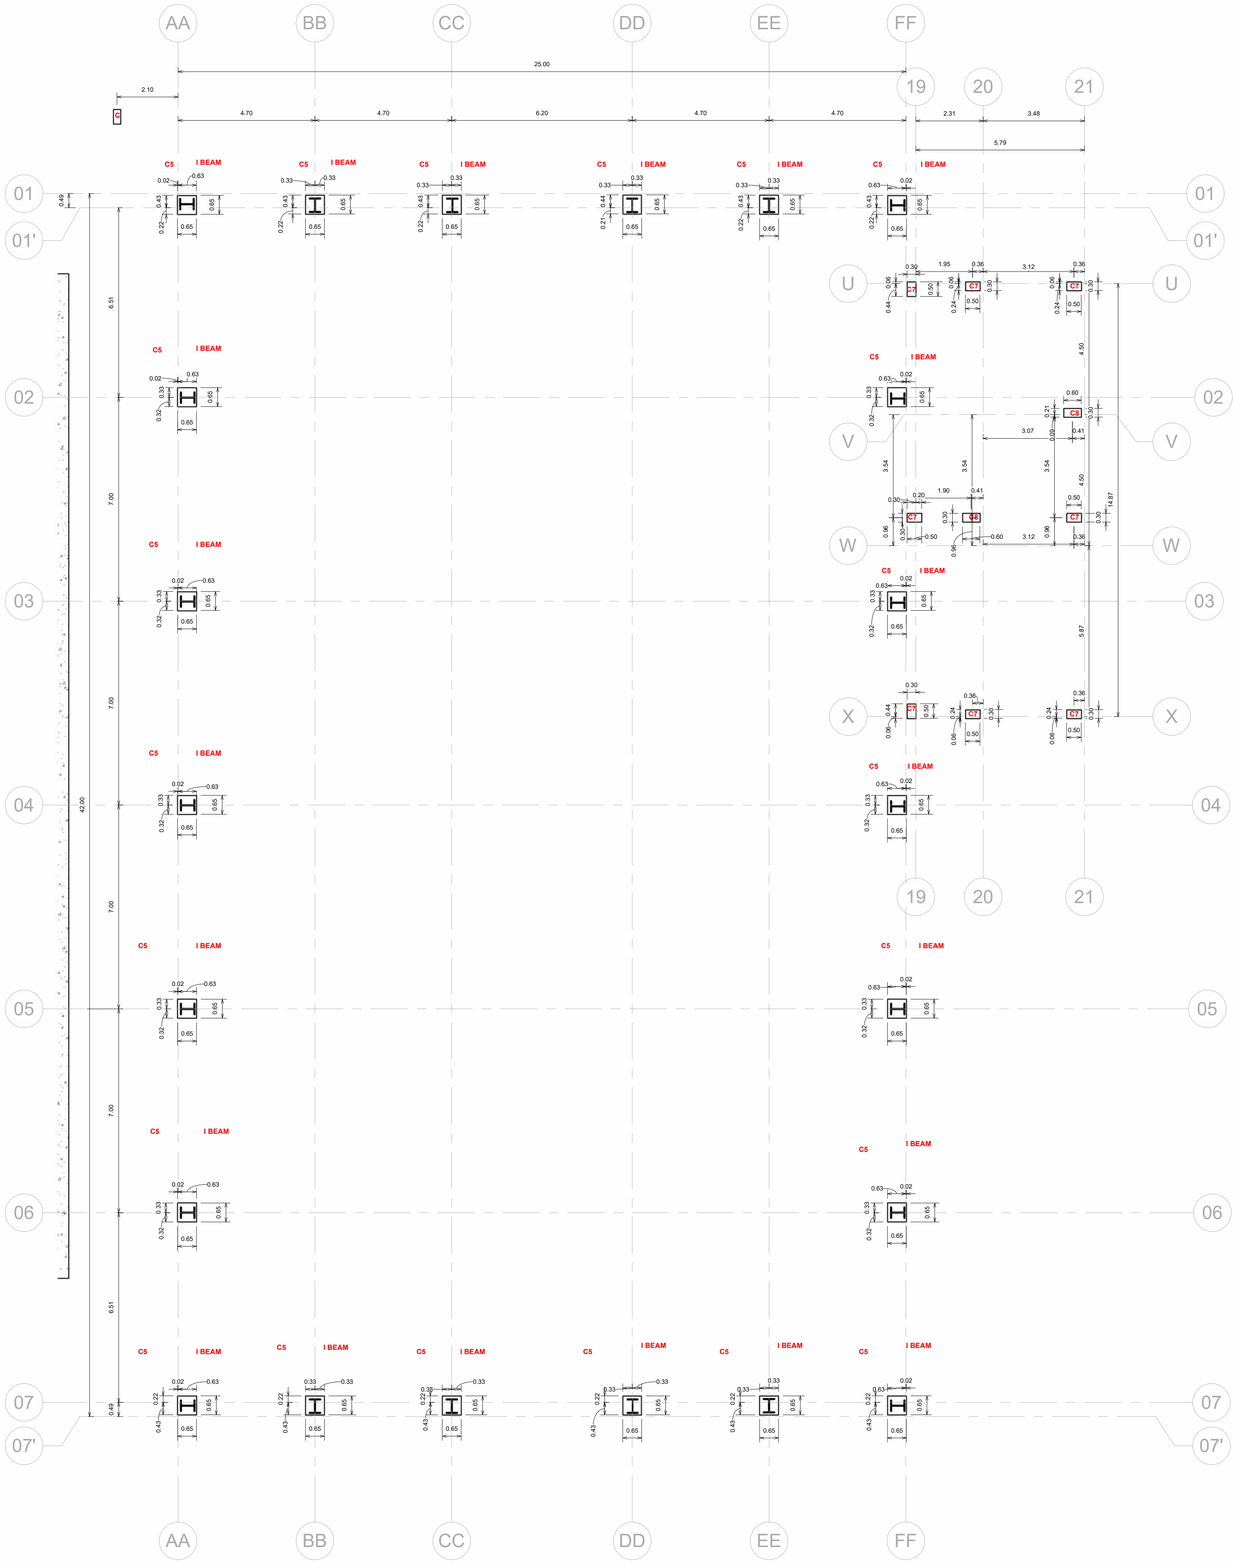

2 COLUMNS&AXIS LAYOUT PLAN - STEEL BUILDING

1 : 100

CONSULTANT

CONTRACTOR

NOTES

KEY PLAN

REVISION SCHEDULE

REV	Date	ISSUED FOR	Issued by	Issued to
R00	19/1/2026	ISSUED FOR CONSTRUCTION		

DISCIPLINE

SHEET TILLE

COLUMNS&AXIS LAYOUT PLAN- STEEL BUILDING

DRW BY :

Khalid Atef

CHK BY :


Checker

SCALE


1 : 100

REVISION


R00

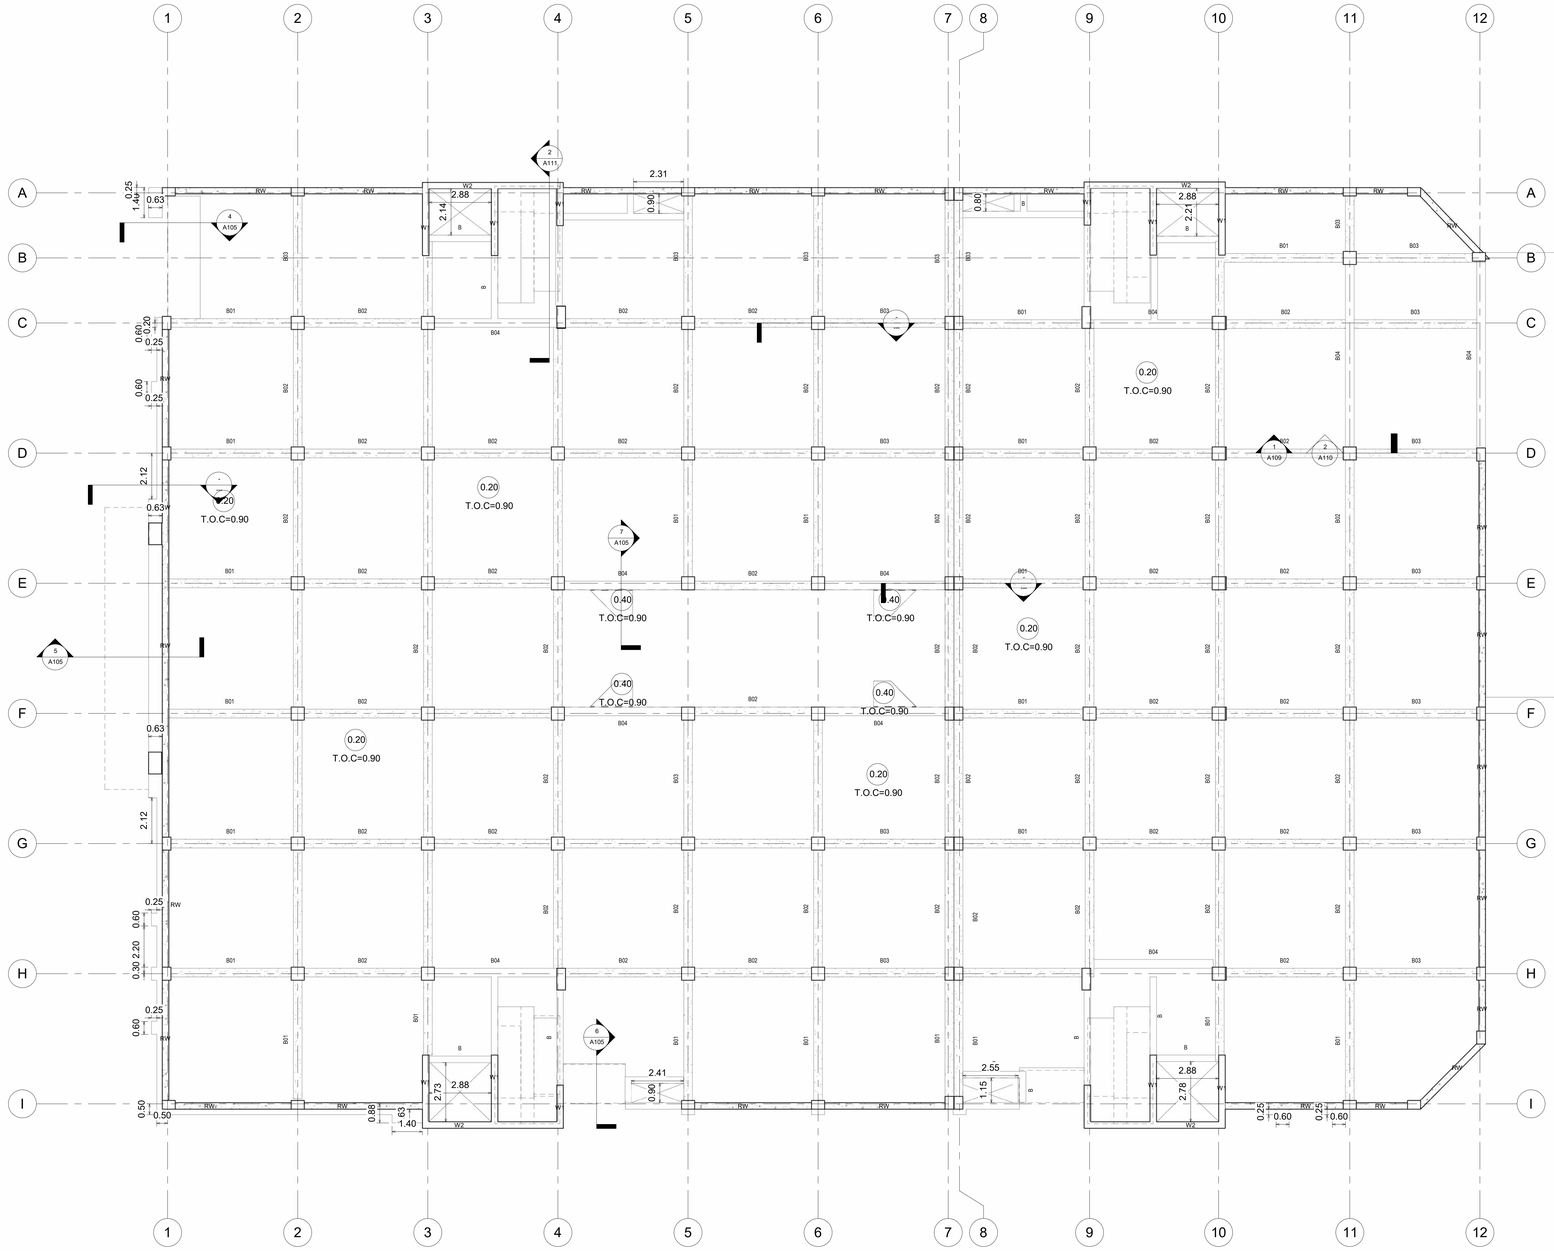


1 10-Basement Floor Level-ADMIN BULDING
1 : 100

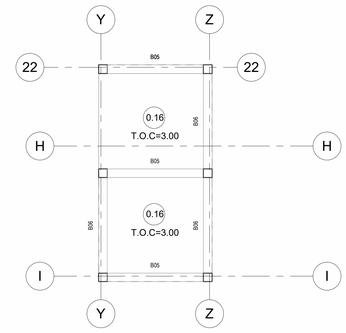


2 10-Basement Floor Level-OFFICE
1 : 100

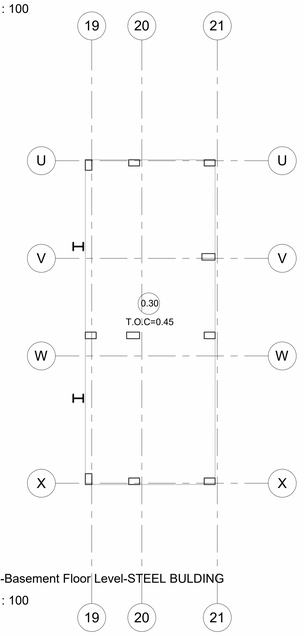


3 10-Basement Floor Level-STEEL BULDING
1 : 100

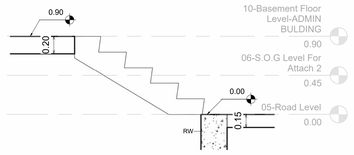


4 STAIR
1 : 25

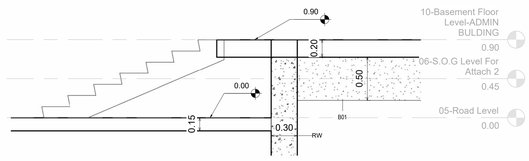

5 STAIR 2
1 : 25

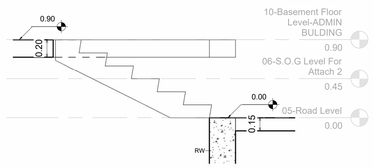

6 STAIR 3
1 : 25

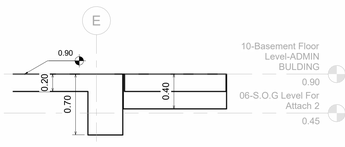

7 BASE Sec 1
1 : 25

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


RC LAYOUT FOR BASEMENT FLOOR

CLIENT


DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	11/11/2026 01:00:07

SCALE	PROJECT NUMBER
As indicated	KH 102


DRAWNING NUMBER	REV
A105	R00

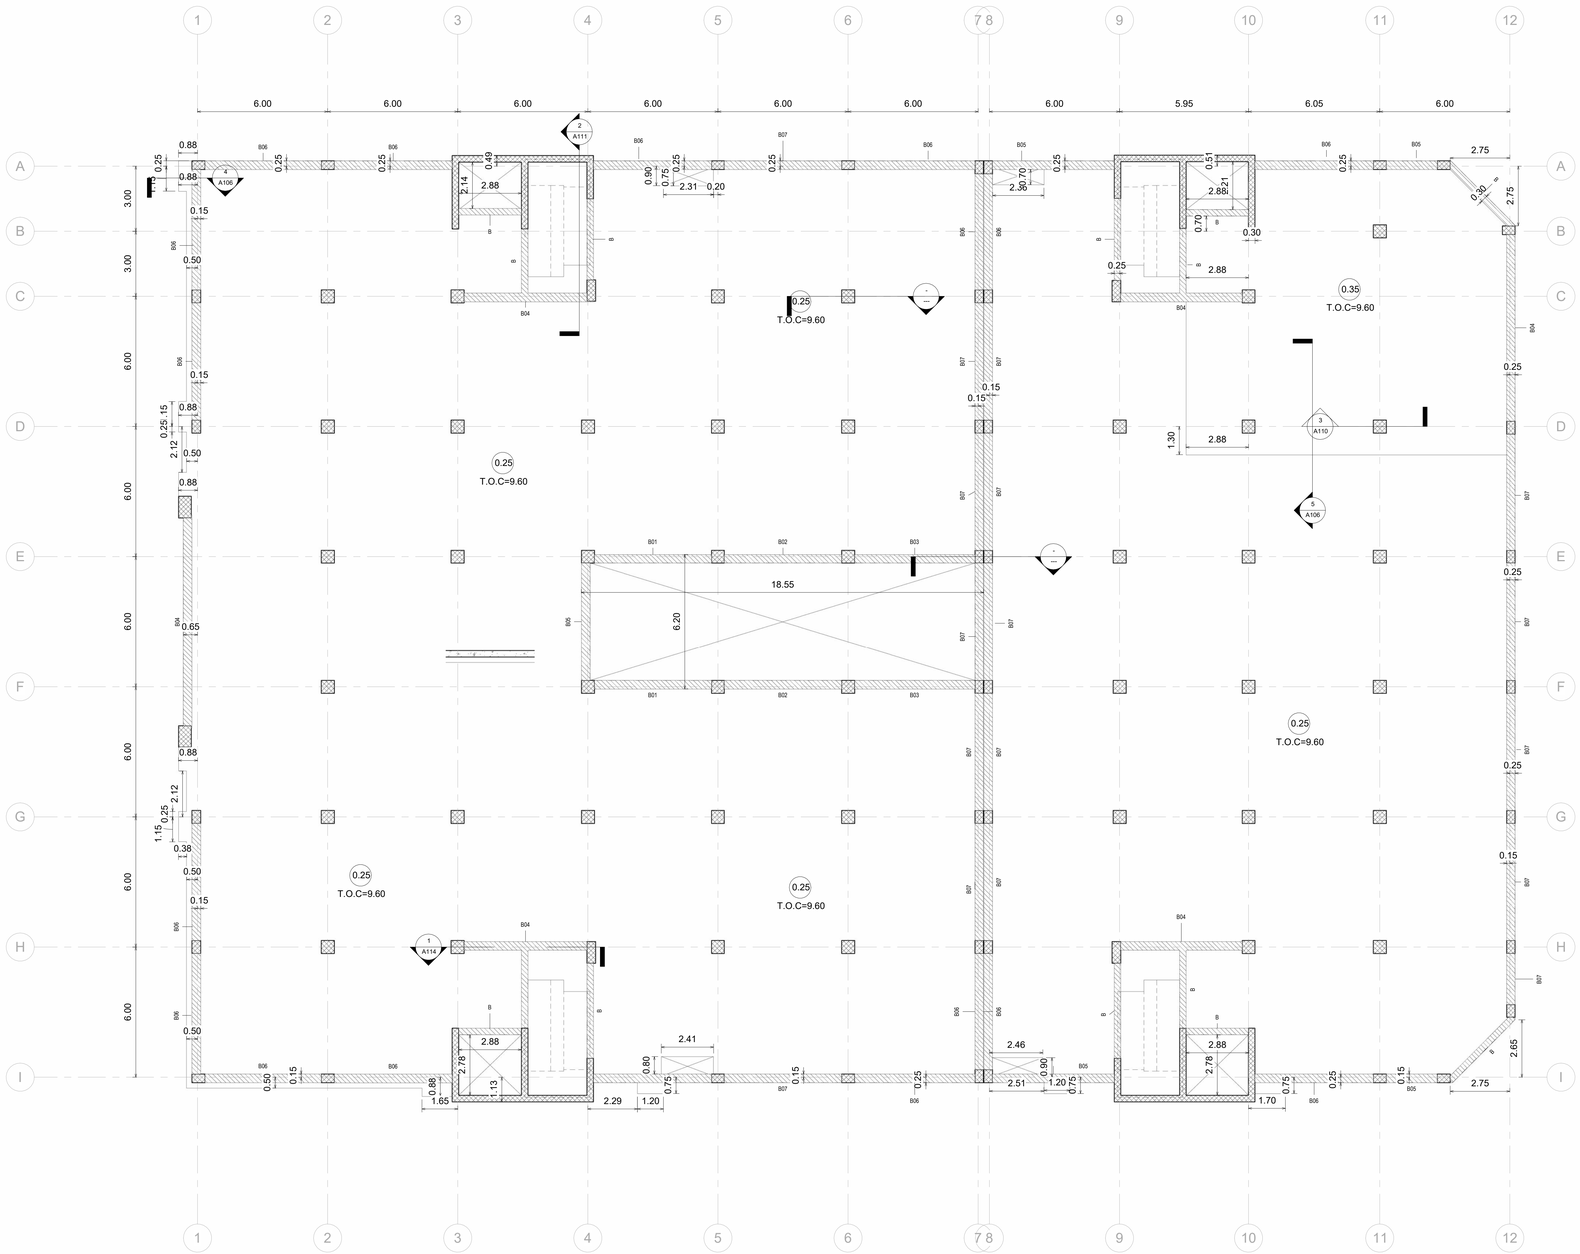


1 First Floor for Admin BUILDING
1 : 100

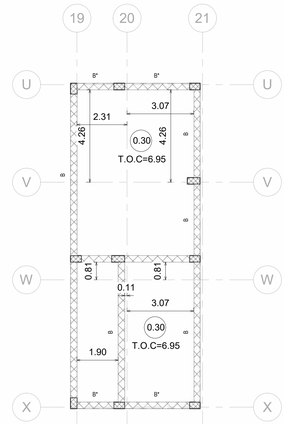

2 First Floor for Attach 2
1 : 100

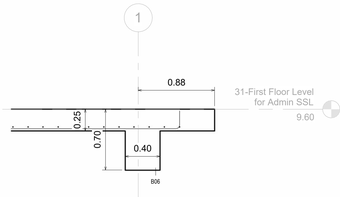

4 SEC 1-1ST FLOOR
1 : 25

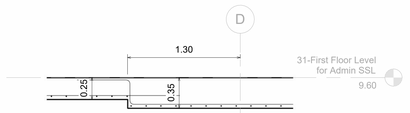

5 SEC 2-1ST FLOOR
1 : 25

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


RC LAYOUT FOR FIRST FLOOR

CLIENT


DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	11/11/2026 01:00:29

SCALE	PROJECT NUMBER
As indicated	KH 102

DRAWNING NUMBER	REV
A106	R00

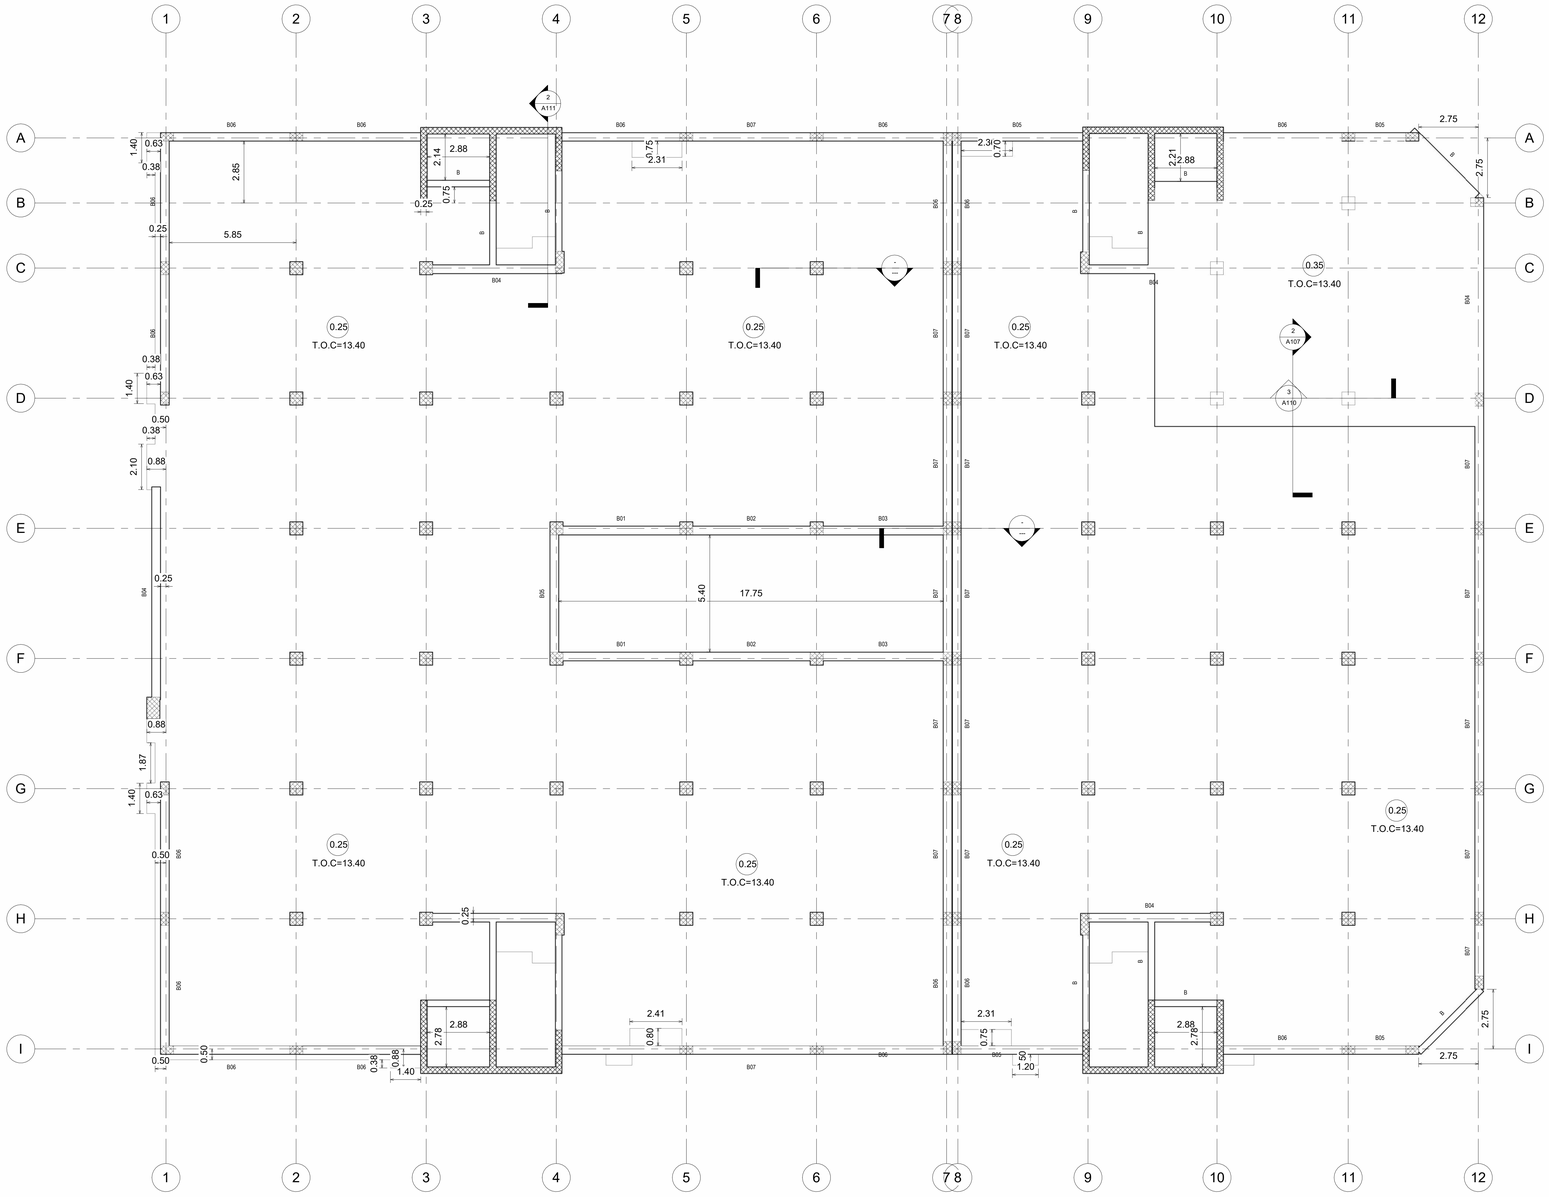

1 40-Second Floor-ADMIN BULDING
1 : 100

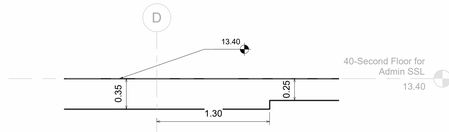

2 SECOND Sec
1 : 25

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


RC LAYOUT FOR TEYPICAL FLOOR

CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	KAITECH	11/11/2026 01:00:52

SCALE	PROJECT NUMBER
As indicated	KH 102

DRAWNING NUMBER	REV
A107	R00

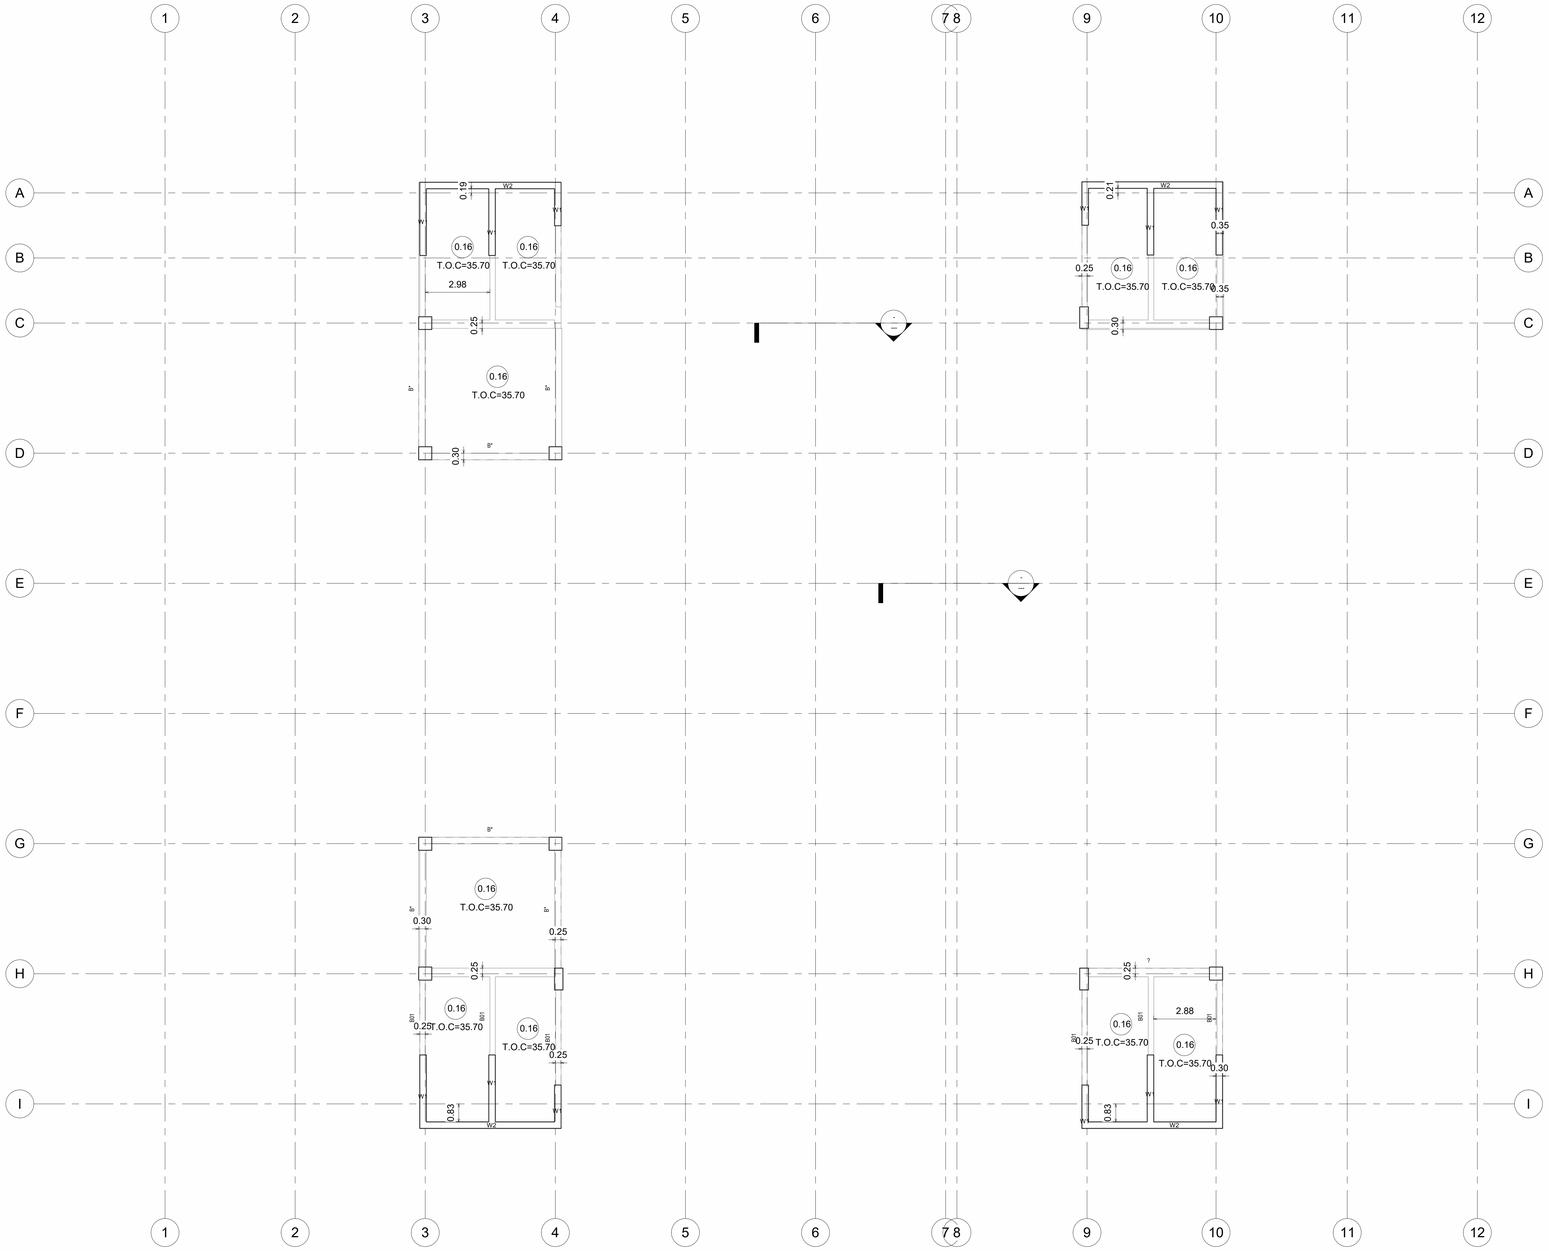

1 100-Upper Roof Floor Level for Admin SSL Copy 1

1 : 100

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


RC LAYOUT FOR ROOF FLOOR

CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	11/11/2026 01:01:12

SCALE	PROJECT NUMBER
1 : 100	KH 102

DRAWNING NUMBER	REV
A108	R00

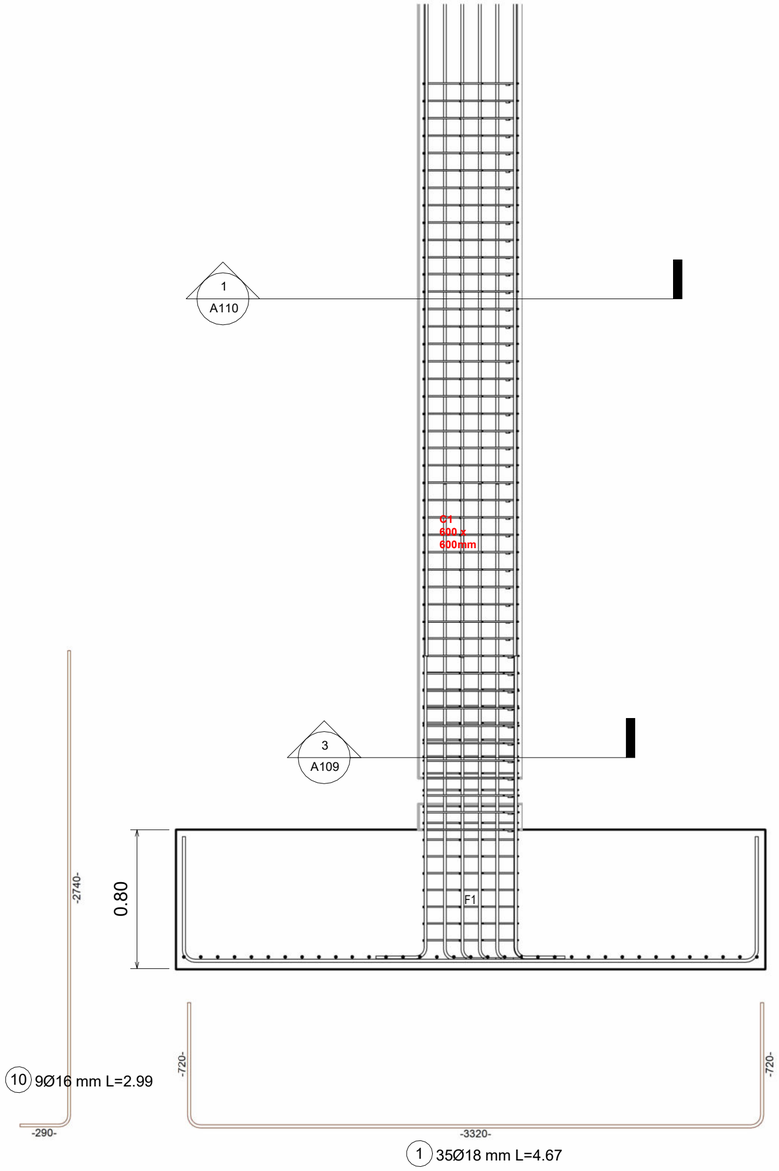


10 9Ø16 mm L=2.99

1 35Ø18 mm L=4.67

1 F1-DETAIL-RFT-1

1 : 25

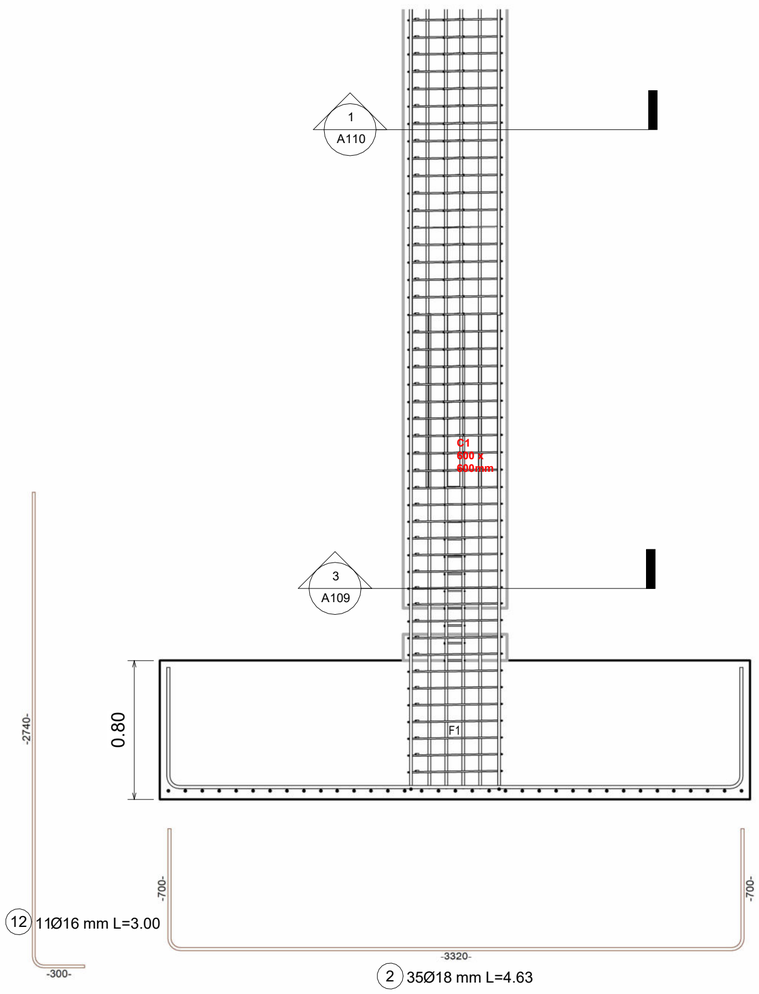


12 11Ø16 mm L=3.00

2 35Ø18 mm L=4.63

2 F1-DETAIL-RFT-2

1 : 25

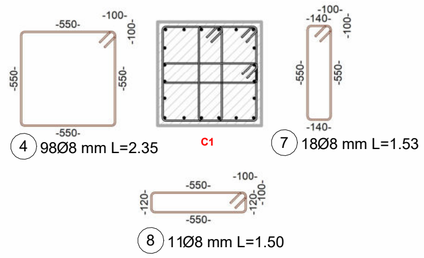

4 98Ø8 mm L=2.35

7 18Ø8 mm L=1.53

8 11Ø8 mm L=1.50

3 C1-STARTER BARS

1 : 25

No.	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/2026

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE

F1-DETAIL-RFT


CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	Issue Date


SCALE (@A2)	PROJECT NUMBER
1 : 25	KH 102

DRAWING NUMBER	REV
A109	R00


11/11/2026 01:01:18 م

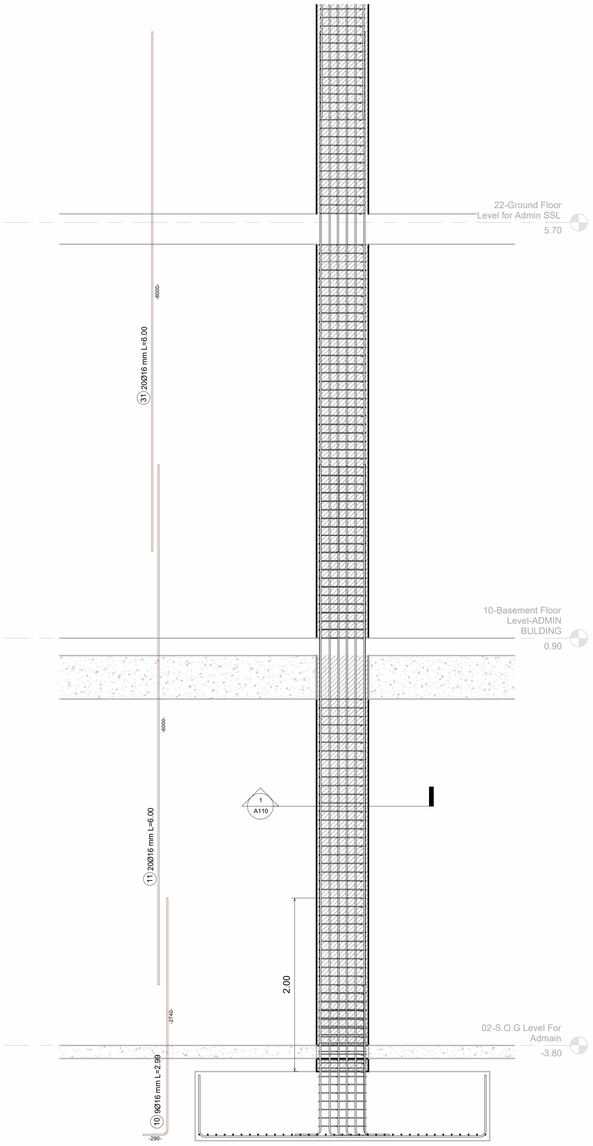


2 C1-RFT DETAIL-1
1 : 25

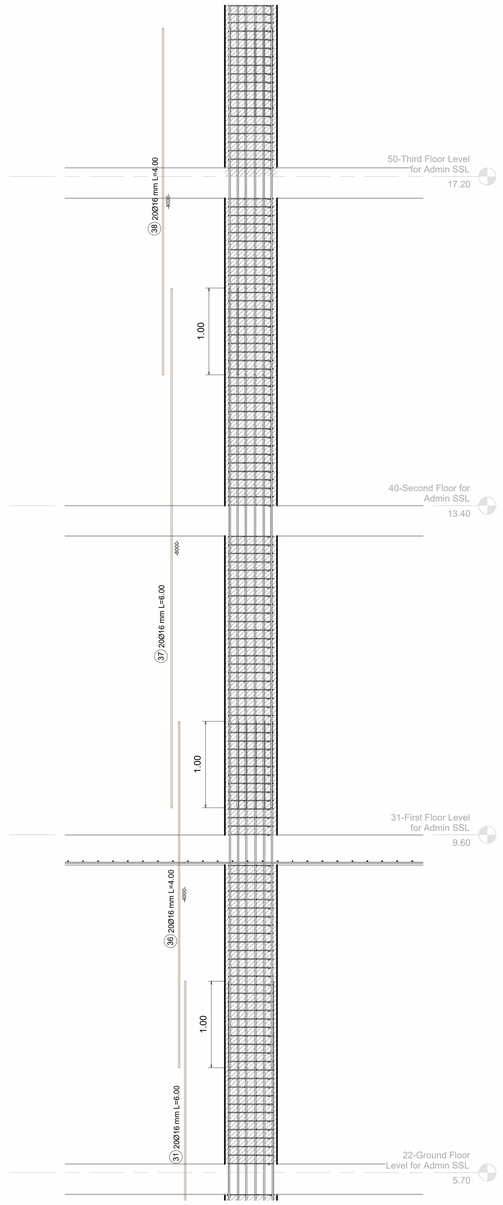

3 C1-RFT DETAIL-2
1 : 25



1 C1-CROSS SEC-RFT
1 : 25

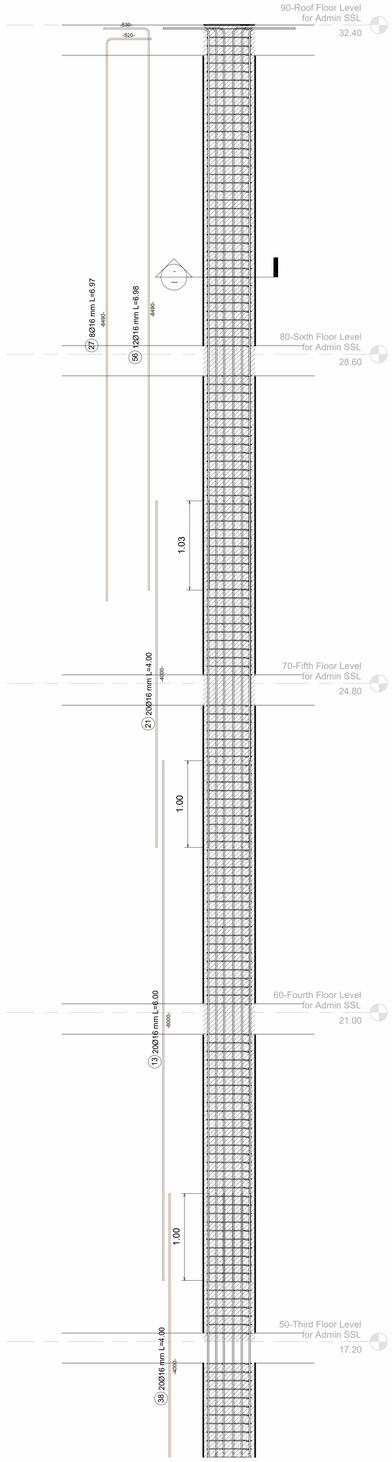

4 C1-RFT DETAIL-3
1 : 25

CONSULTANT

CONTRACTOR

NOTES

KEY PLAN

REVISION SCHEDULE

REV	Date	ISSUED FOR	Issued by	Issued to
R00	19/1/2026	ISSUED FOR CONSTRUCTION		

DISCIPLINE

SHEET TILLE

C1-RFT DETAIL

DRW BY : Khalid Atef


CHK BY : Checker

SCALE


1 : 25

REVISION


R00

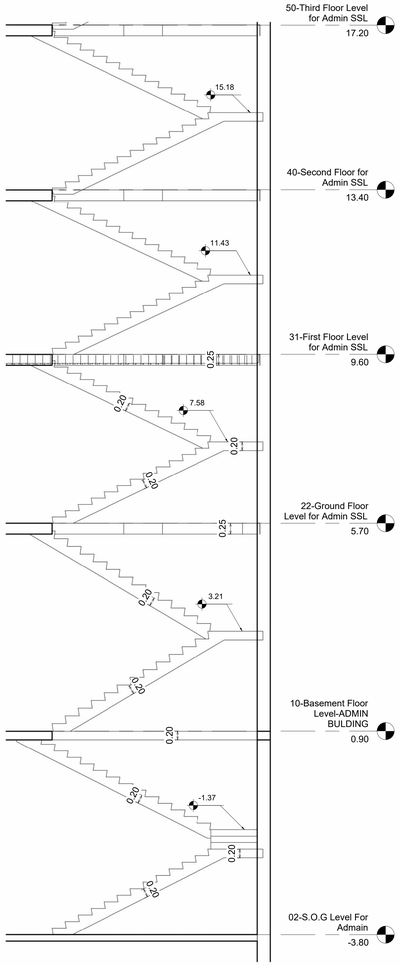


2 STAIR SEC 3
1 : 50

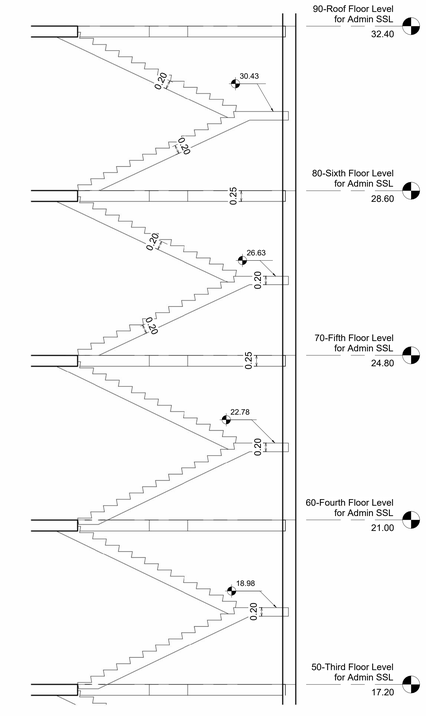


4 STAIR SEC 4
1 : 50

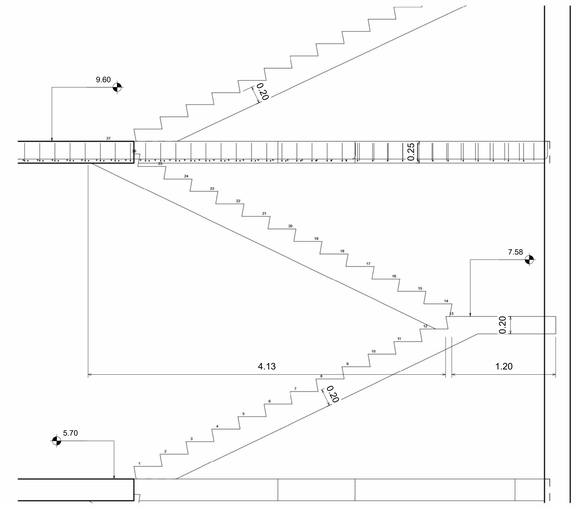


3 STAIR SEC
1 : 25

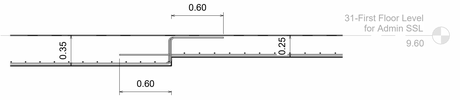

5 DROP PANAL-X DIR
1 : 25

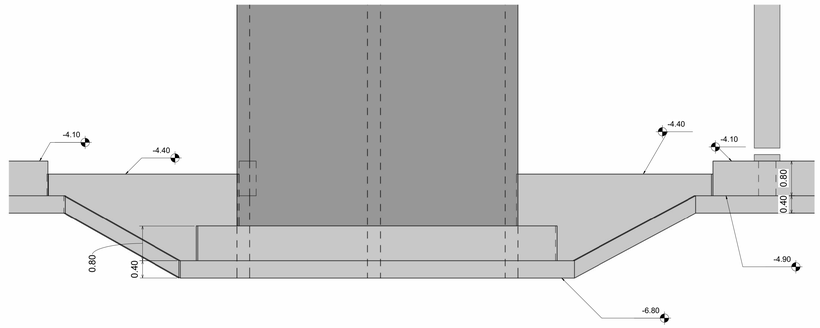

1 Hatched Footing Detail
1 : 50

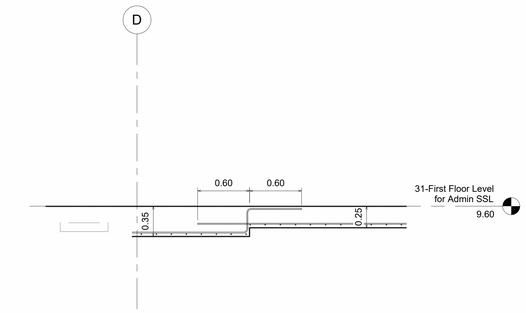

6 DROP PANAL-Y DIR
1 : 25

CONSULTANT

CONTRACTOR

NOTES

KEY PLAN

REVISION SCHEDULE

REV	Date	ISSUED FOR	Issued by	Issued to
R00	19/1/2026	ISSUED FOR CONSTRUCTION		

DISCIPLINE

SHEET TILLE

SECTIONS SHEETS

DRW BY : Khalid Atef


CHK BY : Checker

SCALE

As indicated

REVISION

R00

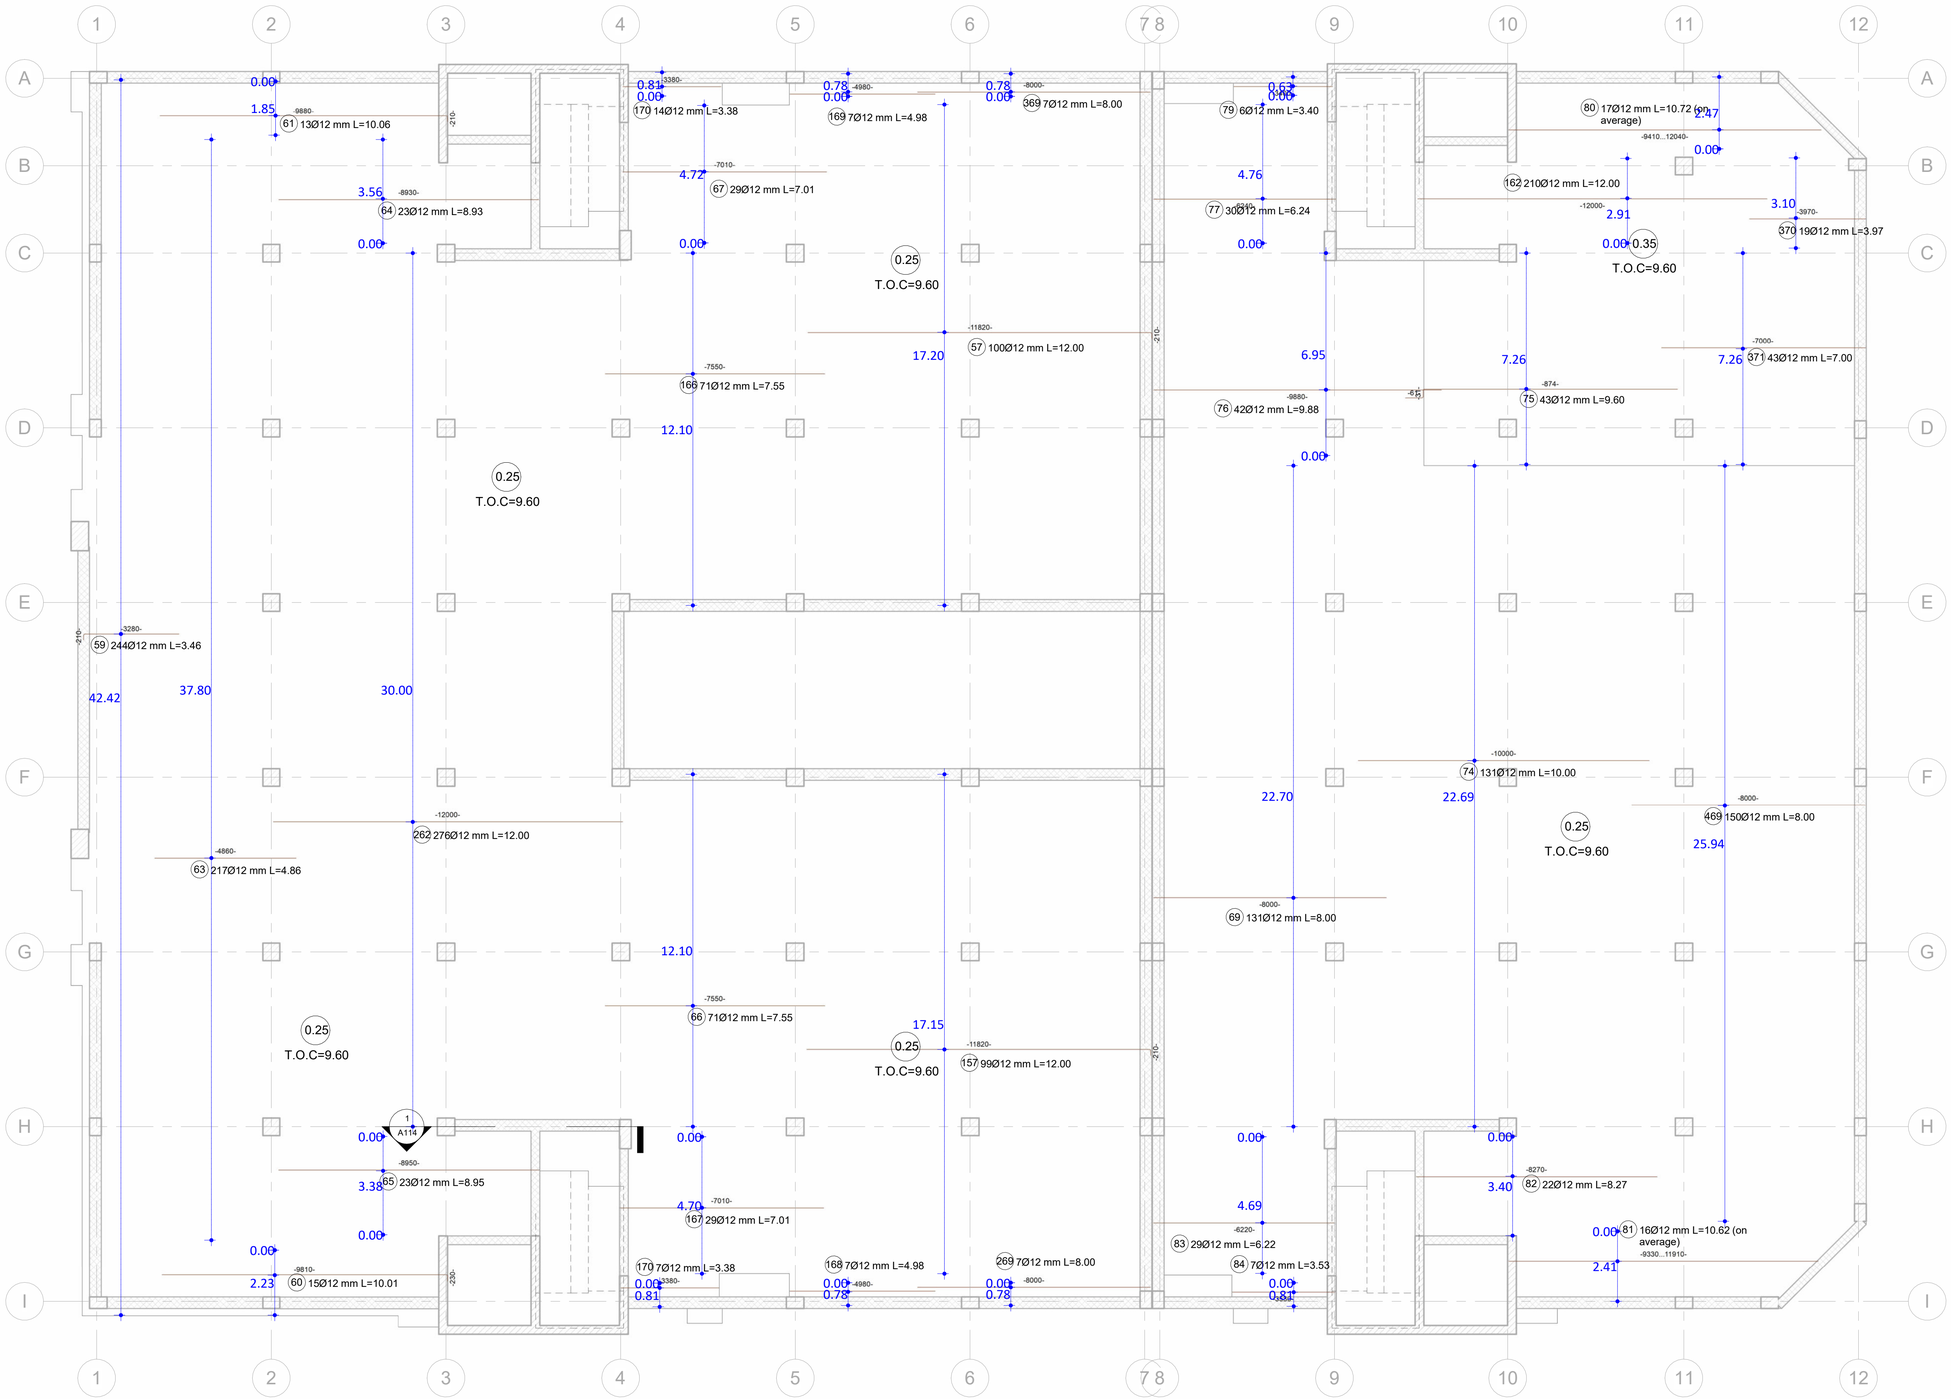

1 First Floor for Admin BUILDING-RFT-MESH BOT-X

1 : 100

CONSULTANT

CONTRACTOR

NOTES

KEY PLAN

REVISION SCHEDULE

REV	Date	ISSUED FOR	Issued by	Issued to
R00	19/1/2026	ISSUED FOR CONSTRUCTION		

DISCIPLINE

SHEET TILLE

First Floor for Admin BUILDING-RFT-MESH BOT-X

DRW BY :

Khalid Atef

CHK BY :


Checker

SCALE

1 : 100

REVISION

R00

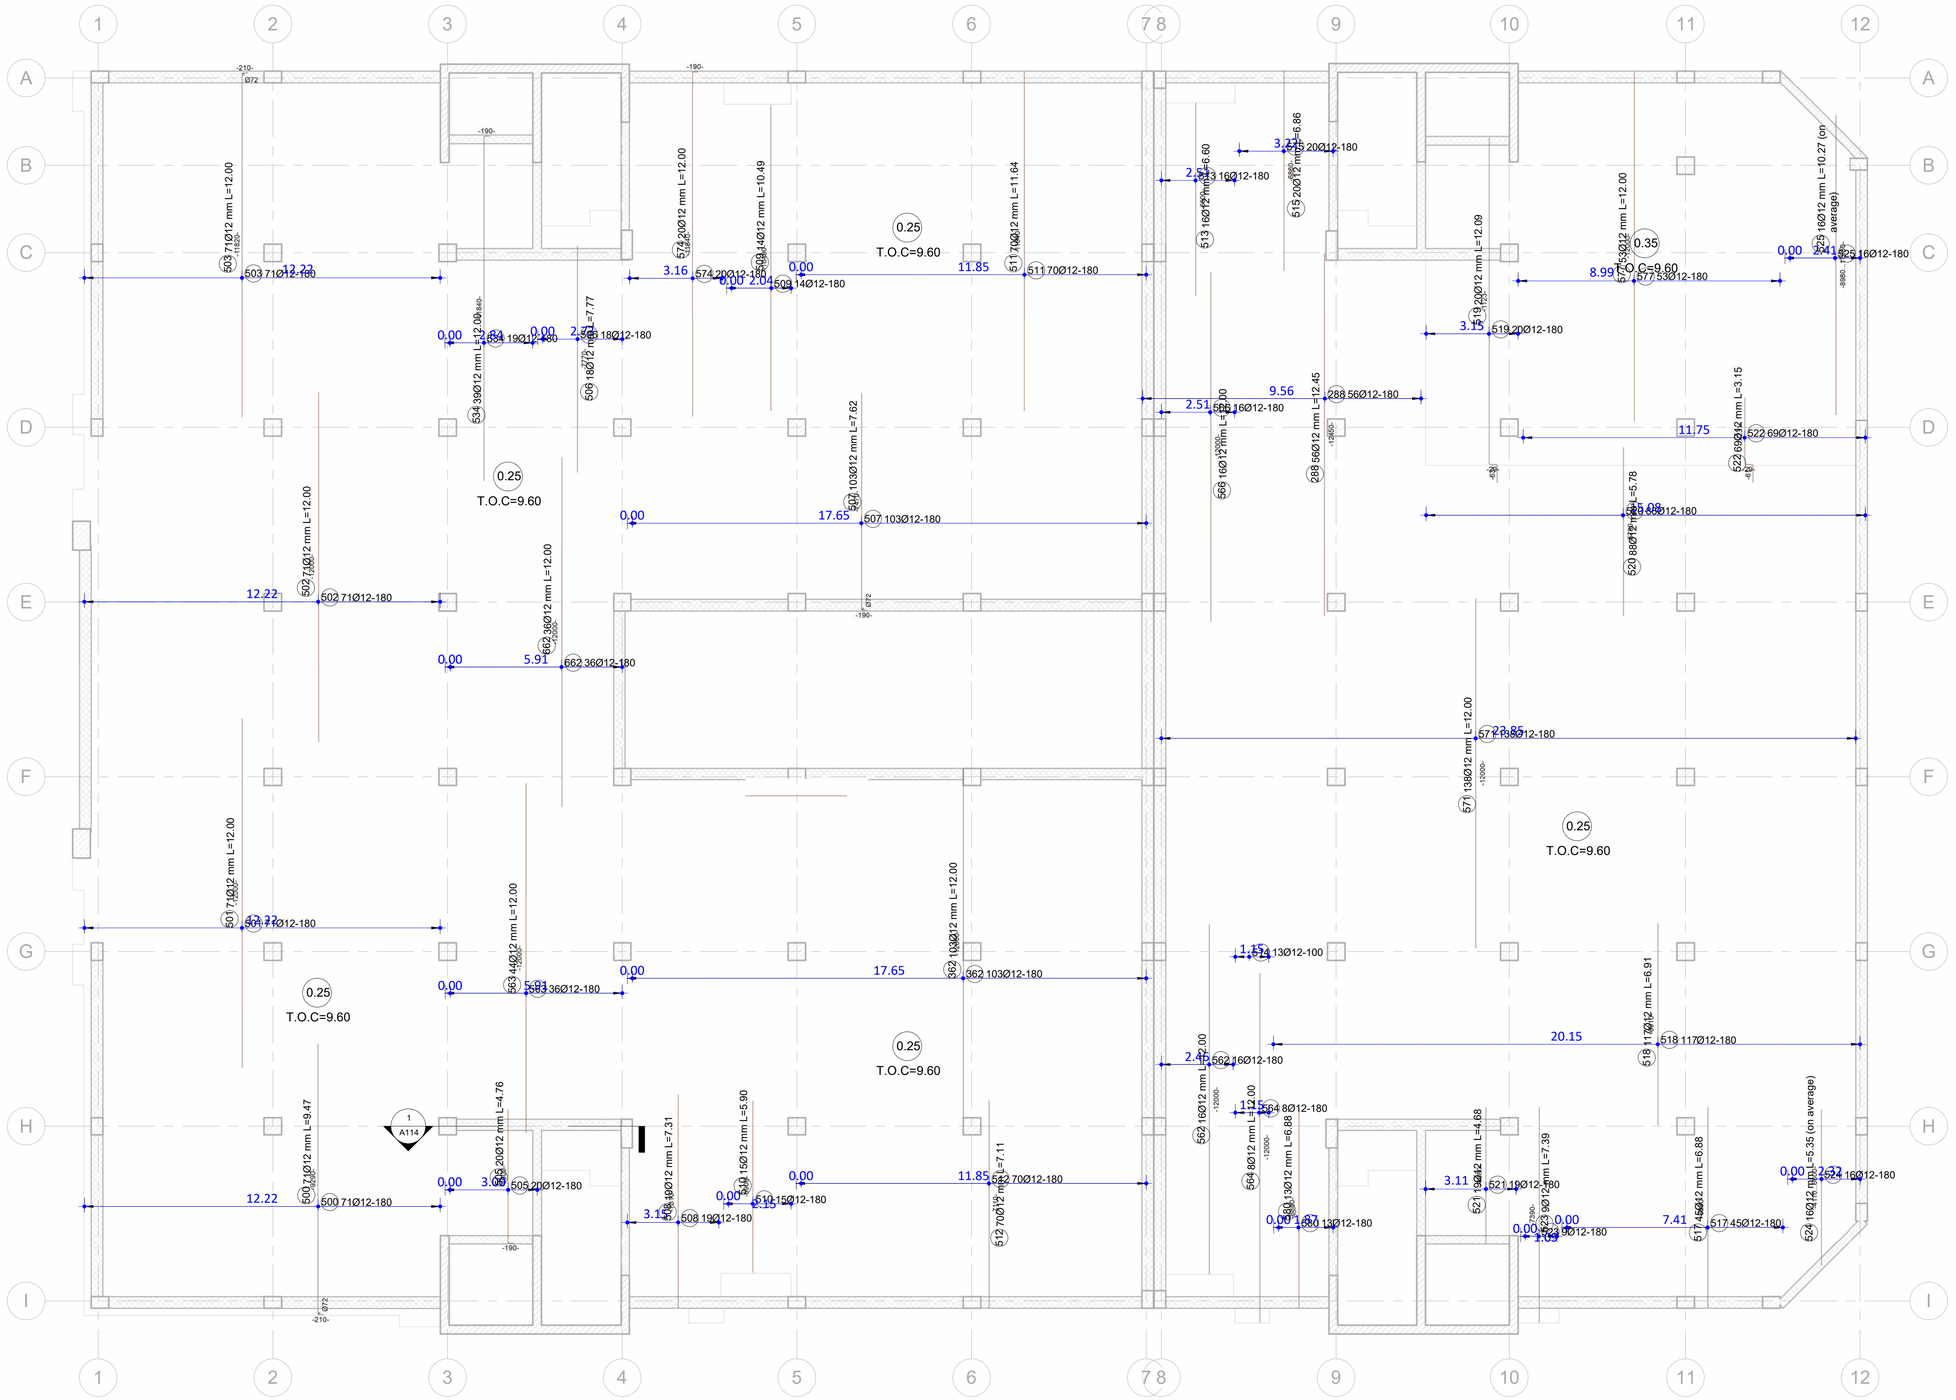

1 First Floor for Admin BUILDING-RFT-MESH BOT-Y

1 : 100

CONSULTANT

CONTRACTOR

NOTES

KEY PLAN

REVISION SCHEDULE

REV	Date	ISSUED FOR	Issued by	Issued to
R00	19/1/2026	ISSUED FOR CONSTRUCTION		

DISCIPLINE

SHEET TILLE

First Floor for Admin BUILDING-RFT-MESH BOT-Y

DRW BY :

Khalid Atef

CHK BY :


Checker

SCALE

1 : 100


REVISION

R00

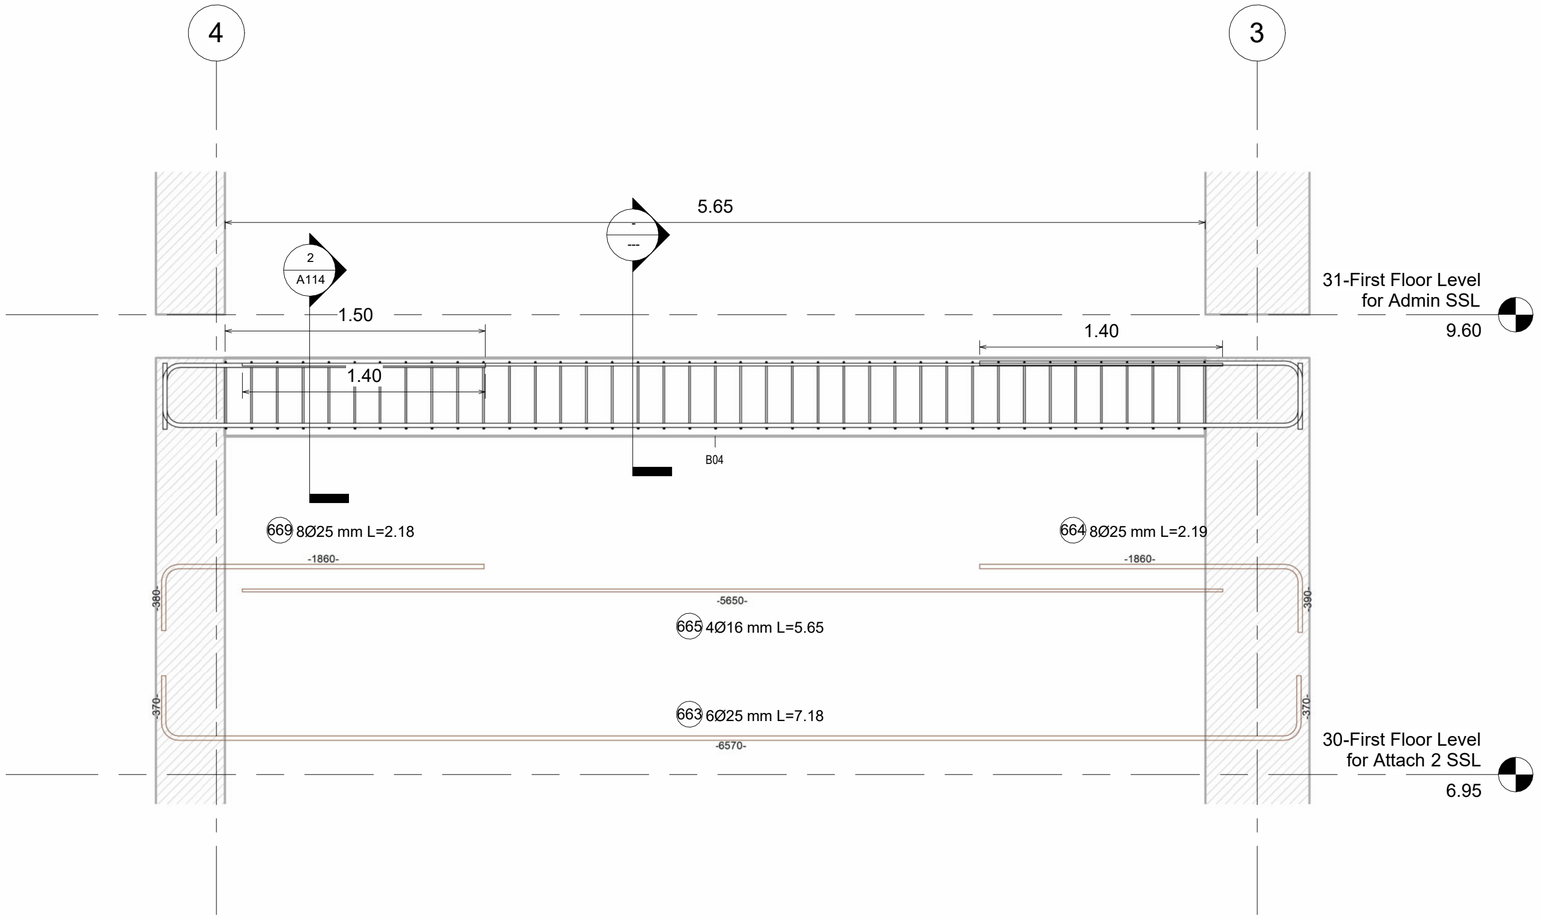

1 B04-RFT DETAIL

1 : 25

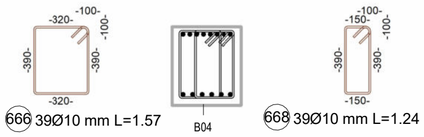

2 B04-RFT DETAIL-CROSS SEC

1 : 25

No.	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/2026

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE

B04-RFT DETAIL

CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	Issue Date

SCALE (@A2)	PROJECT NUMBER
1 : 25	KH 102

DRAWING NUMBER	REV
A114	R00

11/11/2026 01:02:40 م

Floors Schedule		
Level	Volume	Core Thickness
02-S.O.G Level For Admain	385.07 m³	0.15
05-Road Level	593.05 m³	0.15
06-S.O.G Level For Attach 2	26.89 m³	0.30
10-Basement Floor Level-ADMIN BULDING	506.68 m³	0.20
10-Basement Floor Level-ADMIN BULDING	2.65 m³	0.40
20-Ground Floor Level for Attach 1 SSL	8.25 m³	0.16
21-Ground Floor Level for Attach 2 SSL	24.39 m³	0.30
22-Ground Floor Level for Admin SSL	529.05 m³	0.25
22-Ground Floor Level for Admin SSL	63.75 m³	0.35
30-First Floor Level for Attach 2 SSL	26.42 m³	0.30
31-First Floor Level for Admin SSL	555.47 m³	0.25
31-First Floor Level for Admin SSL	67.54 m³	0.35
40-Second Floor for Admin SSL	557.78 m³	0.25
40-Second Floor for Admin SSL	64.39 m³	0.35
41-Top Level Of IPE Steel Coulmn	71.12 m³	<varies>
50-Third Floor Level for Admin SSL	557.78 m³	0.25
50-Third Floor Level for Admin SSL	64.27 m³	0.35
60-Fourth Floor Level for Admin SSL	551.32 m³	0.25
60-Fourth Floor Level for Admin SSL	63.89 m³	0.35
70-Fifth Floor Level for Admin SSL	551.23 m³	0.25
70-Fifth Floor Level for Admin SSL	63.95 m³	0.35
80-Sixth Floor Level for Admin SSL	551.23 m³	0.25
80-Sixth Floor Level for Admin SSL	63.86 m³	0.35
90-Roof Floor Level for Admin SSL	560.37 m³	0.25
90-Roof Floor Level for Admin SSL	63.86 m³	0.35
100-Upper Roof Floor Level for Admin SSL	38.86 m³	0.16
Grand total	6613.13 m³	

Structural Columns Schedule			
Base Level	Type	Count	Volume
01-Foundation Level Un H F	C1 600 x 600mm	179	160.15 m³
01-Foundation Level Un H F	C2 400 x 1000mm	17	18.40 m³
01-Foundation Level Un H F	C3 400 x 600mm	159	90.53 m³
01-Foundation Level Un H F	C4 600 x 1000mm	9	17.58 m³
03-Foundation Level Steel frame	C5 650 x 650mm	22	13.94 m³
04-CF1&CF2 Level	250 x 500mm	80	34.98 m³
04-CF1&CF2 Level	C6 400 x 400mm	6	3.22 m³
04-CF1&CF2 Level	C7 300 x 500mm	8	5.39 m³
04-CF1&CF2 Level	C8 300 x 600mm	2	1.64 m³
21-Ground Floor Level for Attach 2 SSL	C7 300 x 500mm	8	3.96 m³
21-Ground Floor Level for Attach 2 SSL	C8 300 x 600mm	2	1.19 m³
22-Ground Floor Level for Admin SSL	C1 600 x 600mm	44	57.56 m³
22-Ground Floor Level for Admin SSL	C2 400 x 1000mm	4	5.84 m³
22-Ground Floor Level for Admin SSL	C3 400 x 600mm	40	34.13 m³
22-Ground Floor Level for Admin SSL	C4 600 x 1000mm	2	4.38 m³
31-First Floor Level for Admin SSL	C1 600 x 600mm	44	56.09 m³
31-First Floor Level for Admin SSL	C2 400 x 1000mm	4	5.68 m³
31-First Floor Level for Admin SSL	C3 400 x 600mm	39	33.23 m³
31-First Floor Level for Admin SSL	C4 600 x 1000mm	1	2.13 m³
40-Second Floor for Admin SSL	C1 600 x 600mm	44	56.23 m³
40-Second Floor for Admin SSL	C2 400 x 1000mm	4	5.68 m³
40-Second Floor for Admin SSL	C3 400 x 600mm	39	33.23 m³
40-Second Floor for Admin SSL	C4 600 x 1000mm	1	2.13 m³
50-Third Floor Level for Admin SSL	C1 600 x 600mm	44	60.16 m³
50-Third Floor Level for Admin SSL	C2 400 x 1000mm	4	6.08 m³
50-Third Floor Level for Admin SSL	C3 400 x 600mm	39	35.57 m³
50-Third Floor Level for Admin SSL	C4 600 x 1000mm	1	2.28 m³
60-Fourth Floor Level for Admin SSL	C1 600 x 600mm	44	60.07 m³
60-Fourth Floor Level for Admin SSL	C2 400 x 1000mm	4	6.08 m³
60-Fourth Floor Level for Admin SSL	C3 400 x 600mm	38	34.66 m³
60-Fourth Floor Level for Admin SSL	C4 600 x 1000mm	2	4.56 m³
70-Fifth Floor Level for Admin SSL	C1 600 x 600mm	44	60.19 m³
70-Fifth Floor Level for Admin SSL	C2 400 x 1000mm	4	6.08 m³
70-Fifth Floor Level for Admin SSL	C3 400 x 600mm	38	34.66 m³
70-Fifth Floor Level for Admin SSL	C4 600 x 1000mm	2	4.56 m³
80-Sixth Floor Level for Admin SSL	C1 600 x 600mm	44	60.19 m³
80-Sixth Floor Level for Admin SSL	C2 400 x 1000mm	4	6.08 m³
80-Sixth Floor Level for Admin SSL	C3 400 x 600mm	38	34.66 m³
80-Sixth Floor Level for Admin SSL	C4 600 x 1000mm	2	4.56 m³
90-Roof Floor Level for Admin SSL	C1 600 x 600mm	8	9.39 m³
90-Roof Floor Level for Admin SSL	C2 400 x 1000mm	3	3.96 m³
Grand total			1081.06 m³

Structural Foundation Schedule		
Type	Count	Volume
CF1 300mm Foundation Slab	1	11.64 m³
CF2 300mm Foundation Slab	1	3.47 m³
F1 1000 x 1500 x 500mm	38	28.50 m³
F1 3400 x 3400 x 800mm	44	406.91 m³
F1* 1000 x 1500 x 500mm	4	3.00 m³
F2 1000 x 1800 x 500mm	19	17.10 m³
F2 3450 x 3550 x 800mm	2	19.60 m³
F3 3150 x 3450 x 800mm	2	17.39 m³
F4 2300 x 2500 x 800mm	23	104.04 m³
F5 3100 x 3300 x 800mm	8	65.47 m³
F6 2500 x 2600 x 800mm	2	10.40 m³
F7 8300 x 4550 x 800mm	2	60.42 m³
F7 8300 x 5000 x 800mm	2	66.40 m³
F8 2500 x 2500 x 900mm	8	45.00 m³
F9 4200 x 4200 x 900mm	4	63.49 m³
F10 4200 x 5700 x 900mm	10	214.92 m³
F 1400 x 1400 x 600mm	6	7.06 m³
P.C F1 1300 x 2100 x 200 mm	39	21.29 m³
P.C F1 4200 x 4200 x 400mm	88	310.31 m³
P.C F1* 1300 x 1800 x 200 mm	4	1.87 m³
P.C F2 1300 x 2400 x 200 mm	18	11.23 m³
P.C F2 4250 x 4350 x 400mm	4	14.79 m³
P.C F3 3950 x 4250 x 400mm	4	13.43 m³
P.C F4 3100 x 3300 x 400mm	46	93.64 m³
P.C F5 3900 x 4100 x 400mm	16	51.17 m³
P.C F6 3050 x 3400 x 400mm	4	5.39 m³
P.C F7 9100 x 5350 x 400mm	2	38.95 m³

Structural Foundation Schedule		
Type	Count	Volume
P.C F7 9100 x 5850 x 400mm	3	42.59 m³
P.C F8 2700 x 2700 x 100mm	8	5.83 m³
P.C F9 4400 x 4400 x 100mm	4	7.74 m³
P.C F10 4400 x 5900 x 100mm	10	25.96 m³
P.C F 2200 x 2200 x 400mm	11	11.62 m³
P.C Strip Footing Connection 1	1	2.80 m³
P.C Strip Footing Connection 1	1	1.66 m³
P.C Strip Footing Connection 1	1	2.80 m³
P.C Strip Footing Connection 2	1	2.80 m³
P.C Strip Footing Connection 2	1	2.80 m³
P.C Strip Footing Connection 3	1	2.80 m³
P.C Strip Footing Connection 3	1	2.80 m³
P.C Strip Footing Connection 4	1	2.66 m³
P.C Strip Footing Connection 4	1	2.66 m³
PC CF1 100mm Foundation Slab	1	6.20 m³
R.C Strip Footing Connection 1	1	10.60 m³
R.C Strip Footing Connection 1	1	5.60 m³
R.C Strip Footing Connection 1	1	10.60 m³
R.C Strip Footing Connection 2	1	10.60 m³
R.C Strip Footing Connection 2	1	10.60 m³
R.C Strip Footing Connection 3	1	10.60 m³
R.C Strip Footing Connection 3	1	10.60 m³
R.C Strip Footing Connection 4	1	10.37 m³
R.C Strip Footing Connection 4	1	10.37 m³
R.W 400mm Foundation P.C Slab	2	106.59 m³
R.W 500mm Foundation R.C Slab	4	123.03 m³
Grand total		2150.19 m³

CONSULTANT

CONTRACTOR

NOTES

KEY PLAN

REVISION SCHEDULE

REV	Date	ISSUED FOR	Issued by	Issued to
R00	19/1/2026	ISSUED FOR CONSTRUCTION		

DISCIPLINE

SHEET TILLE

QS SHEETS (FLOORS & COULMNS & FOUNDATION)

DRW BY :

Khalid Atef

CHK BY :

Checker

SCALE

REVISION

R00

Stair Material Take off			
Base Level	Material: Volume	Top Level	Type
02-S.O.G Level For Admain	14.24 m³	10-Basement Floor Level-ADMIN BULDING	Stair 20cm
05-Road Level	12.30 m³	10-Basement Floor Level-ADMIN BULDING	Stair 20cm
06-S.O.G Level For Attach 2	2.37 m³	21-Ground Floor Level for Attach 2 SSL	Stair 300mm
10-Basement Floor Level-ADMIN BULDING	15.19 m³	22-Ground Floor Level for Admin SSL	Stair 20cm
22-Ground Floor Level for Admin SSL	14.06 m³	31-First Floor Level for Admin SSL	Stair 20cm
31-First Floor Level for Admin SSL	13.94 m³	40-Second Floor for Admin SSL	Stair 20cm
40-Second Floor for Admin SSL	14.03 m³	50-Third Floor Level for Admin SSL	Stair 20cm
50-Third Floor Level for Admin SSL	14.03 m³	60-Fourth Floor Level for Admin SSL	Stair 20cm
60-Fourth Floor Level for Admin SSL	14.07 m³	70-Fifth Floor Level for Admin SSL	Stair 20cm
70-Fifth Floor Level for Admin SSL	13.98 m³	80-Sixth Floor Level for Admin SSL	Stair 20cm
80-Sixth Floor Level for Admin SSL	13.94 m³	90-Roof Floor Level for Admin SSL	Stair 20cm
Grand total	142.14 m³		

Structural Framing Schedule			
Reference Level	Type	Count	Volume
70-Fifth Floor Level for Admin SSL	B07 400 x 700mm	17	15.97 m³
70-Fifth Floor Level for Admin SSL	B 250 x 700mm	14	6.64 m³

80-Sixth Floor Level for Admin SSL

80-Sixth Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
80-Sixth Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
80-Sixth Floor Level for Admin SSL	B03 400 x 700mm	2	2.00 m³
80-Sixth Floor Level for Admin SSL	B04 400 x 700mm	6	7.32 m³
80-Sixth Floor Level for Admin SSL	B05 400 x 700mm	5	3.95 m³
80-Sixth Floor Level for Admin SSL	B06 400 x 700mm	18	17.75 m³
80-Sixth Floor Level for Admin SSL	B07 400 x 700mm	17	15.97 m³
80-Sixth Floor Level for Admin SSL	B 250 x 700mm	14	6.64 m³

90-Roof Floor Level for Admin SSL

90-Roof Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
90-Roof Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
90-Roof Floor Level for Admin SSL	B03 400 x 700mm	2	2.00 m³
90-Roof Floor Level for Admin SSL	B04 400 x 700mm	6	7.22 m³
90-Roof Floor Level for Admin SSL	B05 400 x 700mm	5	3.95 m³
90-Roof Floor Level for Admin SSL	B06 400 x 700mm	18	17.75 m³
90-Roof Floor Level for Admin SSL	B07 400 x 700mm	17	15.97 m³
90-Roof Floor Level for Admin SSL	B 250 x 700mm	14	6.64 m³

100-Upper Roof Floor Level for Admin SSL

100-Upper Roof Floor Level for Admin SSL	B01 250 x 700mm	12	5.66 m³
100-Upper Roof Floor Level for Admin SSL	B04 400 x 700mm	4	4.99 m³
100-Upper Roof Floor Level for Admin SSL	B* 250 x 700mm	6	5.31 m³
1017			873.33 m³

Structural Framing Schedule			
Reference Level	Type	Count	Volume

01-Foundation Level Un H F

01-Foundation Level Un H F	GB1 400 x 800mm	131	118.76 m³
01-Foundation Level Un H F	GB2 250 x 800mm	4	4.47 m³

03-Foundation Level Steel frame

03-Foundation Level Steel frame	GB1 400 x 800mm	22	16.79 m³

04-CF1&CF2 Level

04-CF1&CF2 Level	GB1 400 x 800mm	7	8.22 m³
04-CF1&CF2 Level	Smell Fence 250 x 800mm	63	53.13 m³

10-Basement Floor Level-ADMIN BULDING

10-Basement Floor Level-ADMIN BULDING	B01 400 x 700mm	23	24.59 m³
10-Basement Floor Level-ADMIN BULDING	B02 400 x 700mm	73	78.87 m³
10-Basement Floor Level-ADMIN BULDING	B03 400 x 700mm	21	21.57 m³
10-Basement Floor Level-ADMIN BULDING	B04 400 x 700mm	10	12.21 m³
10-Basement Floor Level-ADMIN BULDING	B 250 x 700mm	20	9.43 m³

23-Top Level Of The Fence

23-Top Level Of The Fence	Beam Fence 250 x 400mm	56	27.61 m³

20-Ground Floor Level for Attach 1 SSL

20-Ground Floor Level for Attach 1 SSL	B05 400 x 700mm	3	2.88 m³
20-Ground Floor Level for Attach 1 SSL	B06 400 x 700mm	3	2.85 m³

21-Ground Floor Level for Attach 2 SSL

21-Ground Floor Level for Attach 2 SSL	B 250 x 700mm	6	4.07 m³
21-Ground Floor Level for Attach 2 SSL	B* 250 x 700mm	6	1.65 m³

22-Ground Floor Level for Admin SSL

22-Ground Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
22-Ground Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
22-Ground Floor Level for Admin SSL	B04 400 x 700mm	9	9.83 m³

Structural Framing Schedule			
Reference Level	Type	Count	Volume
22-Ground Floor Level for Admin SSL	B05 400 x 700mm	8	6.92 m³
22-Ground Floor Level for Admin SSL	B06 400 x 700mm	18	17.74 m³
22-Ground Floor Level for Admin SSL	B07 400 x 700mm	18	16.94 m³
22-Ground Floor Level for Admin SSL	B 250 x 700mm	16	7.78 m³

30-First Floor Level for Attach 2 SSL

30-First Floor Level for Attach 2 SSL	B 250 x 700mm	6	4.07 m³
30-First Floor Level for Attach 2 SSL	B* 250 x 700mm	6	1.65 m³

31-First Floor Level for Admin SSL

31-First Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
31-First Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
31-First Floor Level for Admin SSL	B03 400 x 700mm	2	2.00 m³
31-First Floor Level for Admin SSL	B04 400 x 700mm	6	6.88 m³
31-First Floor Level for Admin SSL	B05 400 x 700mm	5	3.86 m³
31-First Floor Level for Admin SSL	B06 400 x 700mm	18	17.50 m³
31-First Floor Level for Admin SSL	B07 400 x 700mm	17	15.93 m³
31-First Floor Level for Admin SSL	B 250 x 700mm	14	6.52 m³

40-Second Floor for Admin SSL

40-Second Floor for Admin SSL	B01 400 x 700mm	2	1.94 m³
40-Second Floor for Admin SSL	B02 400 x 700mm	2	1.94 m³
40-Second Floor for Admin SSL	B03 400 x 700mm	2	2.00 m³
40-Second Floor for Admin SSL	B04 400 x 700mm	6	7.24 m³
40-Second Floor for Admin SSL	B05 400 x 700mm	5	3.95 m³
40-Second Floor for Admin SSL	B06 400 x 700mm	18	17.72 m³
40-Second Floor for Admin SSL	B07 400 x 700mm	17	15.97 m³
40-Second Floor for Admin SSL	B 250 x 700mm	14	6.65 m³

Structural Framing Schedule			
Reference Level	Type	Count	Volume

50-Third Floor Level for Admin SSL

50-Third Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
50-Third Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
50-Third Floor Level for Admin SSL	B03 400 x 700mm	2	2.00 m³
50-Third Floor Level for Admin SSL	B04 400 x 700mm	6	7.34 m³
50-Third Floor Level for Admin SSL	B05 400 x 700mm	5	3.94 m³
50-Third Floor Level for Admin SSL	B06 400 x 700mm	18	17.71 m³
50-Third Floor Level for Admin SSL	B07 400 x 700mm	17	15.97 m³
50-Third Floor Level for Admin SSL	B 250 x 700mm	14	6.64 m³

60-Fourth Floor Level for Admin SSL

60-Fourth Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
60-Fourth Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
60-Fourth Floor Level for Admin SSL	B03 400 x 700mm	2	2.00 m³
60-Fourth Floor Level for Admin SSL	B04 400 x 700mm	6	7.35 m³
60-Fourth Floor Level for Admin SSL	B05 400 x 700mm	5	3.95 m³
60-Fourth Floor Level for Admin SSL	B06 400 x 700mm	18	17.72 m³
60-Fourth Floor Level for Admin SSL	B07 400 x 700mm	17	15.97 m³
60-Fourth Floor Level for Admin SSL	B 250 x 700mm	14	6.64 m³

70-Fifth Floor Level for Admin SSL

70-Fifth Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
70-Fifth Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
70-Fifth Floor Level for Admin SSL	B03 400 x 700mm	2	2.00 m³
70-Fifth Floor Level for Admin SSL	B04 400 x 700mm	6	7.32 m³
70-Fifth Floor Level for Admin SSL	B05 400 x 700mm	5	3.95 m³
70-Fifth Floor Level for Admin SSL	B06 400 x 700mm	18	17.75 m³

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/2026

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE

QS SHEETS (FRAMING & STAIR MATERIAL TAKE OFF)

CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	01/07/26

SCALE (@ A1)	PROJECT NUMBER
	KH 102

DRAWING NUMBER	REV
A116	R00

11/11/2026 01:03:04

01-FOUNDATION -BBS Schedule (F1)

S_PARTION	Bar Diameter	Bar Length	Total Bar Length	Quantity	METRIC WEIGHT	WEIGHT
FOUNDATION	16 mm	2990 mm	26910 mm	1	1.580247	0.042524
FOUNDATION	16 mm	3000 mm	33000 mm	1	1.580247	0.052148
FOUNDATION	18 mm	4650 mm	4650 mm	1	2	0.0093
FOUNDATION	8 mm	1500 mm	16500 mm	11	0.395062	0.006519
FOUNDATION	8 mm	1530 mm	27540 mm	18	0.395062	0.01088
FOUNDATION	8 mm	2350 mm	42300 mm	18	0.395062	0.016711
FOUNDATION	18 mm	4630 mm	162050 mm	35	2	0.3241
FOUNDATION	18 mm	4670 mm	163450 mm	35	2	0.3269
			476400 mm			0.789082

03-COULMNS-BBS Schedule(C1)

S_PARTION	Bar Diameter	Bar Length	Total Bar Length	Quantity	NO.OF ELEMENT	METRIC WEIGHT	WEIGHT
COULMNS	16 mm	4000 mm	240000 mm	1	43	1.580247	16.308148
COULMNS	16 mm	6000 mm	480000 mm	1	43	1.580247	32.616296
COULMNS	16 mm	6970 mm	55760 mm	1	43	1.580247	3.788926
COULMNS	16 mm	6980 mm	83760 mm	1	43	1.580247	5.691544
COULMNS	8 mm	1480 mm	48840 mm	33	43	0.395062	0.829677
COULMNS	8 mm	1520 mm	50160 mm	33	43	0.395062	0.852101
COULMNS	8 mm	2350 mm	77550 mm	33	43	0.395062	1.317393
COULMNS	8 mm	1420 mm	51120 mm	36	43	0.395062	0.868409
COULMNS	8 mm	1440 mm	155520 mm	36	43	0.395062	2.64192
COULMNS	8 mm	1450 mm	52200 mm	36	43	0.395062	0.886756
COULMNS	8 mm	1480 mm	106560 mm	36	43	0.395062	1.810204
COULMNS	8 mm	1490 mm	53640 mm	36	43	0.395062	0.911218
COULMNS	8 mm	1500 mm	108000 mm	36	43	0.395062	1.834667
COULMNS	8 mm	2230 mm	401400 mm	36	43	0.395062	6.818844
COULMNS	8 mm	1440 mm	53280 mm	37	43	0.395062	0.905102
COULMNS	8 mm	1500 mm	55500 mm	37	43	0.395062	0.942815
COULMNS	8 mm	2230 mm	82510 mm	37	43	0.395062	1.401651
COULMNS	8 mm	1460 mm	55480 mm	38	43	0.395062	0.942475
COULMNS	8 mm	1500 mm	57000 mm	38	43	0.395062	0.968296
COULMNS	8 mm	2230 mm	84740 mm	38	43	0.395062	1.439534
COULMNS	8 mm	1500 mm	70500 mm	47	43	0.395062	1.19763
COULMNS	8 mm	1540 mm	72380 mm	47	43	0.395062	1.229566
COULMNS	8 mm	2350 mm	110450 mm	47	43	0.395062	1.876286
			2606350 mm				88.079459

02-BEAMS-BBS Schedule (B04)

S_PARTION	Bar Diameter	Bar Length	Total Bar Length	Quantity	METRIC WEIGHT	WEIGHT
BEAMS	16 mm	5650 mm	22600 mm	2	1.580247	0.035714
BEAMS	25 mm	7180 mm	43080 mm	6	3.858025	0.166204
BEAMS	25 mm	2180 mm	34880 mm	8	3.858025	0.134568
BEAMS	25 mm	2190 mm	17520 mm	8	3.858025	0.067593
BEAMS	10 mm	1240 mm	48360 mm	39	0.617284	0.029852
BEAMS	10 mm	1570 mm	61230 mm	39	0.617284	0.037796
			227670 mm			0.471726

04-FIRST FLOOR MESH-BOT-X BBS Schedule

S_PARTION	Bar Diameter	Bar Length	Total Bar Length	Quantity	METRIC WEIGHT	WEIGHT
MESH-BOT-X	12 mm	9330 mm	9329 mm	1	0.888889	0.008293
MESH-BOT-X	12 mm	9410 mm	9406 mm	1	0.888889	0.008361
MESH-BOT-X	12 mm	9500 mm	9501 mm	1	0.888889	0.008445
MESH-BOT-X	12 mm	9570 mm	9571 mm	1	0.888889	0.008507
MESH-BOT-X	12 mm	9670 mm	9673 mm	1	0.888889	0.008598
MESH-BOT-X	12 mm	9740 mm	9735 mm	1	0.888889	0.008654
MESH-BOT-X	12 mm	9840 mm	9845 mm	1	0.888889	0.008751
MESH-BOT-X	12 mm	9900 mm	9900 mm	1	0.888889	0.0088
MESH-BOT-X	12 mm	10020 mm	10017 mm	1	0.888889	0.008904
MESH-BOT-X	12 mm	10060 mm	10065 mm	1	0.888889	0.008946
MESH-BOT-X	12 mm	10190 mm	10189 mm	1	0.888889	0.009057
MESH-BOT-X	12 mm	10230 mm	10229 mm	1	0.888889	0.009093
MESH-BOT-X	12 mm	10360 mm	10361 mm	1	0.888889	0.009209
MESH-BOT-X	12 mm	10390 mm	10394 mm	1	0.888889	0.009239
MESH-BOT-X	12 mm	10530 mm	10532 mm	1	0.888889	0.009362
MESH-BOT-X	12 mm	10560 mm	10559 mm	1	0.888889	0.009386
MESH-BOT-X	12 mm	10700 mm	10704 mm	1	0.888889	0.009515
MESH-BOT-X	12 mm	10720 mm	10723 mm	1	0.888889	0.009532
MESH-BOT-X	12 mm	10880 mm	10876 mm	1	0.888889	0.009668
MESH-BOT-X	12 mm	10890 mm	10888 mm	1	0.888889	0.009678
MESH-BOT-X	12 mm	11050 mm	22101 mm	1	0.888889	0.019645
MESH-BOT-X	12 mm	11220 mm	22438 mm	1	0.888889	0.019944
MESH-BOT-X	12 mm	11380 mm	11382 mm	1	0.888889	0.010118
MESH-BOT-X	12 mm	11390 mm	11392 mm	1	0.888889	0.010126
MESH-BOT-X	12 mm	11550 mm	11547 mm	1	0.888889	0.010264
MESH-BOT-X	12 mm	11560 mm	11564 mm	1	0.888889	0.010279
MESH-BOT-X	12 mm	11710 mm	11712 mm	1	0.888889	0.01041
MESH-BOT-X	12 mm	11740 mm	11736 mm	1	0.888889	0.010432
MESH-BOT-X	12 mm	11880 mm	11876 mm	1	0.888889	0.010557
MESH-BOT-X	12 mm	11910 mm	11907 mm	1	0.888889	0.010584
MESH-BOT-X	12 mm	12040 mm	12041 mm	1	0.888889	0.010703
MESH-BOT-X	12 mm	3400 mm	20400 mm	6	0.888889	0.018133
MESH-BOT-X	12 mm	3380 mm	47320 mm	7	0.888889	0.042062
MESH-BOT-X	12 mm	3530 mm	24710 mm	7	0.888889	0.021964
MESH-BOT-X	12 mm	4980 mm	69720 mm	7	0.888889	0.061973
MESH-BOT-X	12 mm	8000 mm	112000 mm	7	0.888889	0.099556
MESH-BOT-X	12 mm	10060 mm	130780 mm	13	0.888889	0.116249
MESH-BOT-X	12 mm	10010 mm	150150 mm	15	0.888889	0.133467
MESH-BOT-X	12 mm	3970 mm	75430 mm	19	0.888889	0.067049
MESH-BOT-X	12 mm	12000 mm	228000 mm	19	0.888889	0.202667
MESH-BOT-X	12 mm	8270 mm	181940 mm	22	0.888889	0.161724
MESH-BOT-X	12 mm	8930 mm	205390 mm	23	0.888889	0.182569
MESH-BOT-X	12 mm	8950 mm	205850 mm	23	0.888889	0.182978
MESH-BOT-X	12 mm	6220 mm	180380 mm	29	0.888889	0.160338
MESH-BOT-X	12 mm	7010 mm	406580 mm	29	0.888889	0.361404
MESH-BOT-X	12 mm	6240 mm	187200 mm	30	0.888889	0.1664
MESH-BOT-X	12 mm	9880 mm	414960 mm	42	0.888889	0.368853
MESH-BOT-X	12 mm	7000 mm	301000 mm	43	0.888889	0.267556
MESH-BOT-X	12 mm	9600 mm	412800 mm	43	0.888889	0.366933
MESH-BOT-X	12 mm	7550 mm	1072100 mm	71	0.888889	0.952978
MESH-BOT-X	12 mm	12000 mm	1188000 mm	99	0.888889	1.056
MESH-BOT-X	12 mm	12000 mm	1200000 mm	100	0.888889	1.066667
MESH-BOT-X	12 mm	8000 mm	1048000 mm	131	0.888889	0.931556
MESH-BOT-X	12 mm	10000 mm	1310000 mm	131	0.888889	1.164444
MESH-BOT-X	12 mm	8000 mm	1200000 mm	150	0.888889	1.066667
MESH-BOT-X	12 mm	12000 mm	2076000 mm	173	0.888889	1.845333
MESH-BOT-X	12 mm	4860 mm	1054620 mm	217	0.888889	0.93744
MESH-BOT-X	12 mm	3460 mm	844240 mm	244	0.888889	0.750436
			14699763 mm			13.066456

05-FIRST FLOOR MESH-BOT-Y BBS Schedule

S_PARTION	Bar Diameter	Bar Length	Total Bar Length	Quantity	METRIC WEIGHT	WEIGHT
MESH-BOT-Y	12 mm	4110 mm	4110 mm	1	0.888889	0.003653
MESH-BOT-Y	12 mm	4280 mm	4276 mm	1	0.888889	0.003801
MESH-BOT-Y	12 mm	4440 mm	4442 mm	1	0.888889	0.003948
MESH-BOT-Y	12 mm	4610 mm	4607 mm	1	0.888889	0.004095
MESH-BOT-Y	12 mm	4770 mm	4773 mm	1	0.888889	0.004243
MESH-BOT-Y	12 mm	4940 mm	4939 mm	1	0.888889	0.00439
MESH-BOT-Y	12 mm	5100 mm	5105 mm	1	0.888889	0.004538
MESH-BOT-Y	12 mm	5270 mm	5271 mm	1	0.888889	0.004685
MESH-BOT-Y	12 mm	5440 mm	5436 mm	1	0.888889	0.004832
MESH-BOT-Y	12 mm	5600 mm	5602 mm	1	0.888889	0.00498
MESH-BOT-Y	12 mm	5770 mm	5768 mm	1	0.888889	0.005127
MESH-BOT-Y	12 mm	5930 mm	5934 mm	1	0.888889	0.005274
MESH-BOT-Y	12 mm	6100 mm	6099 mm	1	0.888889	0.005422
MESH-BOT-Y	12 mm	6270 mm	6265 mm	1	0.888889	0.005569
MESH-BOT-Y	12 mm	6430 mm	6431 mm	1	0.888889	0.005716
MESH-BOT-Y	12 mm	6600 mm	6597 mm	1	0.888889	0.005864
MESH-BOT-Y	12 mm	8980 mm	8979 mm	1	0.888889	0.007981
MESH-BOT-Y	12 mm	9150 mm	9150 mm	1	0.888889	0.008134
MESH-BOT-Y	12 mm	9320 mm	9322 mm	1	0.888889	0.008287
MESH-BOT-Y	12 mm	9490 mm	9494 mm	1	0.888889	0.008439
MESH-BOT-Y	12 mm	9670 mm	9666 mm	1	0.888889	0.008592
MESH-BOT-Y	12 mm	9840 mm	9838 mm	1	0.888889	0.008745
MESH-BOT-Y	12 mm	10010 mm	10010 mm	1	0.888889	0.008898
MESH-BOT-Y	12 mm	10180 mm	10182 mm	1	0.888889	0.00905
MESH-BOT-Y	12 mm	10350 mm	10354 mm	1	0.888889	0.009203
MESH-BOT-Y	12 mm	10530 mm	10525 mm	1	0.888889	0.009356
MESH-BOT-Y	12 mm	10700 mm	10697 mm	1	0.888889	0.009509
MESH-BOT-Y	12 mm	10870 mm	10869 mm	1	0.888889	0.009662
MESH-BOT-Y	12 mm	11040 mm	11041 mm	1	0.888889	0.009814
MESH-BOT-Y	12 mm	11210 mm	11213 mm	1	0.888889	0.009967
MESH-BOT-Y	12 mm	11380 mm	11385 mm	1	0.888889	0.01012
MESH-BOT-Y	12 mm	11560 mm	11557 mm	1	0.888889	0.010273
MESH-BOT-Y	12 mm	12000 mm	96000 mm	8	0.888889	0.085333
MESH-BOT-Y	12 mm	7390 mm	66510 mm	9	0.888889	0.05912
MESH-BOT-Y	12 mm	2250 mm	29250 mm	13	0.888889	0.026
MESH-BOT-Y	12 mm	6880 mm	89440 mm	13	0.888889	0.079502
MESH-BOT-Y	12 mm	10490 mm	146860 mm	14	0.888889	0.130542
MESH-BOT-Y	12 mm	5900 mm	88500 mm	15	0.888889	0.078667
MESH-BOT-Y	12 mm	6600 mm	105600 mm	16	0.888889	0.093867
MESH-BOT-Y	12 mm	12000 mm	384000 mm	16	0.888889	0.341333
MESH-BOT-Y	12 mm	7770 mm	139860 mm	18	0.888889	0.12432
MESH-BOT-Y	12 mm	4680 mm	88920 mm	19	0.888889	0.07904
MESH-BOT-Y	12 mm	7310 mm	138890 mm	19	0.888889	0.123458
MESH-BOT-Y	12 mm	12000 mm	228000 mm	19	0.888889	0.202667
MESH-BOT-Y	12 mm	4760 mm	95200 mm	20	0.888889	0.084622
MESH-BOT-Y	12 mm	6860 mm	137200 mm	20	0.888889	0.121956
MESH-BOT-Y	12 mm	12000 mm	240000 mm	20	0.888889	0.213333
MESH-BOT-Y	12 mm	12090 mm	241800 mm	20	0.888889	0.214933
MESH-BOT-Y	12 mm	12000 mm	864000 mm	36	0.888889	0.768
MESH-BOT-Y	12 mm	6880 mm	309600 mm	45	0.888889	0.2752
MESH-BOT-Y	12 mm	12000 mm	636000 mm	53	0.888889	0.565333
MESH-BOT-Y	12 mm	12450 mm	697200 mm	56	0.888889	0.619733
MESH-BOT-Y	12 mm	3150 mm	217350 mm	69	0.888889	0.1932
MESH-BOT-Y	12 mm	7110 mm	497700 mm	70	0.888889	0.4424
MESH-BOT-Y	12 mm	11640 mm	814800 mm	70	0.888889	0.724267
MESH-BOT-Y	12 mm	9470 mm	672370 mm	71	0.888889	0.597662
MESH-BOT-Y	12 mm	12000 mm	2556000 mm	71	0.888889	2.272
MESH-BOT-Y	12 mm	5780 mm	508640 mm	88	0.888889	0.452124
MESH-BOT-Y	12 mm	7620 mm	784860 mm	103	0.888889	0.697653
MESH-BOT-Y	12 mm	12000 mm	1236000 mm	103	0.888889	1.098667
MESH-BOT-Y	12 mm	6910 mm	808470 mm	117	0.888889	0.71864
MESH-BOT-Y	12 mm	12000 mm	1656000 mm	138	0.888889	1.472
			14824957 mm			13.177739

CONSULTANT

CONTRACTOR

NOTES

KEY PLAN

REVISION SCHEDULE

REV	Date	ISSUED FOR	Issued by	Issued to
R00	19/1/2026	ISSUED FOR CONSTRUCTION		

DISCIPLINE

SHEET TILLE

QS-BBS-SHEETS

DRW BY :

Khalid Atef

CHK BY :

Checker

SCALE

REVISION

R00