
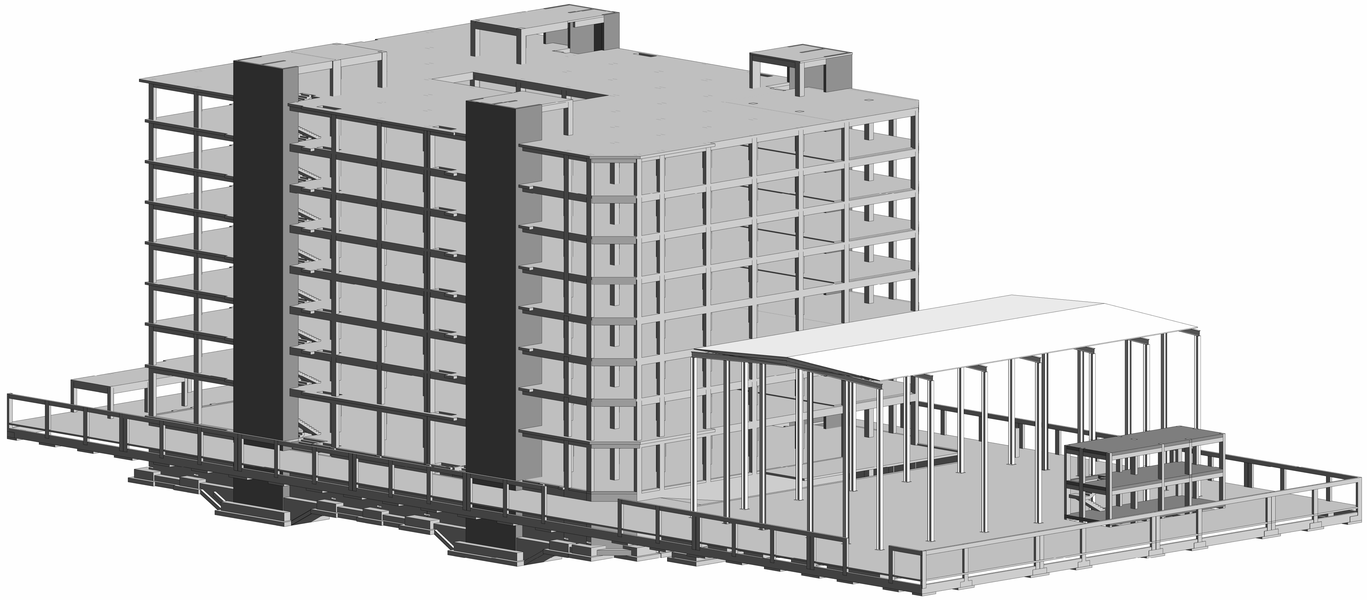



1 3D VIEW 1

Sheet List	
Sheet Name	Sheet Number
COVER SHEET	A100
RC FOUNDATION LAYOUT- ADMIN BUILDING	A101
RC FOUNDATION LAYOUT - STEEL BUILDING&OFFICE	A102
COLUMNS&AXIS LAYOUT PLAN-ADIMN BULDING	A103
COLUMNS&AXIS LAYOUT PLAN-STEEL BUILDING	A104
RC LAYOUT FOR BASEMENT FLOOR	A105
RC LAYOUT FOR FIRST FLOOR	A106
RC LAYOUT FOR TEYPICAL FLOOR	A107

Sheet List	
Sheet Name	Sheet Number
RC LAYOUT FOR ROOF FLOOR	A108
SECTIONS SHEETS	A109
DRAFTING VIEW SHEET PART 2	A110
QS SHEETS (FLOORS & COULMNS & FOUNDATION)	A111
QS SHEETS (FRAMING & STAIR MATERIAL TAKE OFF)	A112
Structural Foundation RFT SCHEDUAL	A116
BEAM REINFORCEMENT SCHEDULE FOR GROUND FLOOR	A117
DRAFTING VIEW SHEET PART 1	A118

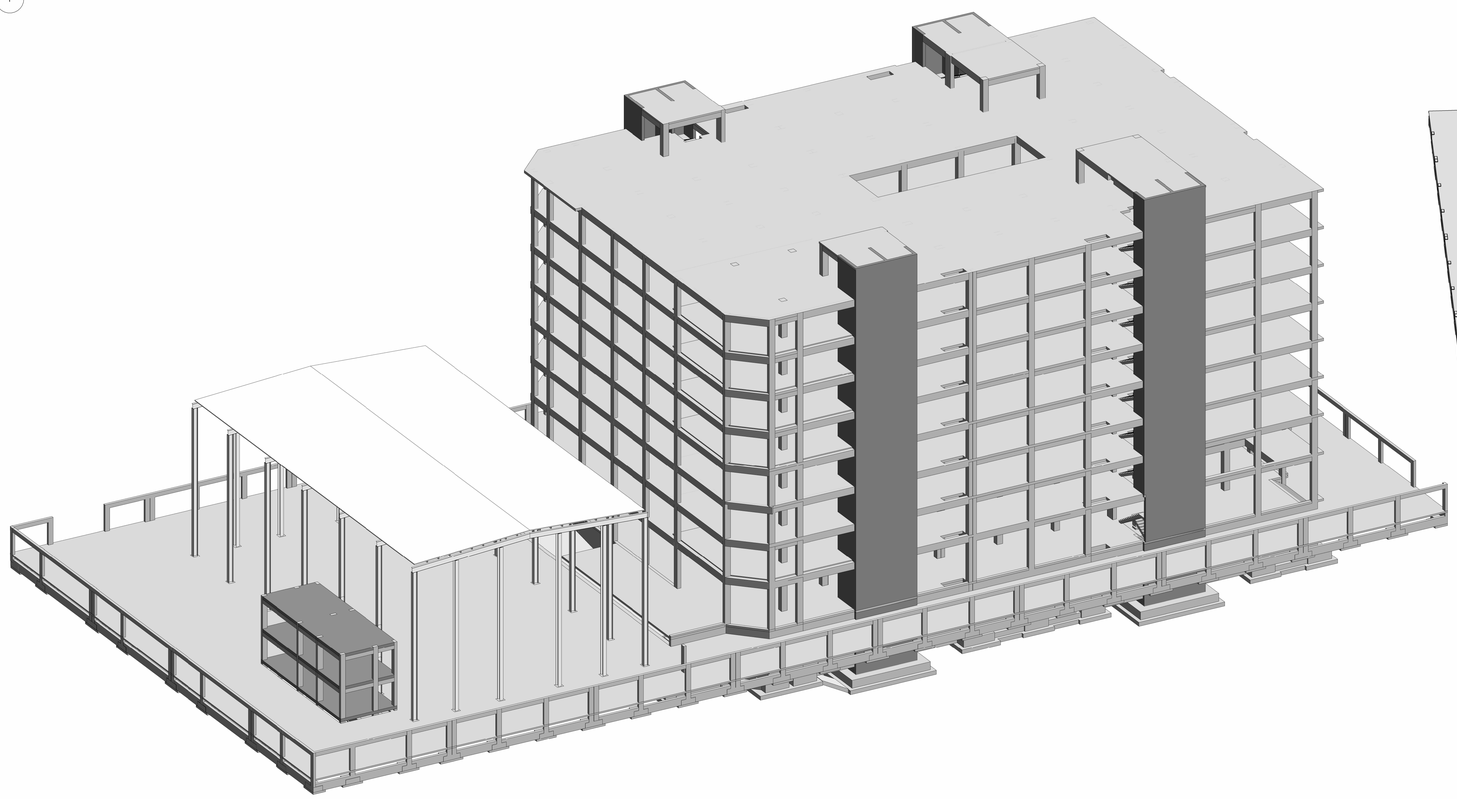

2 3D VIEW 2

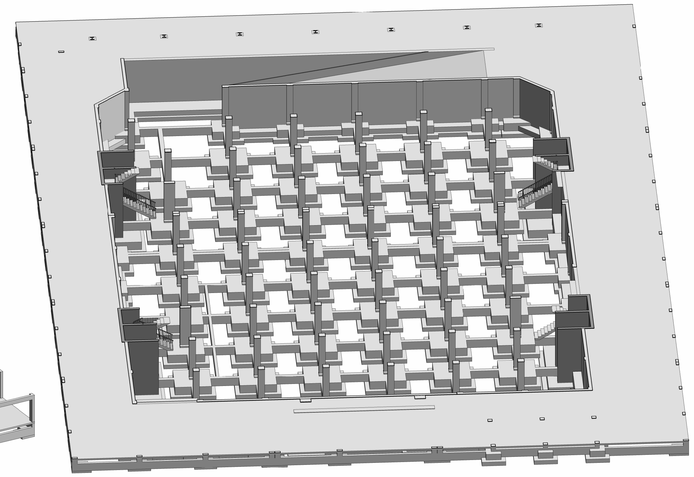

3 3D VIEW Foundation

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/2026

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


COVER SHEET

CLIENT


DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	01/11/2026 09:02:36

SCALE	PROJECT NUMBER
	KH 102


DRAWNING NUMBER	REV
A100	R00

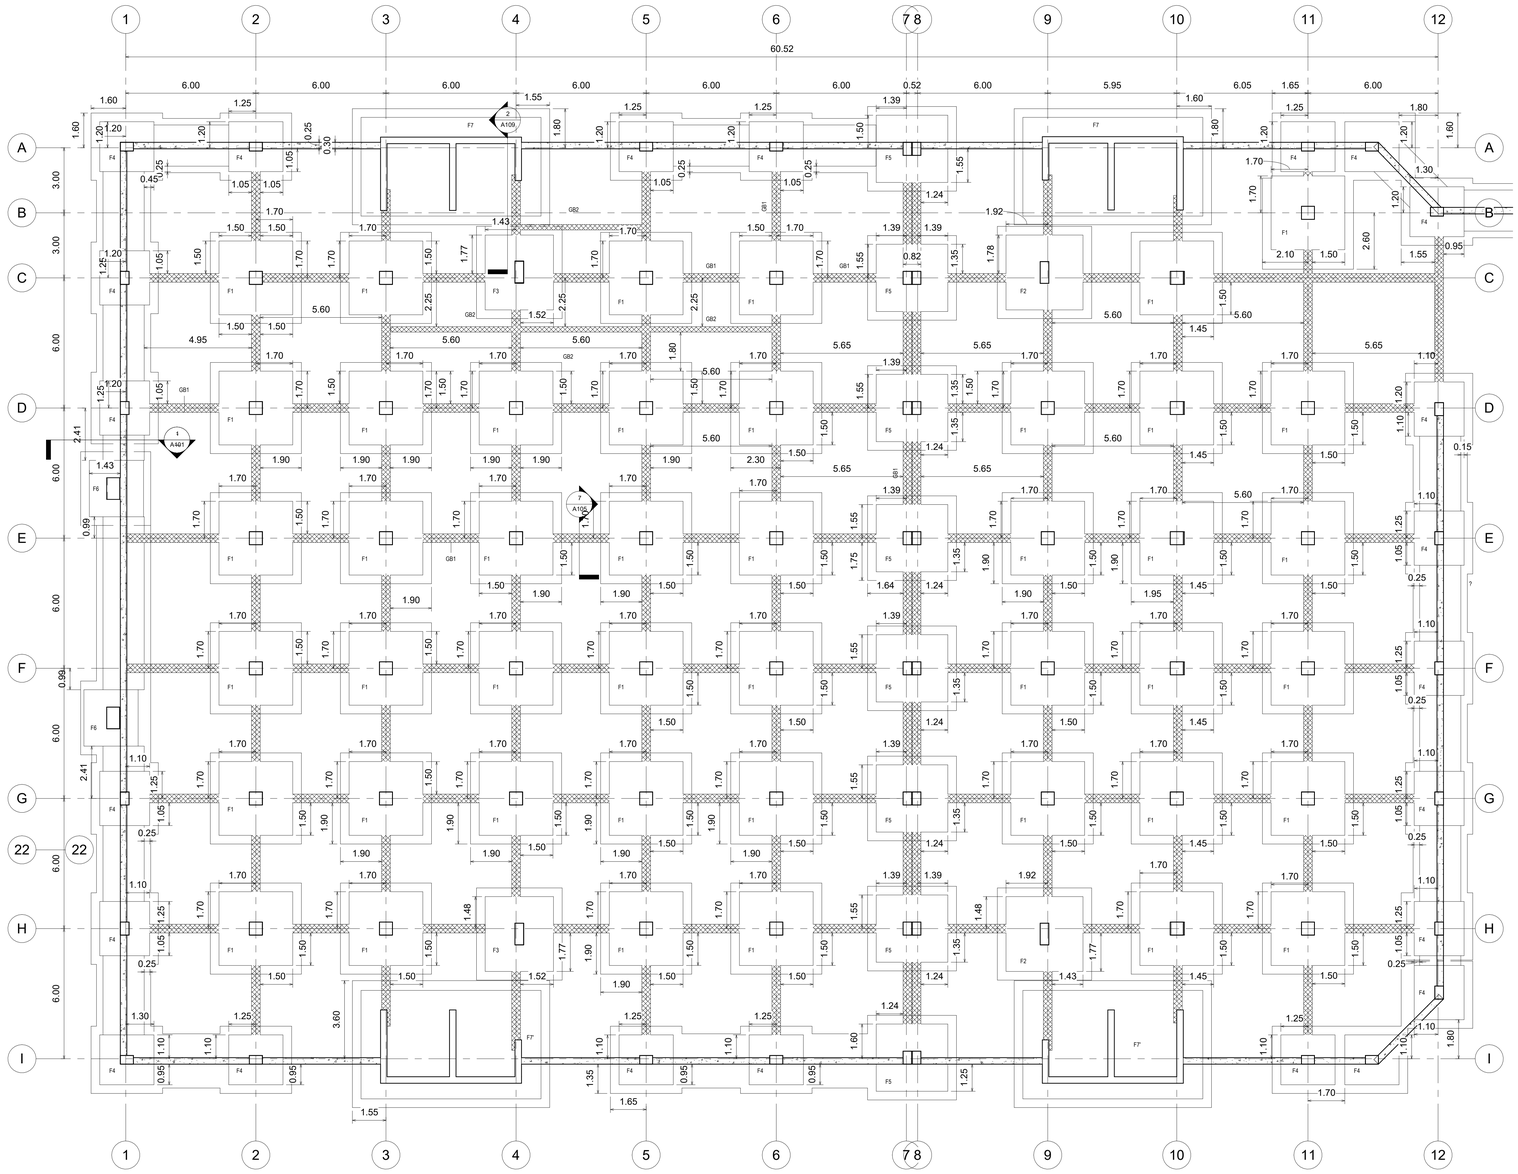


4 RC FOUNDATION LAYOUT - ADMIN BUILDING
1 : 100

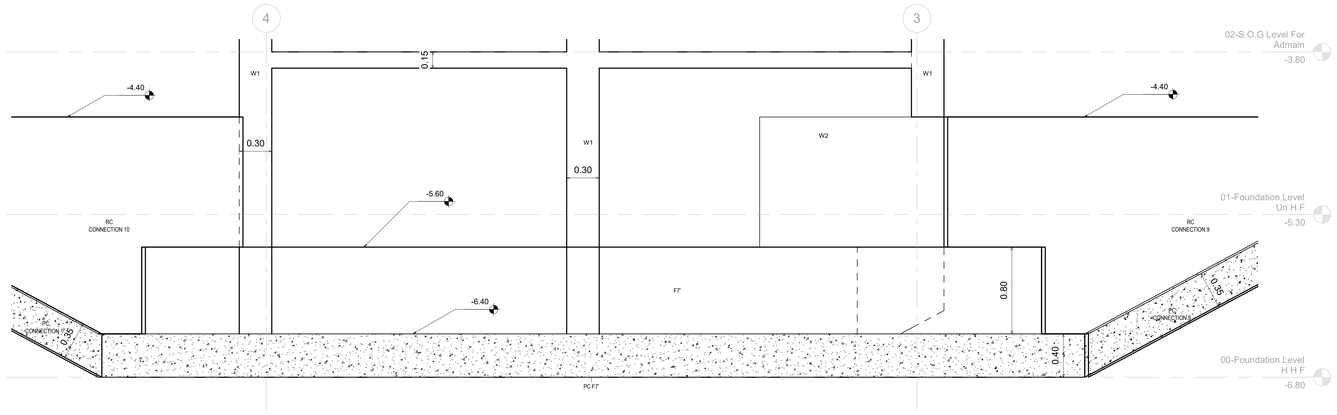


5 F7' DETAIL
1 : 20

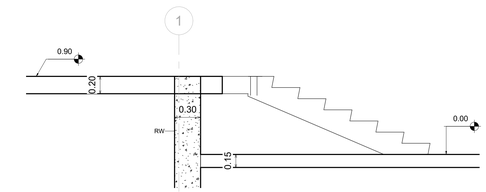


1 STAIR SEC 2
1 : 25

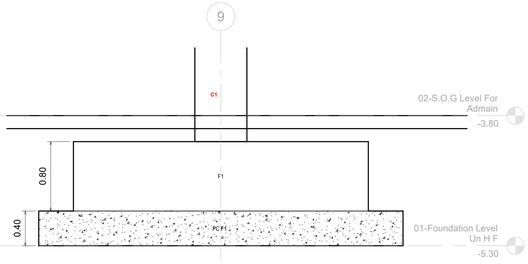

2 F1 DETAIL
1 : 25

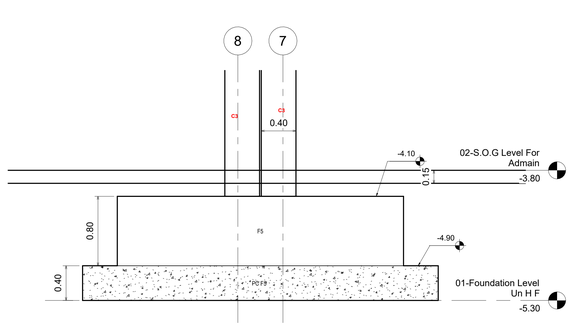

3 F5 DETAIL
1 : 25

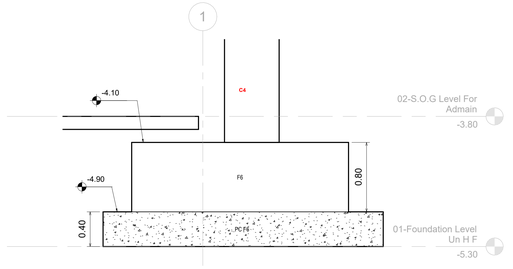

6 F6 DETAIL
1 : 25

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


RC FOUNDATION LAYOUT- ADMIN BUILDING

CLIENT


DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	01/11/2026 09:02:39

SCALE	PROJECT NUMBER
As indicated	KH 102


DRAWNING NUMBER	REV
A101	R00

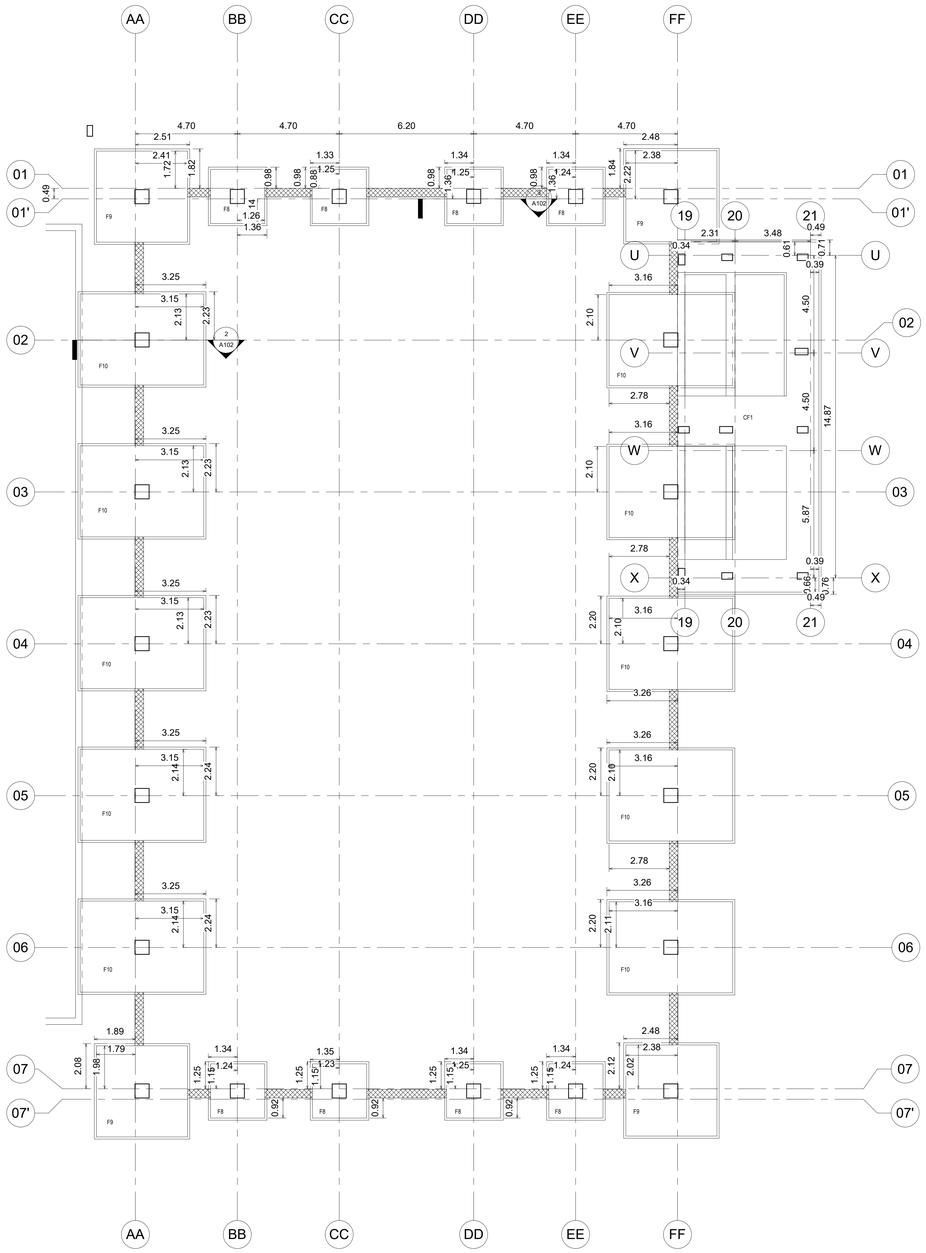


5 RC FOUNDATION LAYOUT - STEEL BUILDING
1 : 100

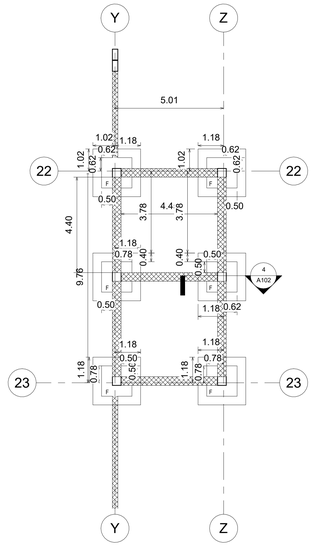


1 RC FOUNDATION LAYOUT -OFFICE
1 : 100

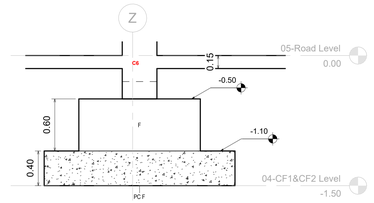

4 F DETAIL
1 : 25

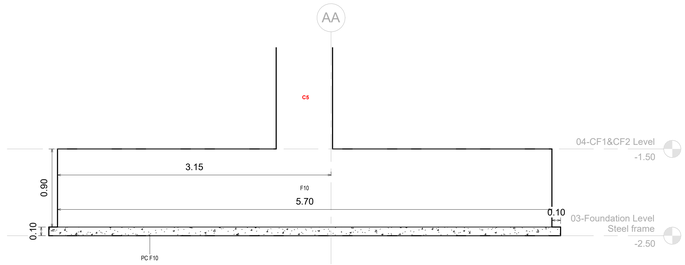

2 F10 DETAIL
1 : 25

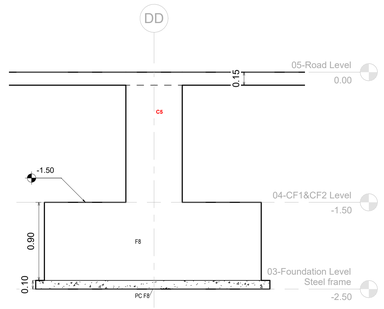

3 F8 DETAIL
1 : 25

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


RC FOUNDATION LAYOUT - STEEL BUILDING&OFFICE

CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	KAITECH	01/11/2026 09:02:40

SCALE	PROJECT NUMBER
As indicated	KH 102

DRAWNING NUMBER	REV
A102	R00

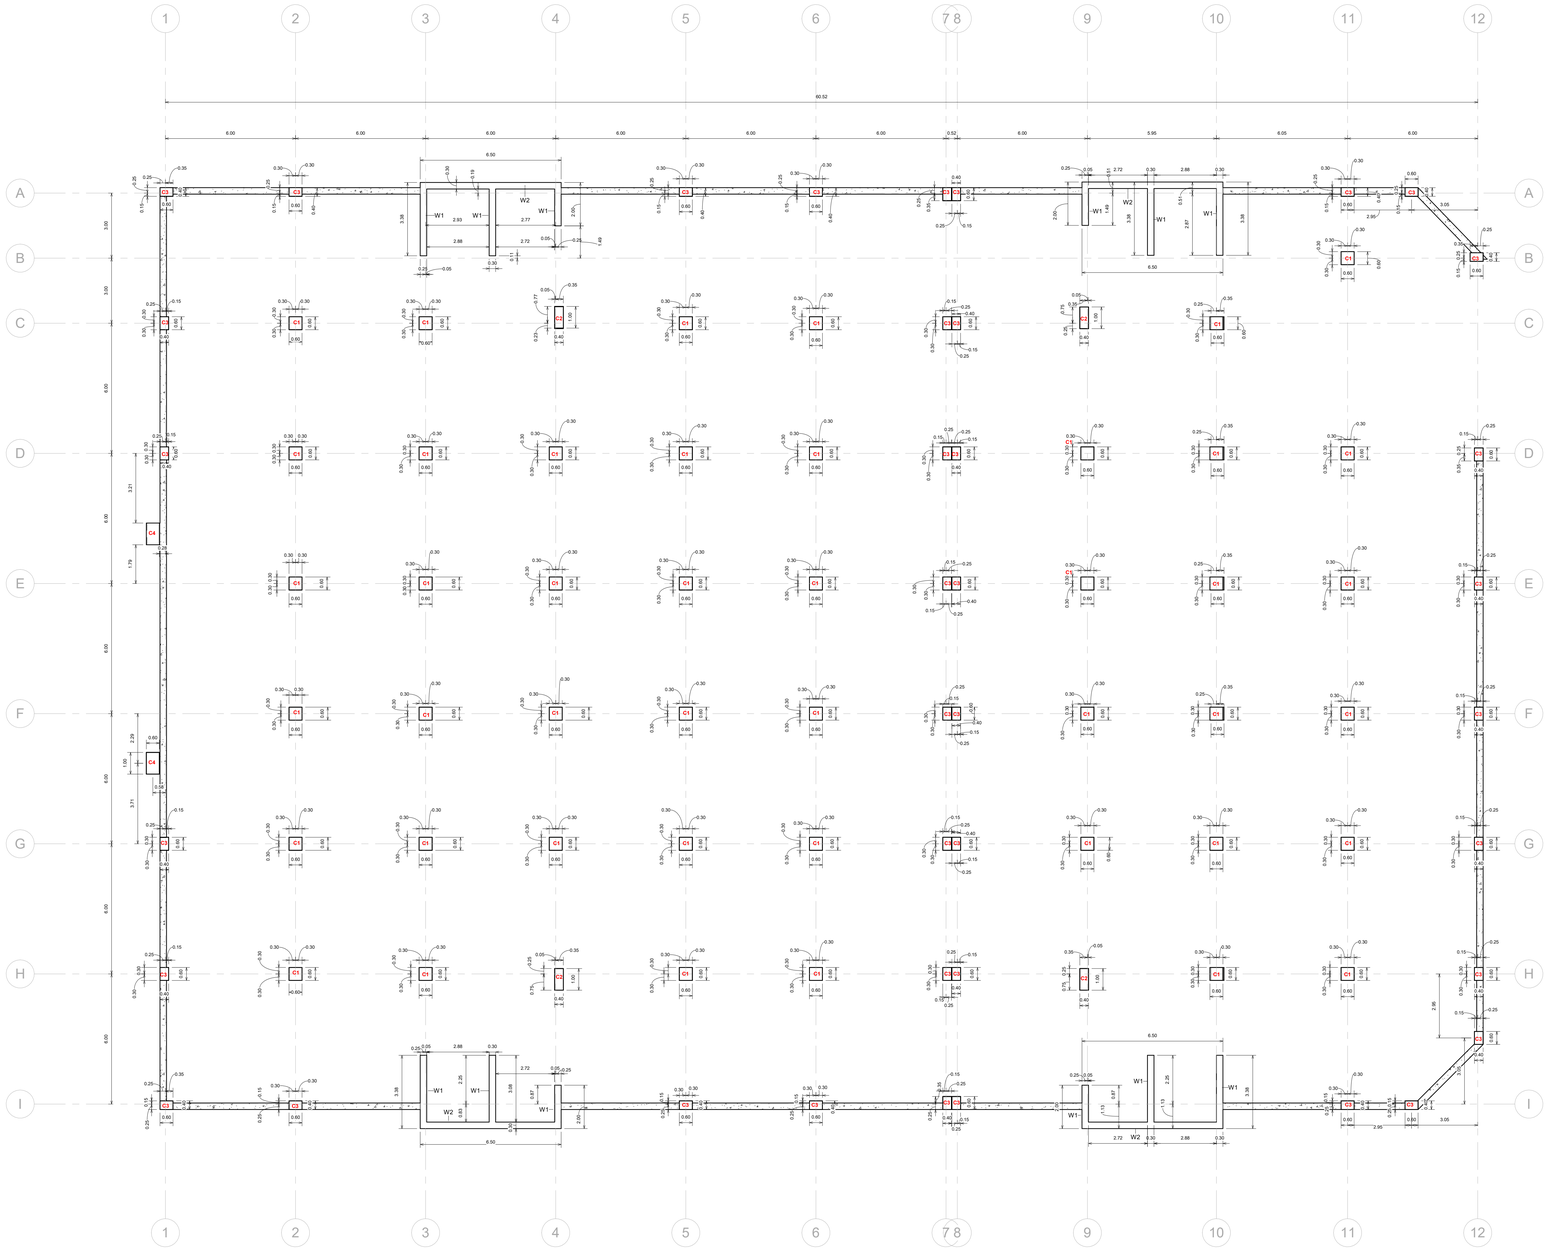

1 COLUMNS&AXIS LAYOUT PLAN - ADIMN BULDING

1 : 100

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


COLUMNS&AXIS LAYOUT PLAN- ADIMN BULDING

CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	KAITECH	01/11/2026 09:02:44

SCALE	PROJECT NUMBER
1 : 100	KH 102

DRAWNING NUMBER	REV
A103	R00

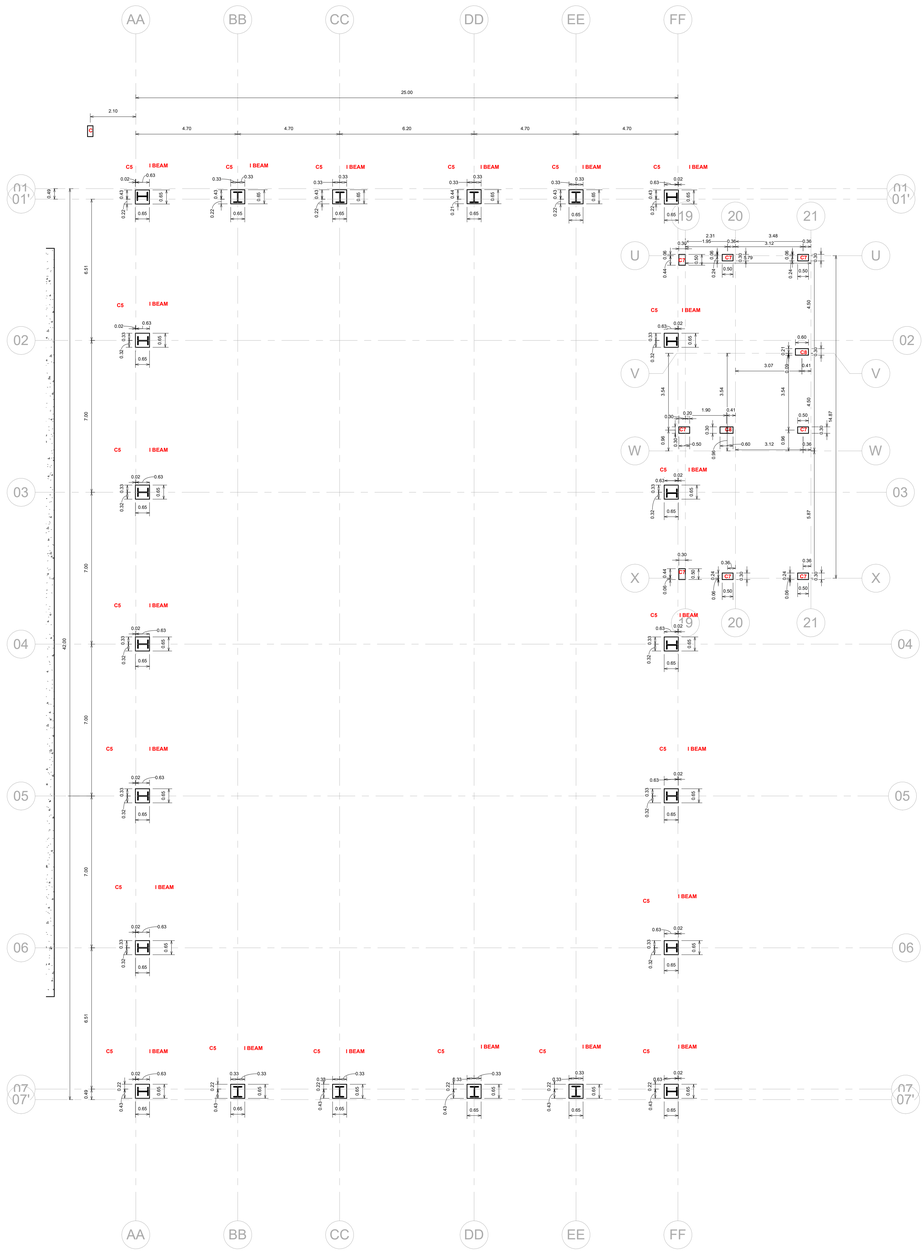

2 COLUMNS&AXIS LAYOUT PLAN - STEEL BUILDING

1 : 100

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


COLUMNS&AXIS LAYOUT PLAN- STEEL BUILDING

CLIENT


DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	01/11/2026 09:02:47

SCALE	PROJECT NUMBER
1 : 100	KH 102


DRAWNING NUMBER	REV
A104	R00

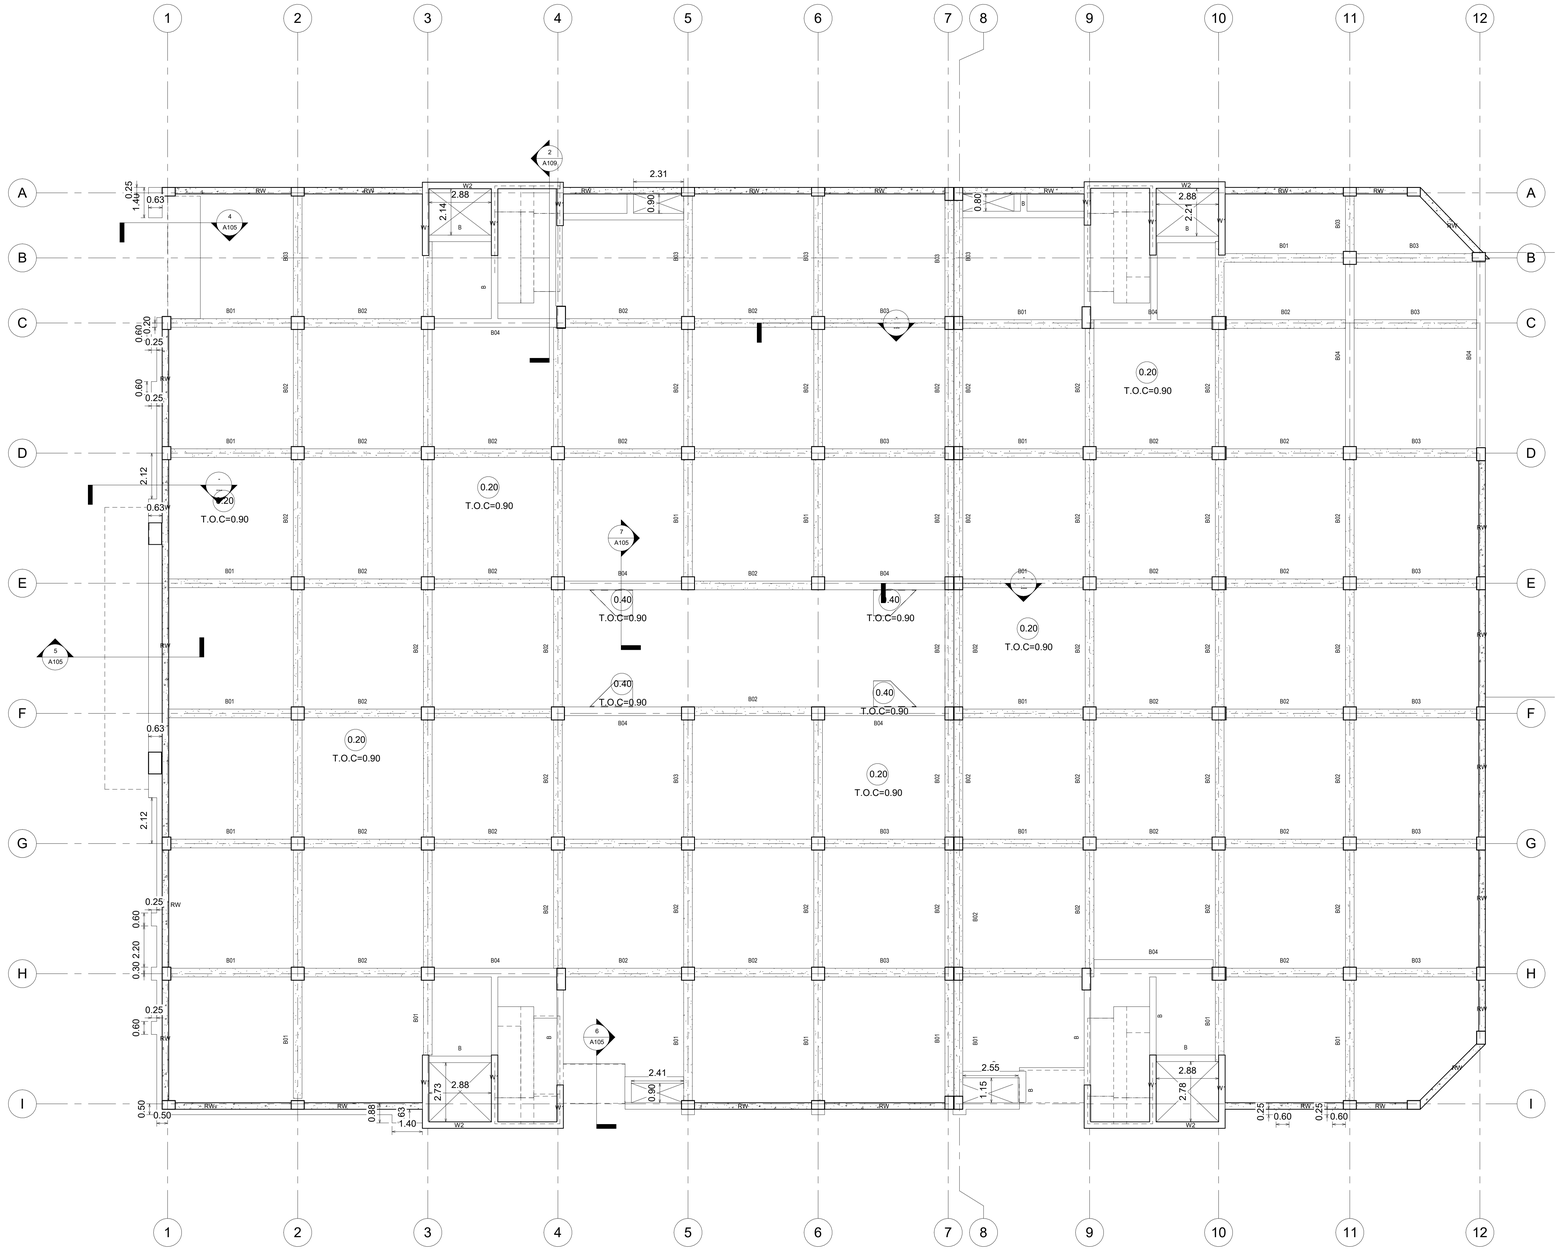


1 10-Basement Floor Level-ADMIN BULDING
1 : 100

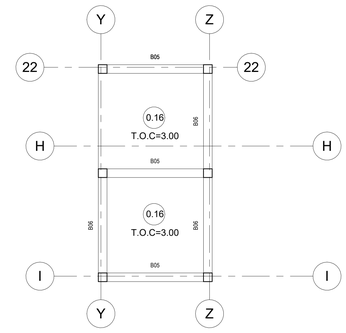


2 10-Basement Floor Level-OFFICE
1 : 100

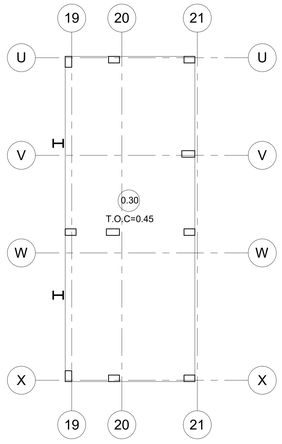


3 10-Basement Floor Level-STEEL BULDING
1 : 100

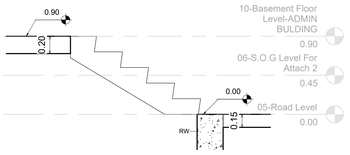


4 STAIR
1 : 25

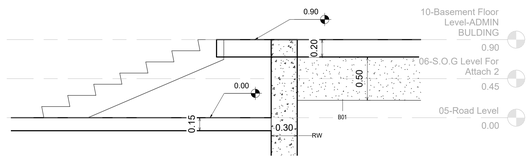

5 STAIR 2
1 : 25

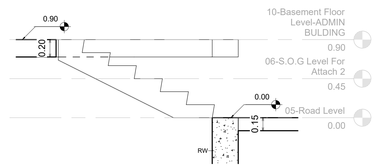

6 STAIR 3
1 : 25

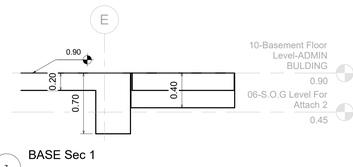

7 BASE Sec 1
1 : 25

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


RC LAYOUT FOR BASEMENT FLOOR

CLIENT


DRAWN BY	CHECKED BY	DATE
Khalid Atef	KAITECH	01/11/2026 09:02:49

SCALE	PROJECT NUMBER
As indicated	KH 102


DRAWNING NUMBER	REV
A105	R00

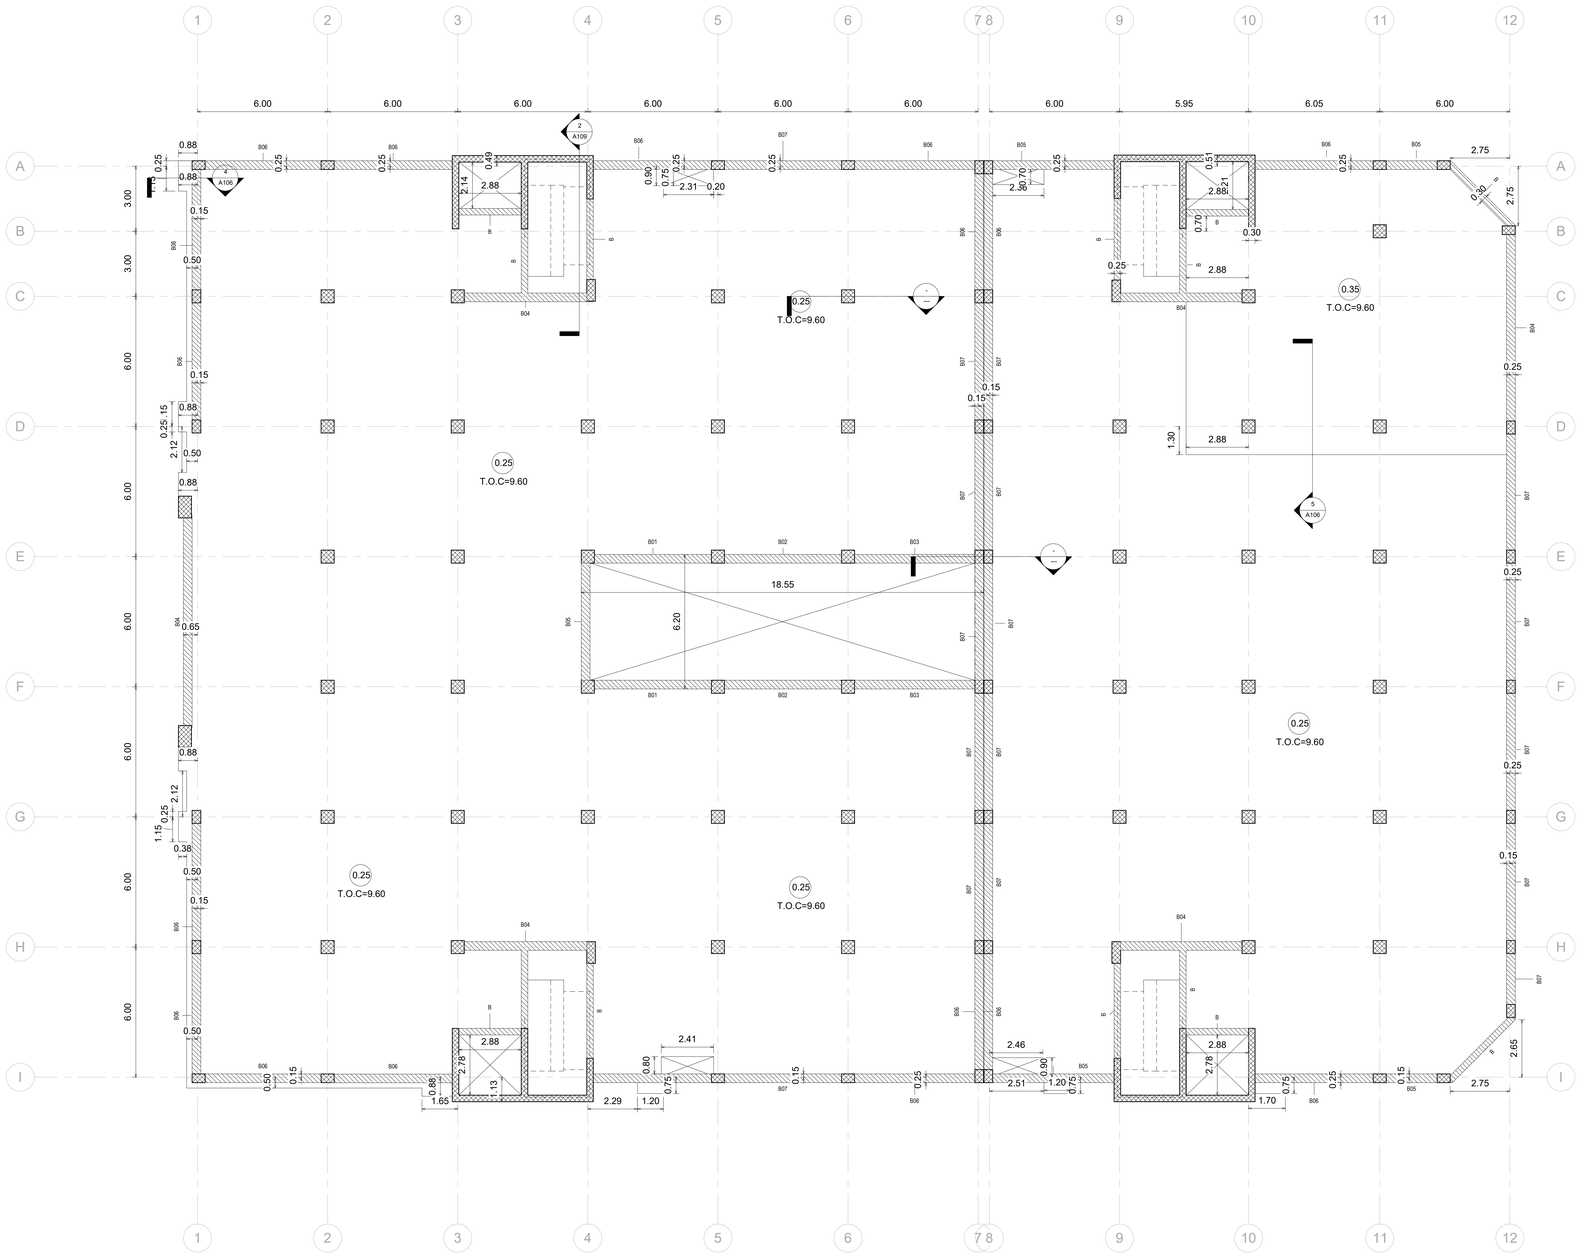


1 First Floor for Admin BUILDING
1 : 100

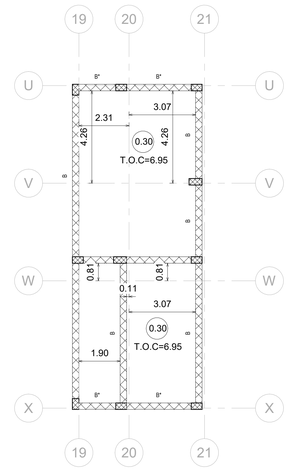

2 First Floor for Attach 2
1 : 100

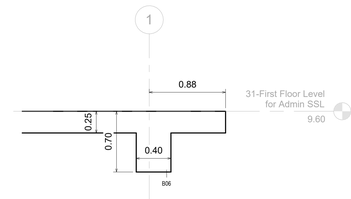

4 SEC 1-1ST FLOOR
1 : 25

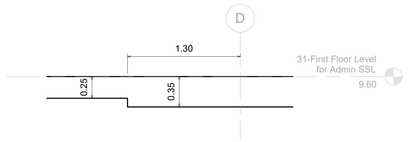

5 SEC 2-1ST FLOOR
1 : 25

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


RC LAYOUT FOR FIRST FLOOR

CLIENT


DRAWN BY	CHECKED BY	DATE
Khalid Atef	KAITECH	01/11/2026 09:02:50

SCALE	PROJECT NUMBER
As indicated	KH 102

DRAWNING NUMBER	REV
A106	R00

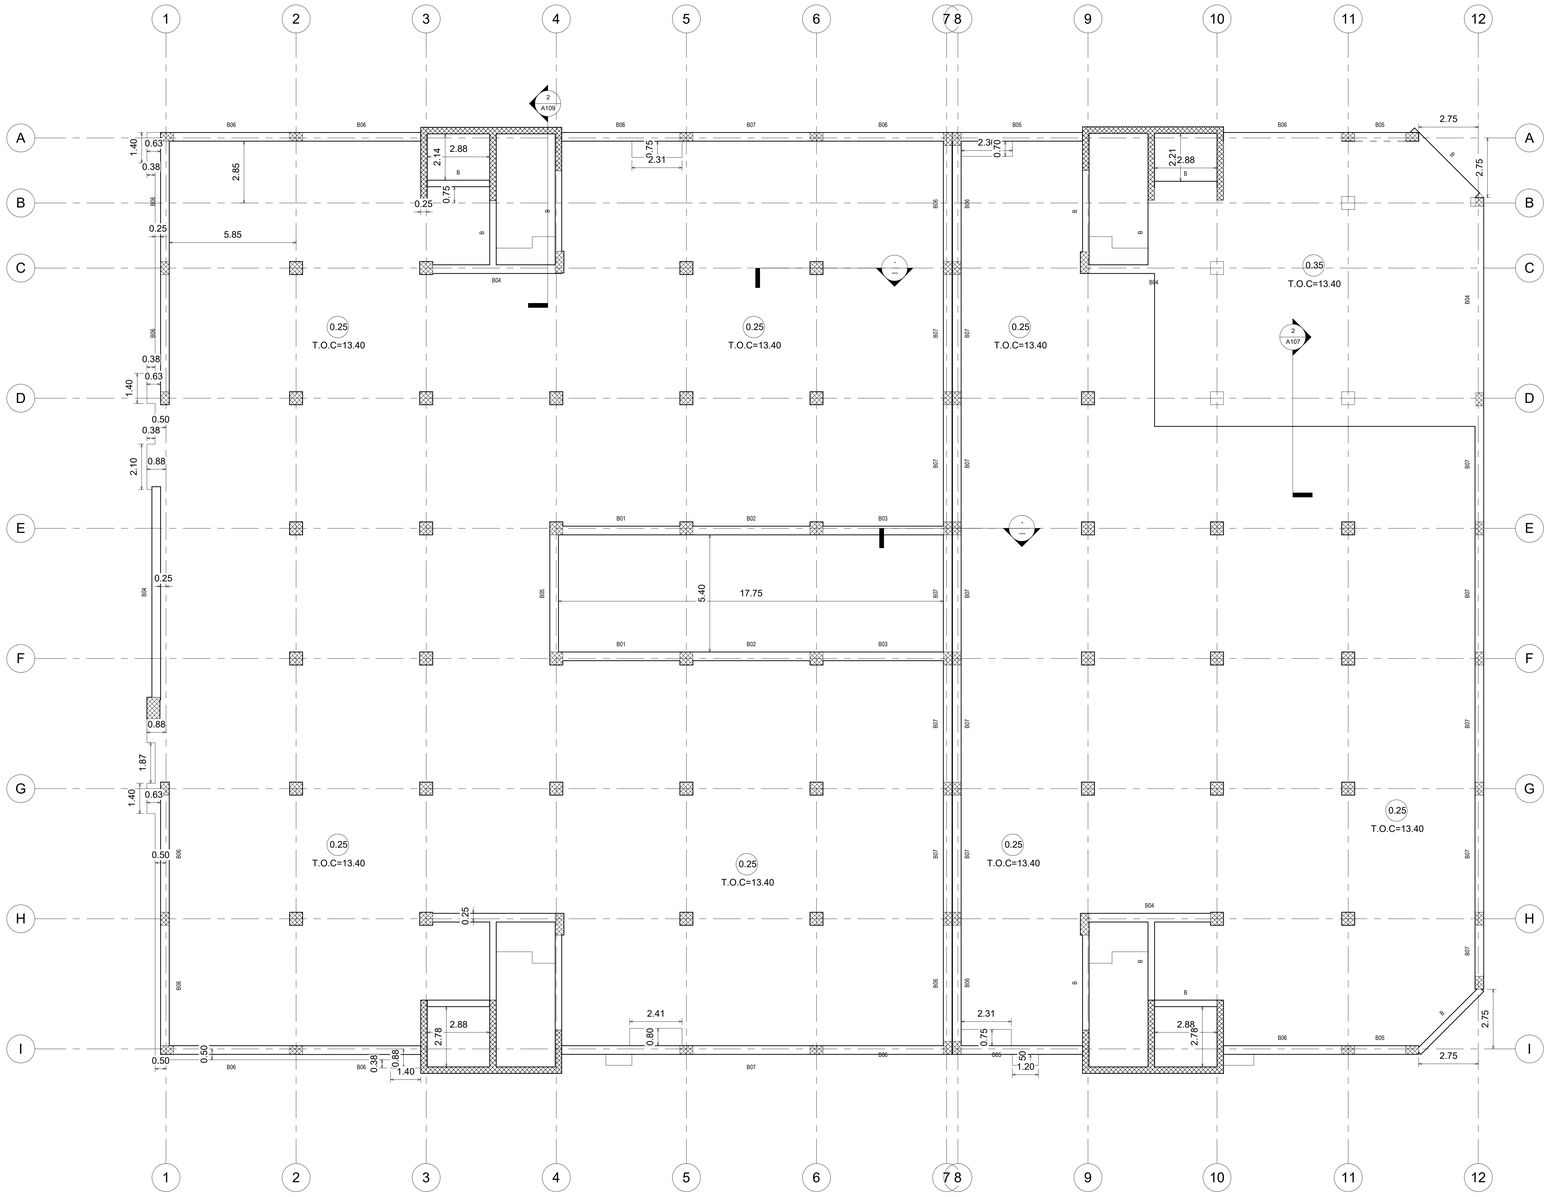

1 40-Second Floor-ADMIN BULDING
1 : 100

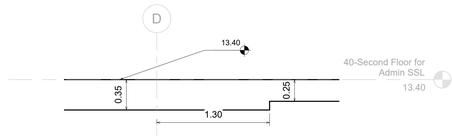

2 SECOND Sec
1 : 25

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


RC LAYOUT FOR TEYPICAL FLOOR

CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	KAITECH	01/11/2026 09:02:50

SCALE	PROJECT NUMBER
As indicated	KH 102

DRAWNING NUMBER	REV
A107	R00

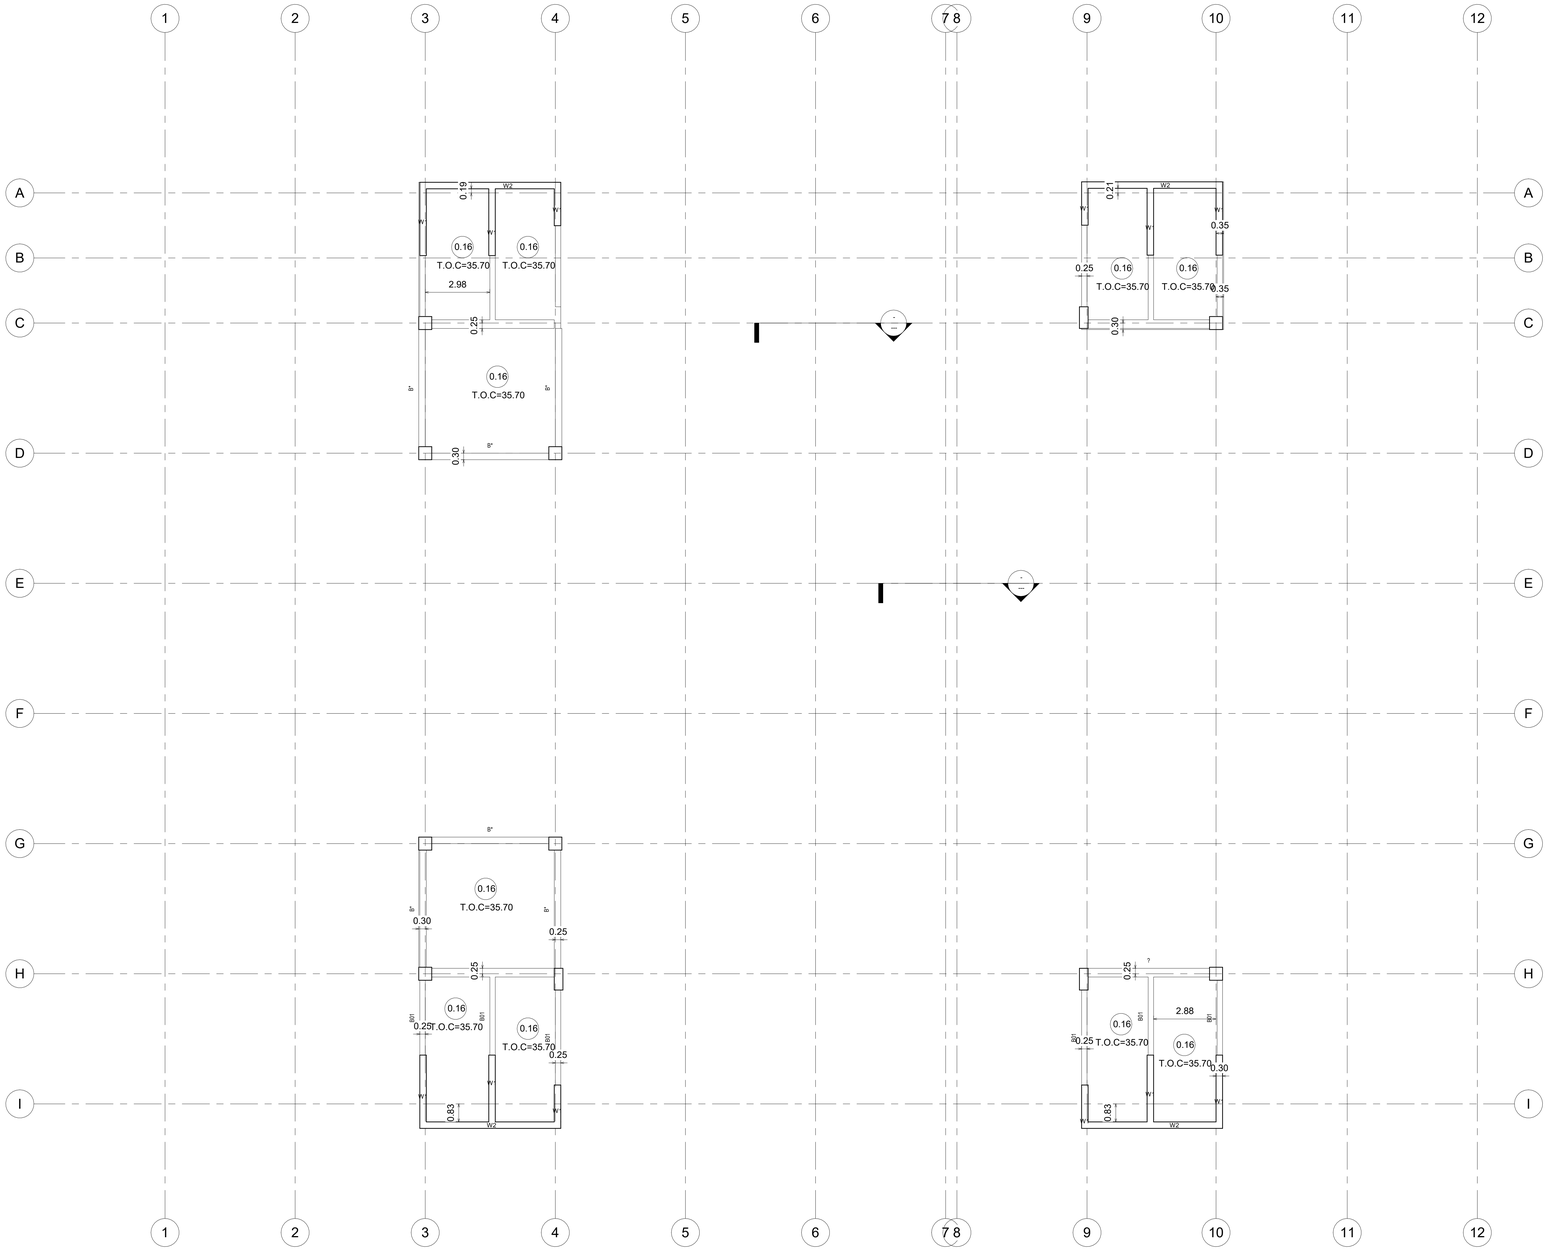

1 100-Upper Roof Floor Level for Admin SSL Copy 1

1 : 100

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/20 26

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE


RC LAYOUT FOR ROOF FLOOR

CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	KAITECH	01/11/2026 09:02:51

SCALE	PROJECT NUMBER
1 : 100	KH 102

DRAWNING NUMBER	REV
A108	R00

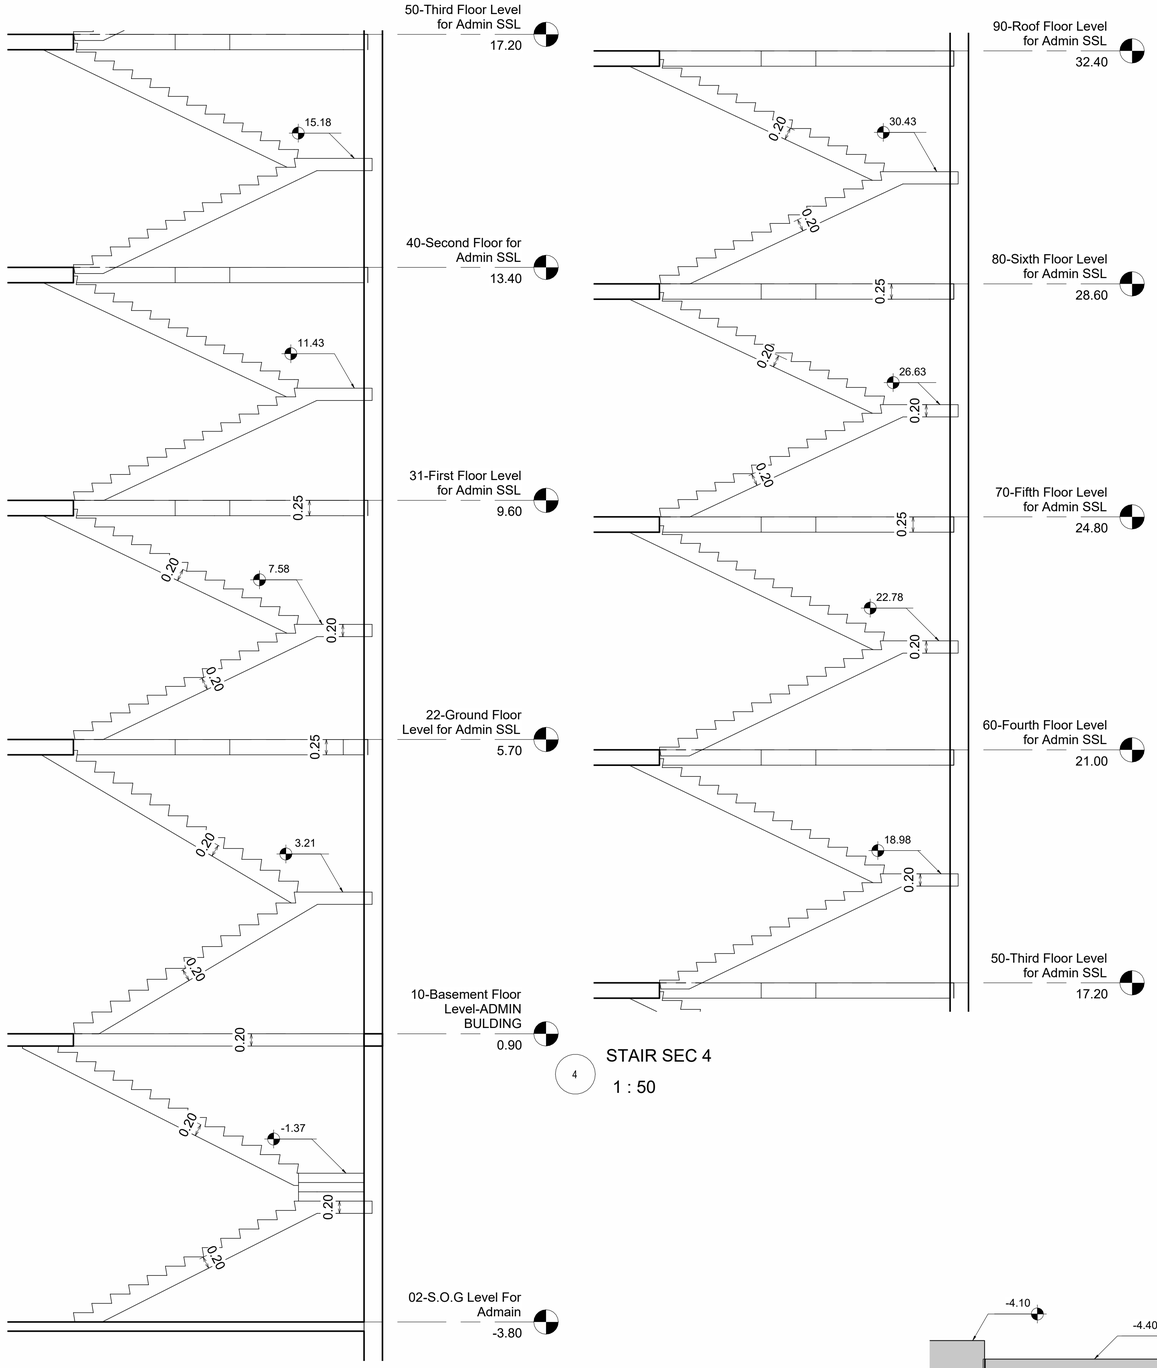

STAIR SEC 3


2

1 : 50

STAIR SEC 4

4


1 : 50

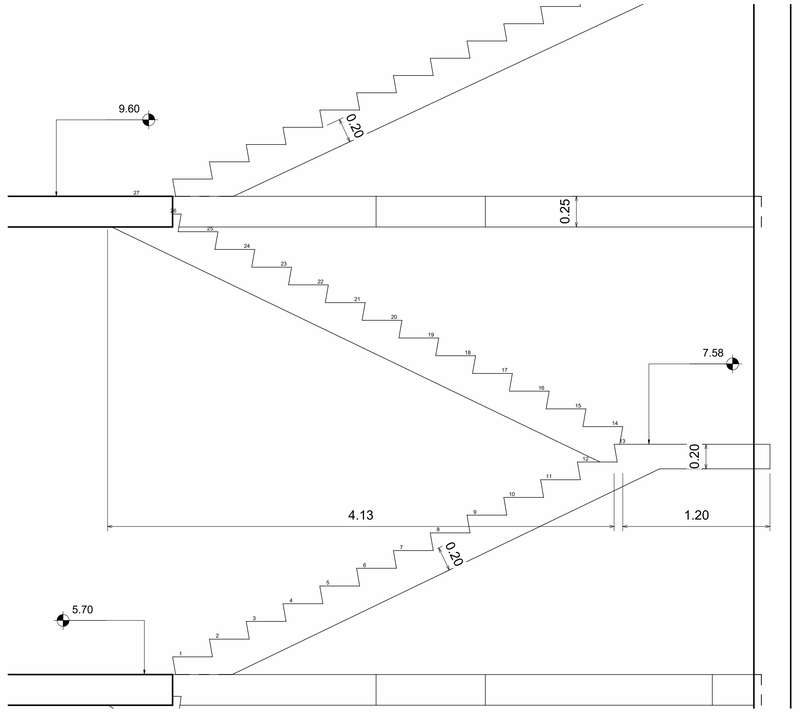

STAIR SEC

3

1 : 25

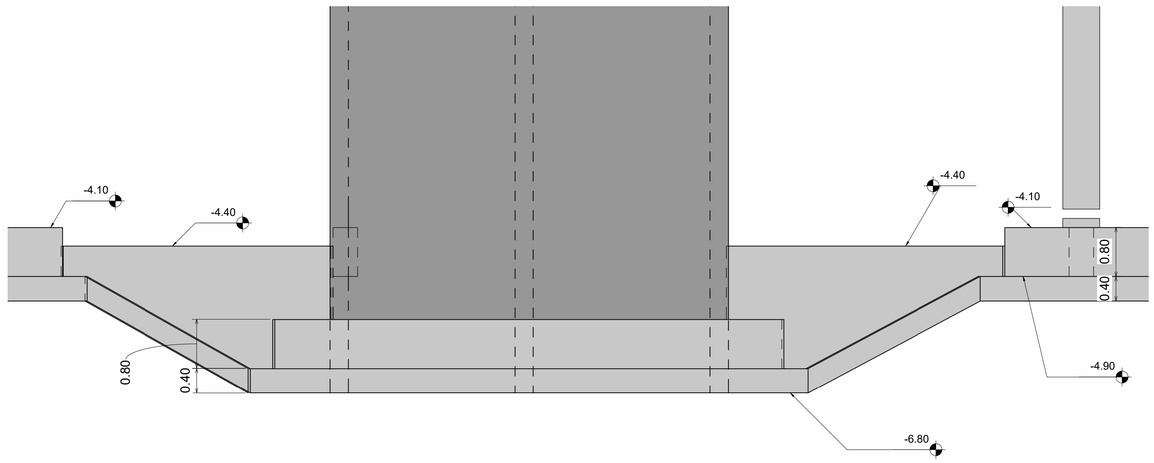

Hatched Footing Detail

1

1 : 50

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/2026

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE

SECTIONS SHEETS


CLIENT


DRAWN BY	CHECKED BY	DATE
Khalid Atef	KAITECH	01/07/26

SCALE (@ A1)	PROJECT NUMBER
As indicated	KH 102

DRAWING NUMBER	REV
A109	R00

01/11/2026 09:03:02 ص

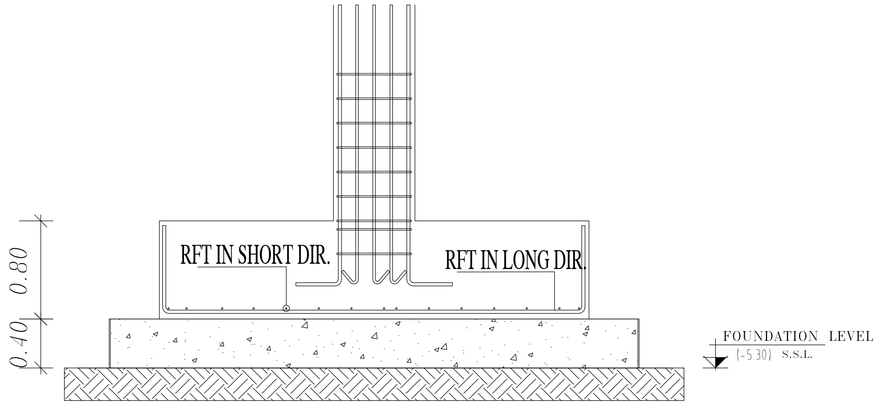

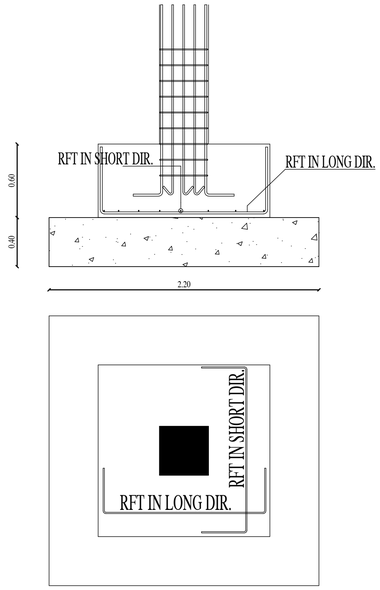


A – DETAILS OF "F" FOOTING

SCALE –

2 DETAIL OF F FOOTING

1 : 25

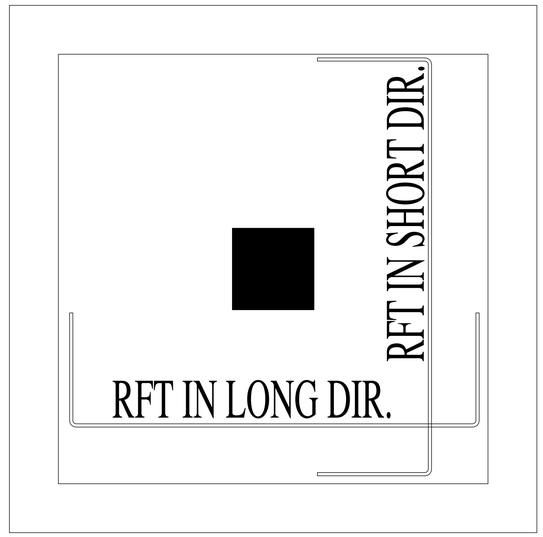


A – TYPICAL DETAILS OF UN HATCHED FOOTINGS

SCALE –

1 DETAIL OF UN HATCHED FOOTING

1 : 25

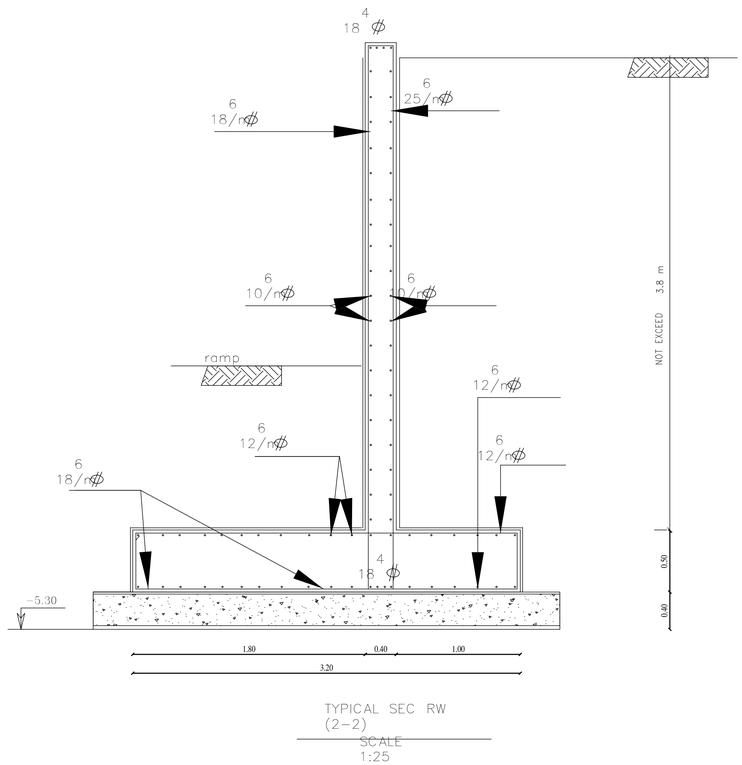

3 DETAIL OF RETAINING WALL

1 : 25

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/2026

CODE	SUITABILITY DESCRIPTION
STATUS	PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE

DRAFTING VIEW SHEET PART 2

CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	KAITECH	01/07/26

SCALE (@ A1)	PROJECT NUMBER
1 : 25	KH 102

DRAWING NUMBER	REV
A110	R00

01/11/2026 09:03:03 ص

Floors Schedule		
Level	Volume	Core Thickness
02-S.O.G Level For Admain	385.07 m³	0.15
05-Road Level	593.05 m³	0.15
06-S.O.G Level For Attach 2	26.89 m³	0.30
10-Basement Floor Level-ADMIN BULDING	506.68 m³	0.20
10-Basement Floor Level-ADMIN BULDING	2.65 m³	0.40
20-Ground Floor Level for Attach 1 SSL	8.25 m³	0.16
21-Ground Floor Level for Attach 2 SSL	24.39 m³	0.30
22-Ground Floor Level for Admin SSL	529.05 m³	0.25
22-Ground Floor Level for Admin SSL	63.75 m³	0.35
30-First Floor Level for Attach 2 SSL	26.42 m³	0.30
31-First Floor Level for Admin SSL	555.47 m³	0.25
31-First Floor Level for Admin SSL	67.54 m³	0.35
40-Second Floor for Admin SSL	557.78 m³	0.25
40-Second Floor for Admin SSL	64.39 m³	0.35
41-Top Level Of IPE Steel Coulmn	71.12 m³	<varies>
50-Third Floor Level for Admin SSL	557.78 m³	0.25
50-Third Floor Level for Admin SSL	64.27 m³	0.35
60-Fourth Floor Level for Admin SSL	551.32 m³	0.25
60-Fourth Floor Level for Admin SSL	63.89 m³	0.35
70-Fifth Floor Level for Admin SSL	551.23 m³	0.25
70-Fifth Floor Level for Admin SSL	63.95 m³	0.35
80-Sixth Floor Level for Admin SSL	551.23 m³	0.25
80-Sixth Floor Level for Admin SSL	63.86 m³	0.35
90-Roof Floor Level for Admin SSL	560.37 m³	0.25
90-Roof Floor Level for Admin SSL	63.86 m³	0.35
100-Upper Roof Floor Level for Admin SSL	38.86 m³	0.16
Grand total	6613.13 m³	

Structural Columns Schedule			
Base Level	Type	Count	Volume
01-Foundation Level Un H F	C1 600 x 600mm	179	160.15 m³
01-Foundation Level Un H F	C2 400 x 1000mm	17	18.40 m³
01-Foundation Level Un H F	C3 400 x 600mm	159	90.53 m³
01-Foundation Level Un H F	C4 600 x 1000mm	9	17.58 m³
03-Foundation Level Steel frame	C5 650 x 650mm	22	13.94 m³
04-CF1&CF2 Level	250 x 500mm	80	34.98 m³
04-CF1&CF2 Level	C6 400 x 400mm	6	3.22 m³
04-CF1&CF2 Level	C7 300 x 500mm	8	5.39 m³
04-CF1&CF2 Level	C8 300 x 600mm	2	1.64 m³
21-Ground Floor Level for Attach 2 SSL	C7 300 x 500mm	8	3.96 m³
21-Ground Floor Level for Attach 2 SSL	C8 300 x 600mm	2	1.19 m³
22-Ground Floor Level for Admin SSL	C1 600 x 600mm	44	57.56 m³
22-Ground Floor Level for Admin SSL	C2 400 x 1000mm	4	5.84 m³
22-Ground Floor Level for Admin SSL	C3 400 x 600mm	40	34.13 m³
22-Ground Floor Level for Admin SSL	C4 600 x 1000mm	2	4.38 m³
31-First Floor Level for Admin SSL	C1 600 x 600mm	44	56.09 m³
31-First Floor Level for Admin SSL	C2 400 x 1000mm	4	5.68 m³
31-First Floor Level for Admin SSL	C3 400 x 600mm	39	33.23 m³
31-First Floor Level for Admin SSL	C4 600 x 1000mm	1	2.13 m³
40-Second Floor for Admin SSL	C1 600 x 600mm	44	56.23 m³
40-Second Floor for Admin SSL	C2 400 x 1000mm	4	5.68 m³
40-Second Floor for Admin SSL	C3 400 x 600mm	39	33.23 m³
40-Second Floor for Admin SSL	C4 600 x 1000mm	1	2.13 m³
50-Third Floor Level for Admin SSL	C1 600 x 600mm	44	60.16 m³
50-Third Floor Level for Admin SSL	C2 400 x 1000mm	4	6.08 m³
50-Third Floor Level for Admin SSL	C3 400 x 600mm	39	35.57 m³
50-Third Floor Level for Admin SSL	C4 600 x 1000mm	1	2.28 m³
60-Fourth Floor Level for Admin SSL	C1 600 x 600mm	44	60.07 m³
60-Fourth Floor Level for Admin SSL	C2 400 x 1000mm	4	6.08 m³
60-Fourth Floor Level for Admin SSL	C3 400 x 600mm	38	34.66 m³
60-Fourth Floor Level for Admin SSL	C4 600 x 1000mm	2	4.56 m³
70-Fifth Floor Level for Admin SSL	C1 600 x 600mm	44	60.19 m³
70-Fifth Floor Level for Admin SSL	C2 400 x 1000mm	4	6.08 m³
70-Fifth Floor Level for Admin SSL	C3 400 x 600mm	38	34.66 m³
70-Fifth Floor Level for Admin SSL	C4 600 x 1000mm	2	4.56 m³
80-Sixth Floor Level for Admin SSL	C1 600 x 600mm	44	60.19 m³
80-Sixth Floor Level for Admin SSL	C2 400 x 1000mm	4	6.08 m³
80-Sixth Floor Level for Admin SSL	C3 400 x 600mm	38	34.66 m³
80-Sixth Floor Level for Admin SSL	C4 600 x 1000mm	2	4.56 m³
90-Roof Floor Level for Admin SSL	C1 600 x 600mm	8	9.39 m³
90-Roof Floor Level for Admin SSL	C2 400 x 1000mm	3	3.96 m³
Grand total			1081.06 m³

Structural Foundation Schedule		
Type	Count	Volume
CF1 300mm Foundation Slab	1	11.64 m³
CF2 300mm Foundation Slab	1	3.47 m³
F1 1000 x 1500 x 500mm	38	28.50 m³
F1 3400 x 3400 x 800mm	44	406.91 m³
F1* 1000 x 1500 x 500mm	4	3.00 m³
F2 1000 x 1800 x 500mm	19	17.10 m³
F2 3450 x 3550 x 800mm	2	19.60 m³
F3 3150 x 3450 x 800mm	2	17.39 m³
F4 2300 x 2500 x 800mm	23	104.04 m³
F5 3100 x 3300 x 800mm	8	65.47 m³
F6 2500 x 2600 x 800mm	2	10.40 m³
F7 8300 x 4550 x 800mm	2	60.42 m³
F7 8300 x 5000 x 800mm	2	66.40 m³
F8 2500 x 2500 x 900mm	8	45.00 m³
F9 4200 x 4200 x 900mm	4	63.49 m³
F10 4200 x 5700 x 900mm	10	214.92 m³
F 1400 x 1400 x 600mm	6	7.06 m³
P.C F1 1300 x 2100 x 200 mm	39	21.29 m³
P.C F1 4200 x 4200 x 400mm	88	310.31 m³
P.C F1* 1300 x 1800 x 200 mm	4	1.87 m³
P.C F2 1300 x 2400 x 200 mm	18	11.23 m³
P.C F2 4250 x 4350 x 400mm	4	14.79 m³
P.C F3 3950 x 4250 x 400mm	4	13.43 m³
P.C F4 3100 x 3300 x 400mm	46	93.64 m³
P.C F5 3900 x 4100 x 400mm	16	51.17 m³
P.C F6 3050 x 3400 x 400mm	4	5.39 m³
P.C F7 9100 x 5350 x 400mm	2	38.95 m³

Structural Foundation Schedule		
Type	Count	Volume
P.C F7 9100 x 5850 x 400mm	3	42.59 m³
P.C F8 2700 x 2700 x 100mm	8	5.83 m³
P.C F9 4400 x 4400 x 100mm	4	7.74 m³
P.C F10 4400 x 5900 x 100mm	10	25.96 m³
P.C F 2200 x 2200 x 400mm	11	11.62 m³
P.C Strip Footing Connection 1	1	2.80 m³
P.C Strip Footing Connection 1	1	1.66 m³
P.C Strip Footing Connection 1	1	2.80 m³
P.C Strip Footing Connection 2	1	2.80 m³
P.C Strip Footing Connection 2	1	2.80 m³
P.C Strip Footing Connection 3	1	2.80 m³
P.C Strip Footing Connection 3	1	2.80 m³
P.C Strip Footing Connection 4	1	2.66 m³
P.C Strip Footing Connection 4	1	2.66 m³
PC CF1 100mm Foundation Slab	1	6.20 m³
R.C Strip Footing Connection 1	1	10.60 m³
R.C Strip Footing Connection 1	1	5.60 m³
R.C Strip Footing Connection 1	1	10.60 m³
R.C Strip Footing Connection 2	1	10.60 m³
R.C Strip Footing Connection 2	1	10.60 m³
R.C Strip Footing Connection 3	1	10.60 m³
R.C Strip Footing Connection 3	1	10.60 m³
R.C Strip Footing Connection 4	1	10.37 m³
R.C Strip Footing Connection 4	1	10.37 m³
R.W 400mm Foundation P.C Slab	2	106.59 m³
R.W 500mm Foundation R.C Slab	4	123.03 m³
Grand total		2150.19 m³

CONSULTANT

CONTRACTOR

NOTES

KEY PLAN

REVISION SCHEDULE

REV	Date	ISSUED FOR	Issued by	Issued to
R00	19/1/2026	ISSUED FOR CONSTRUCTION		

DISCIPLINE

SHEET TILLE

QS SHEETS (FLOORS & COULMNS & FOUNDATION)

DRW BY :

Khalid Atef

CHK BY :

Checker

SCALE

REVISION

R00

Stair Material Take off

Base Level	Top Level	Type	Material: Volume
02-S.O.G Level For Admain	10-Basement Floor Level-ADMIN BULDING	Stair 20cm	14.24 m³
05-Road Level	10-Basement Floor Level-ADMIN BULDING	Stair 20cm	12.30 m³
06-S.O.G Level For Attach 2	21-Ground Floor Level for Attach 2 SSL	Stair 300mm	2.37 m³
10-Basement Floor Level-ADMIN BULDING	22-Ground Floor Level for Admin SSL	Stair 20cm	15.19 m³
22-Ground Floor Level for Admin SSL	31-First Floor Level for Admin SSL	Stair 20cm	14.06 m³
31-First Floor Level for Admin SSL	40-Second Floor for Admin SSL	Stair 20cm	13.94 m³
40-Second Floor for Admin SSL	50-Third Floor Level for Admin SSL	Stair 20cm	14.03 m³
50-Third Floor Level for Admin SSL	60-Fourth Floor Level for Admin SSL	Stair 20cm	14.03 m³
60-Fourth Floor Level for Admin SSL	70-Fifth Floor Level for Admin SSL	Stair 20cm	14.07 m³
70-Fifth Floor Level for Admin SSL	80-Sixth Floor Level for Admin SSL	Stair 20cm	13.98 m³
80-Sixth Floor Level for Admin SSL	90-Roof Floor Level for Admin SSL	Stair 20cm	13.94 m³
Grand total			142.14 m³

Structural Framing Schedule

Reference Level	Type	Count	Volume
01-Foundation Level Un H F	GB1 400 x 800mm	131	118.76 m³
01-Foundation Level Un H F	GB2 250 x 800mm	4	4.47 m³
01-Foundation Level Un H F	Metsec-202Z14	108	0.35 m³
03-Foundation Level Steel frame	GB1 400 x 800mm	22	16.79 m³
04-CF1&CF2 Level	GB1 400 x 800mm	7	8.22 m³
04-CF1&CF2 Level	Smell Fence 250 x 800mm	63	53.13 m³
10-Basement Floor Level-ADMIN BULDING	B01 400 x 700mm	23	24.59 m³
10-Basement Floor Level-ADMIN BULDING	B02 400 x 700mm	73	78.87 m³
10-Basement Floor Level-ADMIN BULDING	B03 400 x 700mm	21	21.57 m³
10-Basement Floor Level-ADMIN BULDING	B04 400 x 700mm	10	12.21 m³
10-Basement Floor Level-ADMIN BULDING	B 250 x 700mm	20	9.43 m³
23-Top Level Of The Fence	Beam Fence 250 x 400mm	56	27.61 m³
20-Ground Floor Level for Attach 1 SSL	B05 400 x 700mm	3	2.88 m³
20-Ground Floor Level for Attach 1 SSL	B06 400 x 700mm	3	2.85 m³
21-Ground Floor Level for Attach 2 SSL	B 250 x 700mm	6	4.07 m³
21-Ground Floor Level for Attach 2 SSL	B* 250 x 700mm	6	1.65 m³
22-Ground Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
22-Ground Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
22-Ground Floor Level for Admin SSL	B04 400 x 700mm	9	9.83 m³
22-Ground Floor Level for Admin SSL	B05 400 x 700mm	8	6.92 m³
22-Ground Floor Level for Admin SSL	B06 400 x 700mm	18	17.74 m³
22-Ground Floor Level for Admin SSL	B07 400 x 700mm	18	16.94 m³
22-Ground Floor Level for Admin SSL	B 250 x 700mm	16	7.78 m³
30-First Floor Level for Attach 2 SSL	B 250 x 700mm	6	4.07 m³
30-First Floor Level for Attach 2 SSL	B* 250 x 700mm	6	1.65 m³
31-First Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
31-First Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
31-First Floor Level for Admin SSL	B03 400 x 700mm	2	2.00 m³
31-First Floor Level for Admin SSL	B04 400 x 700mm	6	6.88 m³
31-First Floor Level for Admin SSL	B05 400 x 700mm	5	3.86 m³
31-First Floor Level for Admin SSL	B06 400 x 700mm	18	17.50 m³
31-First Floor Level for Admin SSL	B07 400 x 700mm	17	15.93 m³
31-First Floor Level for Admin SSL	B 250 x 700mm	14	6.52 m³
40-Second Floor for Admin SSL	B01 400 x 700mm	2	1.94 m³
40-Second Floor for Admin SSL	B02 400 x 700mm	2	1.94 m³
40-Second Floor for Admin SSL	B03 400 x 700mm	2	2.00 m³
40-Second Floor for Admin SSL	B04 400 x 700mm	6	7.24 m³
40-Second Floor for Admin SSL	B05 400 x 700mm	5	3.95 m³
40-Second Floor for Admin SSL	B06 400 x 700mm	18	17.72 m³
40-Second Floor for Admin SSL	B07 400 x 700mm	17	15.97 m³
40-Second Floor for Admin SSL	B 250 x 700mm	14	6.65 m³

Structural Framing Schedule

Reference Level	Type	Count	Volume
41-Top Level Of IPE Steel Coulmn	IPE500	14	1.95 m³
50-Third Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
50-Third Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
50-Third Floor Level for Admin SSL	B03 400 x 700mm	2	2.00 m³
50-Third Floor Level for Admin SSL	B04 400 x 700mm	6	7.34 m³
50-Third Floor Level for Admin SSL	B05 400 x 700mm	5	3.94 m³
50-Third Floor Level for Admin SSL	B06 400 x 700mm	18	17.71 m³
50-Third Floor Level for Admin SSL	B07 400 x 700mm	17	15.97 m³
50-Third Floor Level for Admin SSL	B 250 x 700mm	14	6.64 m³
60-Fourth Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
60-Fourth Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
60-Fourth Floor Level for Admin SSL	B03 400 x 700mm	2	2.00 m³
60-Fourth Floor Level for Admin SSL	B04 400 x 700mm	6	7.35 m³
60-Fourth Floor Level for Admin SSL	B05 400 x 700mm	5	3.95 m³
60-Fourth Floor Level for Admin SSL	B06 400 x 700mm	18	17.72 m³
60-Fourth Floor Level for Admin SSL	B07 400 x 700mm	17	15.97 m³
60-Fourth Floor Level for Admin SSL	B 250 x 700mm	14	6.64 m³
70-Fifth Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
70-Fifth Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
70-Fifth Floor Level for Admin SSL	B03 400 x 700mm	2	2.00 m³
70-Fifth Floor Level for Admin SSL	B04 400 x 700mm	6	7.32 m³
70-Fifth Floor Level for Admin SSL	B05 400 x 700mm	5	3.95 m³
70-Fifth Floor Level for Admin SSL	B06 400 x 700mm	18	17.75 m³
70-Fifth Floor Level for Admin SSL	B07 400 x 700mm	17	15.97 m³
70-Fifth Floor Level for Admin SSL	B 250 x 700mm	14	6.64 m³
80-Sixth Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
80-Sixth Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
80-Sixth Floor Level for Admin SSL	B03 400 x 700mm	2	2.00 m³
80-Sixth Floor Level for Admin SSL	B04 400 x 700mm	6	7.32 m³
80-Sixth Floor Level for Admin SSL	B05 400 x 700mm	5	3.95 m³
80-Sixth Floor Level for Admin SSL	B06 400 x 700mm	18	17.75 m³
80-Sixth Floor Level for Admin SSL	B07 400 x 700mm	17	15.97 m³
80-Sixth Floor Level for Admin SSL	B 250 x 700mm	14	6.64 m³
90-Roof Floor Level for Admin SSL	B01 400 x 700mm	2	1.94 m³
90-Roof Floor Level for Admin SSL	B02 400 x 700mm	2	1.94 m³
90-Roof Floor Level for Admin SSL	B03 400 x 700mm	2	2.00 m³
90-Roof Floor Level for Admin SSL	B04 400 x 700mm	6	7.22 m³
90-Roof Floor Level for Admin SSL	B05 400 x 700mm	5	3.95 m³
90-Roof Floor Level for Admin SSL	B06 400 x 700mm	18	17.75 m³
90-Roof Floor Level for Admin SSL	B07 400 x 700mm	17	15.97 m³
90-Roof Floor Level for Admin SSL	B 250 x 700mm	14	6.64 m³
100-Upper Roof Floor Level for Admin SSL	B01 250 x 700mm	12	5.66 m³
100-Upper Roof Floor Level for Admin SSL	B04 400 x 700mm	4	4.99 m³
100-Upper Roof Floor Level for Admin SSL	B* 250 x 700mm	6	5.31 m³
1139			875.63 m³

Rev	Description	Date
R00	ISSUED FOR CONSTRUCTION	19/1/2026

CODE | SUITABILITY DESCRIPTION

STATUS | PURPOSE OF ISSUE

PROJECT

MARBLE FACTORY

TITLE

QS SHEETS (FRAMING & STAIR MATERIAL TAKE OFF)

CLIENT

DRAWN BY	CHECKED BY	DATE
Khalid Atef	Checker	01/07/26

SCALE (@ A1) | PROJECT NUMBER KH 102

DRAWING NUMBER A112 | REV R00

01/11/2026 09:03:05 ص